




# OIL ANALYSIS REPORT

Sample Rating Trend

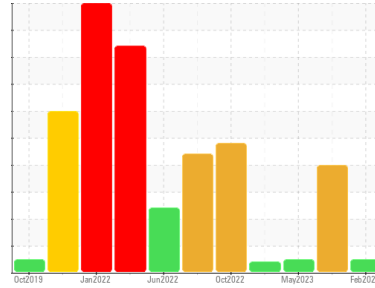

**NORMAL**



Machine Id  
**726045-310072**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0103971</b>	GFL0100556	GFL0083458
Sample Date	Client Info	<b>02 Feb 2024</b>	17 Jan 2024	23 May 2023
Machine Age	hrs	<b>20301</b>	175646	19024
Oil Age	hrs	<b>0</b>	175646	0
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>33</b>	22	40
Chromium	ppm ASTM D5185m >5	<b>1</b>	1	2
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >30	<b>6</b>	2	4
Lead	ppm ASTM D5185m >30	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >150	<b>1</b>	11	1
Tin	ppm ASTM D5185m >5	<b>&lt;1</b>	0	1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	3	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	79	55
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm ASTM D5185m 1010	<b>942</b>	1028	899
Calcium	ppm ASTM D5185m 1070	<b>1012</b>	1146	1086
Phosphorus	ppm ASTM D5185m 1150	<b>1028</b>	1094	1011
Zinc	ppm ASTM D5185m 1270	<b>1207</b>	1342	1273
Sulfur	ppm ASTM D5185m 2060	<b>3039</b>	3295	3120

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>4</b>	▲ 21	7
Sodium	ppm ASTM D5185m	<b>15</b>	▲ 318	13
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	▲ 99	4

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	1.4	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>8.7</b>	8.8	11.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.8</b>	22.6	21.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.0</b>	15.2	19.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.3</b>	9.4	8.4







# OIL ANALYSIS REPORT

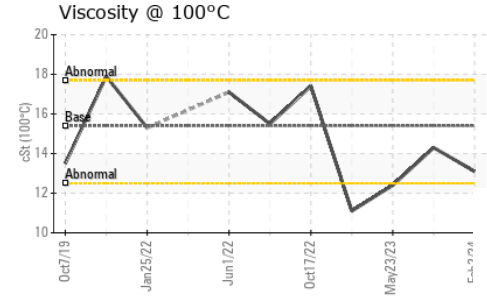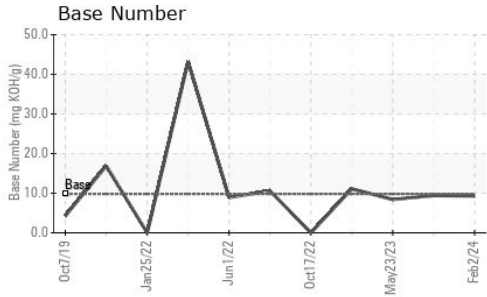

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	14.3	12.4

## GRAPHS

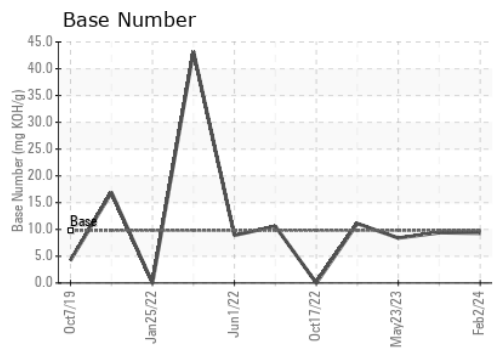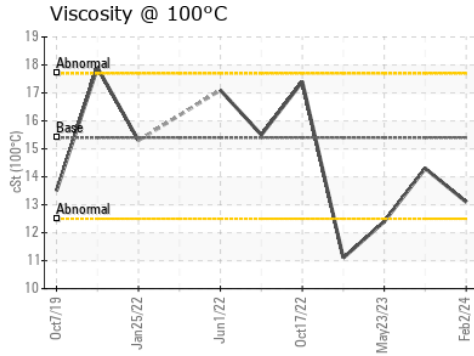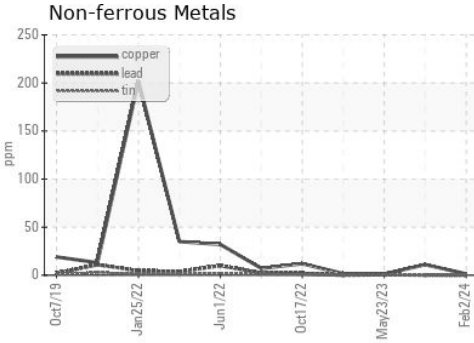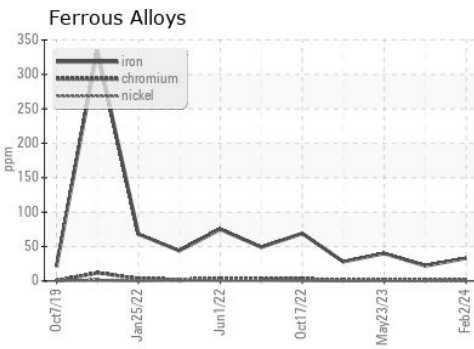

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103971      **Received** : 09 Feb 2024  
**Lab Number** : 06084498      **Tested** : 09 Feb 2024  
**Unique Number** : 10871943      **Diagnosed** : 09 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Saul Castillo  
 saul.castillo@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)