


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

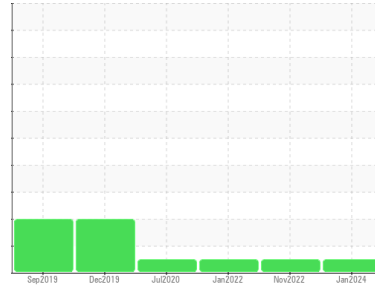

Machine Id  
**406354**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0110657</b>	PCA0071688	PCA0053409	
Sample Date	Client Info	<b>29 Jan 2024</b>	30 Nov 2022	26 Jan 2022	
Machine Age	mls	Client Info	<b>352255</b>	266480	199851
Oil Age	mls	Client Info	<b>16533</b>	66629	68410
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>15</b>	46	39
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	3	3
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>3</b>	4	<1
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	<1	<1
Aluminum	ppm ASTM D5185m >20	<b>8</b>	22	19
Lead	ppm ASTM D5185m >40	<b>0</b>	2	<1
Copper	ppm ASTM D5185m >330	<b>3</b>	28	16
Tin	ppm ASTM D5185m >15	<b>0</b>	1	1
Antimony	ppm ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>4</b>	3	2
Barium	ppm ASTM D5185m 0	<b>25</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>60</b>	58	61
Manganese	ppm ASTM D5185m 0	<b>0</b>	1	1
Magnesium	ppm ASTM D5185m 950	<b>867</b>	993	968
Calcium	ppm ASTM D5185m 1050	<b>1065</b>	1253	1158
Phosphorus	ppm ASTM D5185m 995	<b>1016</b>	951	953
Zinc	ppm ASTM D5185m 1180	<b>1165</b>	1315	1160
Sulfur	ppm ASTM D5185m 2600	<b>3129</b>	2867	1954

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	6	6
Sodium	ppm ASTM D5185m	<b>0</b>	4	0
Potassium	ppm ASTM D5185m >20	<b>6</b>	22	33



### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.8</b>	1.9	1.9
Nitration	Abs/cm *ASTM D7624 >20	<b>7.5</b>	11.8	12.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.3</b>	25.1	27.2

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.0</b>	19.0	20.9
Base Number (BN)	mg KOH/g ASTM D2896	<b>8.4</b>	5.4	5.3









# OIL ANALYSIS REPORT

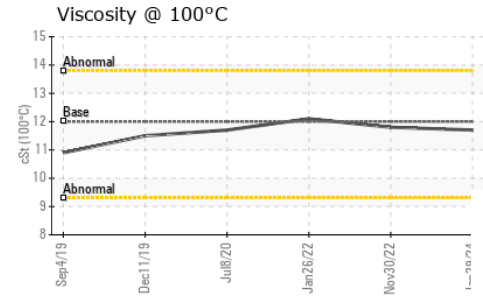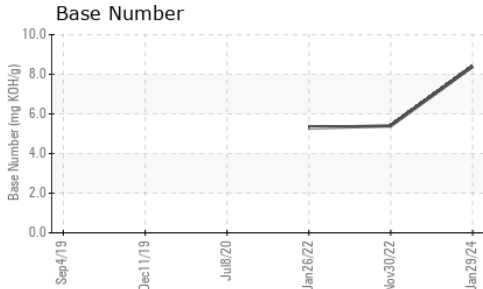

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.7</b>	11.8	12.1

## GRAPHS

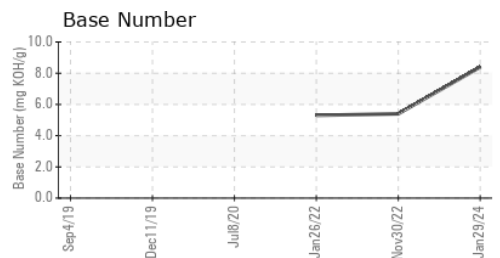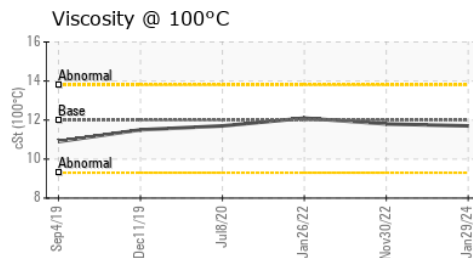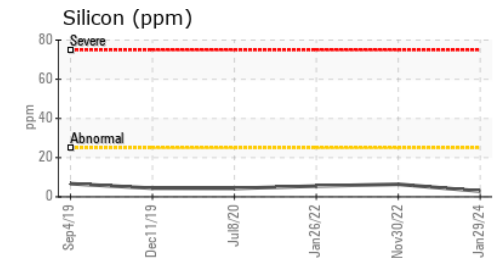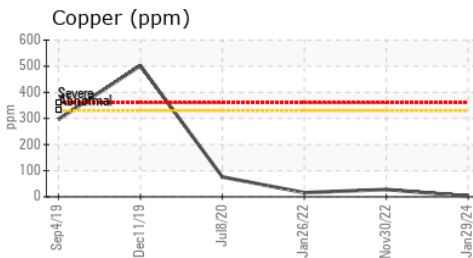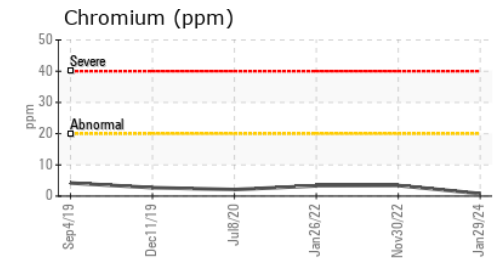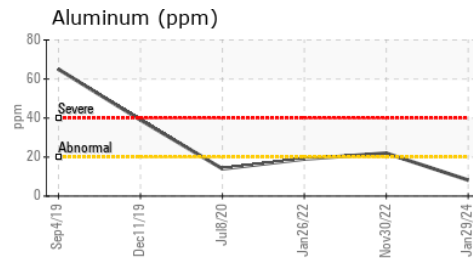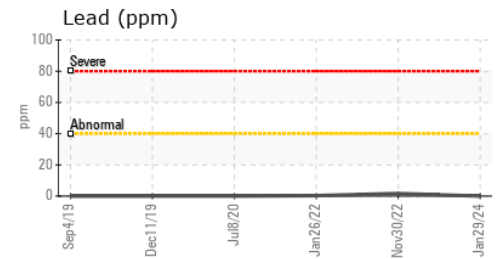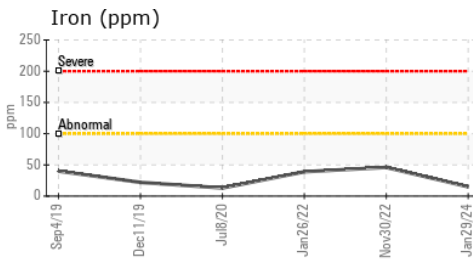

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0110657 **Received** : 09 Feb 2024  
**Lab Number** : 06084545 **Tested** : 12 Feb 2024  
**Unique Number** : 10871990 **Diagnosed** : 12 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #123**  
 66 KELLER AVENUE  
 LANCASTER, PA  
 US 17601  
 Contact: RON ROBERTS  
 roberts@millertransgroup.com  
 T: (717)945-6205  
 F: (717)945-5818

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)