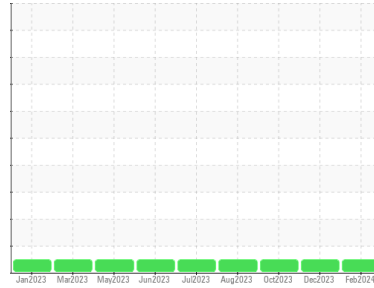


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**


Area  
**(54076Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A63421**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0112810</b>	PCA0112876	PCA0103813
Sample Date	Client Info	<b>05 Feb 2024</b>	07 Dec 2023	16 Oct 2023
Machine Age	mls Client Info	<b>245693</b>	211404	181720
Oil Age	mls Client Info	<b>63973</b>	29684	61676
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

**CONTAMINATION**

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

**WEAR METALS**

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>21</b>	17	31
Chromium	ppm ASTM D5185m >5	<b>1</b>	2	2
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >30	<b>8</b>	8	24
Lead	ppm ASTM D5185m >30	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >150	<b>33</b>	19	34
Tin	ppm ASTM D5185m >5	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

**ADDITIVES**

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>2</b>	0	0
Barium	ppm ASTM D5185m 0	<b>25</b>	12	0
Molybdenum	ppm ASTM D5185m 50	<b>65</b>	79	62
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 950	<b>899</b>	1228	1000
Calcium	ppm ASTM D5185m 1050	<b>1076</b>	1342	1132
Phosphorus	ppm ASTM D5185m 995	<b>956</b>	1239	967
Zinc	ppm ASTM D5185m 1180	<b>1167</b>	1547	1263
Sulfur	ppm ASTM D5185m 2600	<b>2441</b>	3356	2063

**CONTAMINANTS**

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>6</b>	8	8
Sodium	ppm ASTM D5185m	<b>0</b>	0	3
Potassium	ppm ASTM D5185m >20	<b>22</b>	15	58



**INFRA-RED**

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.8</b>	0.5	1
Nitration	Abs/cm *ASTM D7624 >20	<b>9.8</b>	8.0	10.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.9</b>	19.5	22.1

**FLUID DEGRADATION**

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.9</b>	15.9	19.6
Base Number (BN)	mg KOH/g ASTM D2896	<b>5.6</b>	7.7	5.6





# OIL ANALYSIS REPORT

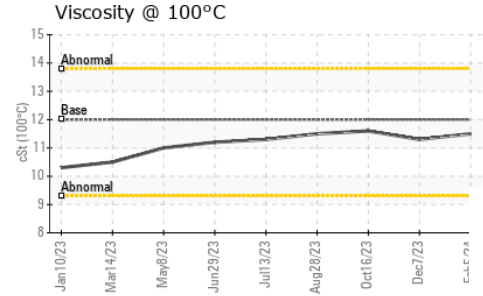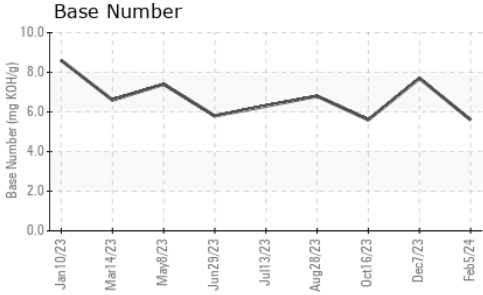

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.3	11.6

## GRAPHS

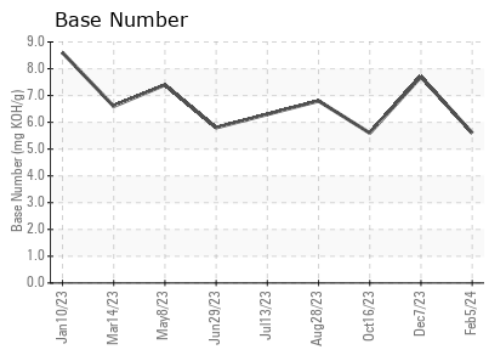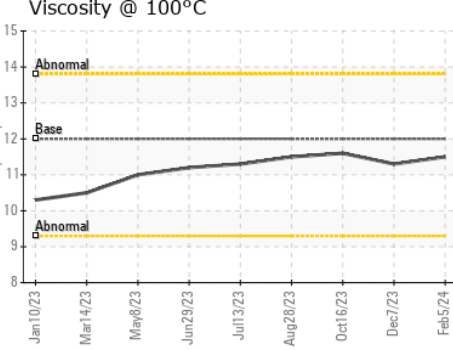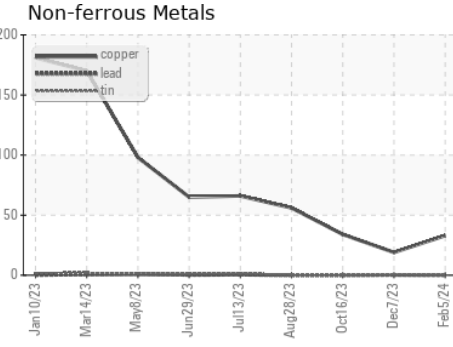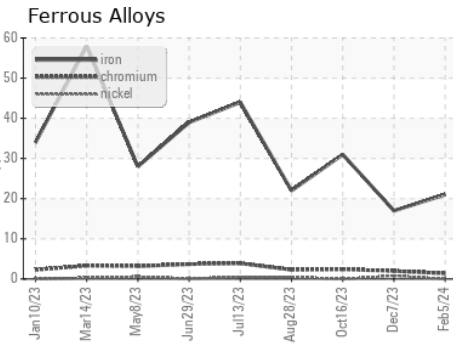

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112810 **Received** : 09 Feb 2024  
**Lab Number** : 06084560 **Tested** : 12 Feb 2024  
**Unique Number** : 10872005 **Diagnosed** : 12 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1364 - Berkeley-Mt. Vernon**  
 5100 Lake Terrace NE  
 Mt. Vernon, IL  
 US 62864  
 Contact: Erien White  
 ewhite@transervice.com  
 T: (618)244-8726  
 F: (618)244-8791

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)