




OIL ANALYSIS REPORT

Sample Rating Trend

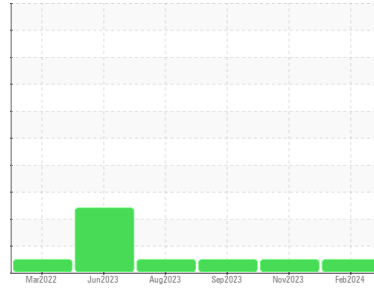

NORMAL



Machine Id
29M
 Component
Gasoline Engine
 Fluid
MOBIL 1 5W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0100925	GFL0086810	GFL0086871
Sample Date	Client Info		06 Feb 2024	28 Nov 2023	08 Sep 2023
Machine Age	mls	Client Info	280516	280516	265994
Oil Age	mls	Client Info	265994	280516	265994
Oil Changed	Client Info		Not Chngd	Not Chngd	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	31	23	28
Chromium	ppm	ASTM D5185m >20	1	1	1
Nickel	ppm	ASTM D5185m >5	<1	1	1
Titanium	ppm	ASTM D5185m	5	6	4
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >40	15	17	15
Lead	ppm	ASTM D5185m >50	0	0	0
Copper	ppm	ASTM D5185m >155	3	3	4
Tin	ppm	ASTM D5185m >10	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 94	30	31	25
Barium	ppm	ASTM D5185m 0.0	0	<1	0
Molybdenum	ppm	ASTM D5185m 0.0	220	205	252
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1388	562	540	582
Calcium	ppm	ASTM D5185m 820	1305	1214	1379
Phosphorus	ppm	ASTM D5185m 720	718	679	716
Zinc	ppm	ASTM D5185m 780	923	802	867
Sulfur	ppm	ASTM D5185m 2240	2154	1982	2523

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	22	23	28
Sodium	ppm	ASTM D5185m >400	5	4	4
Potassium	ppm	ASTM D5185m >20	1	0	<1

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	13.8	12.6	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.0	23.6	23.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.4	18.6	18.3
Base Number (BN)	mg KOH/g	ASTM D2896	4.5	3.5	3.8







OIL ANALYSIS REPORT

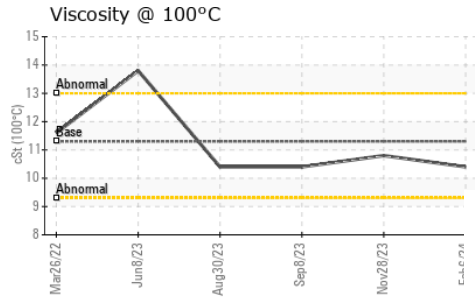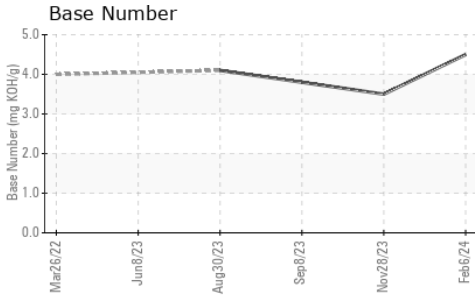

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.3	10.4	10.8	10.4

GRAPHS

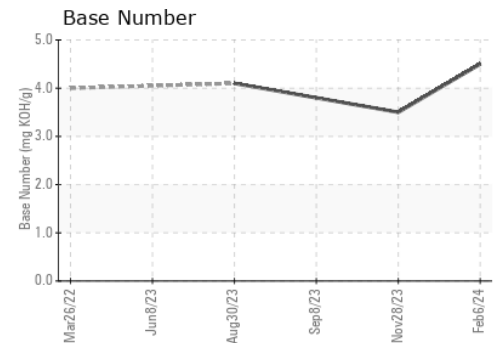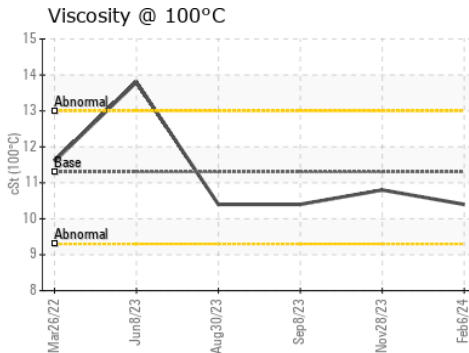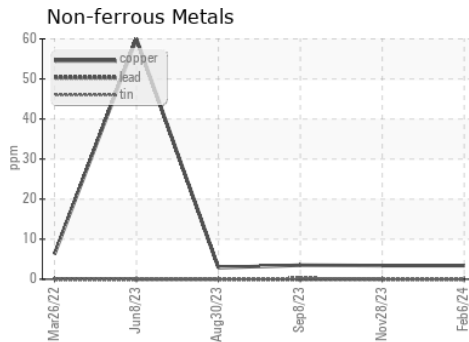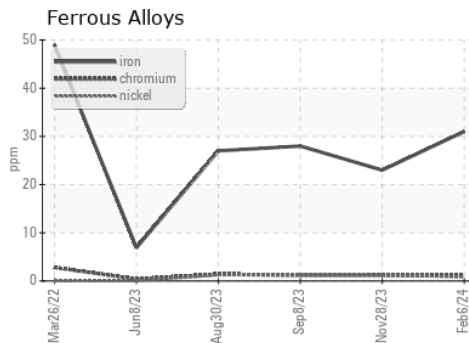

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0100925
Lab Number : 06085598
Unique Number : 10873043
Test Package : FLEET

Received : 12 Feb 2024
Tested : 12 Feb 2024
Diagnosed : 13 Feb 2024 - Angela Borella

GFL Environmental - 419 - Metro Saginaw
 6950 N Michigan
 Saginaw, MI
 US 48604

Contact: Jeremy Hines
 jhines@gflenv.com

T: (800)684-1277

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)