




OIL ANALYSIS REPORT

Sample Rating Trend

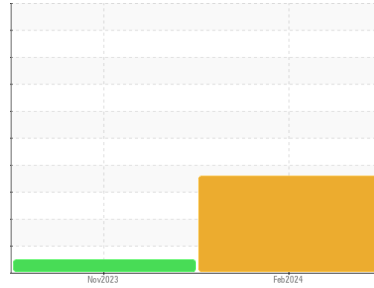

DIRT



Machine Id
426145-4623

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

▲ Wear

All component wear rates are normal.

▲ Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Light fuel dilution occurring.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0103969	GFL0100484	---
Sample Date	Client Info			07 Feb 2024	16 Nov 2023	---
Machine Age	hrs	Client Info		18633	18320	---
Oil Age	hrs	Client Info		0	18320	---
Oil Changed	Client Info			Changed	Not Changd	---
Sample Status				ABNORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	67	17	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	▲ 8	6	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	111	32	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	234	397	---
Barium	ppm	ASTM D5185m	0	19	2	---
Molybdenum	ppm	ASTM D5185m	60	127	128	---
Manganese	ppm	ASTM D5185m	0	9	5	---
Magnesium	ppm	ASTM D5185m	1010	660	723	---
Calcium	ppm	ASTM D5185m	1070	1550	1555	---
Phosphorus	ppm	ASTM D5185m	1150	677	738	---
Zinc	ppm	ASTM D5185m	1270	850	901	---
Sulfur	ppm	ASTM D5185m	2060	2333	2716	---






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	▲ 25	19	---
Sodium	ppm	ASTM D5185m		13	11	---
Potassium	ppm	ASTM D5185m	>20	22	18	---
Fuel	%	ASTM D3524	>5	▲ 3.8	<1.0	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	11.3	5.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.9	22.8	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.4	15.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.8	10.1	---







OIL ANALYSIS REPORT

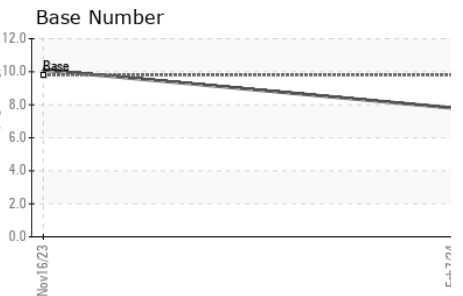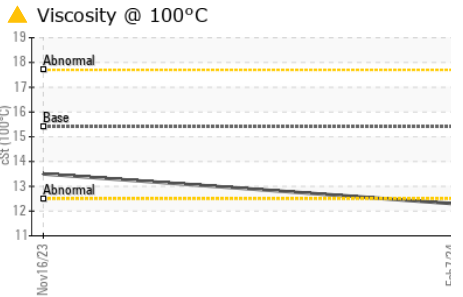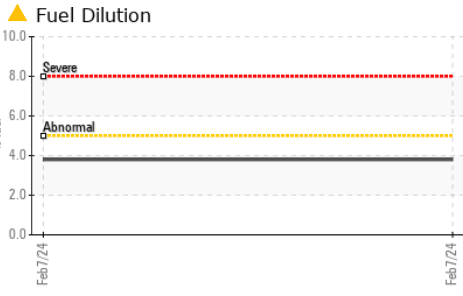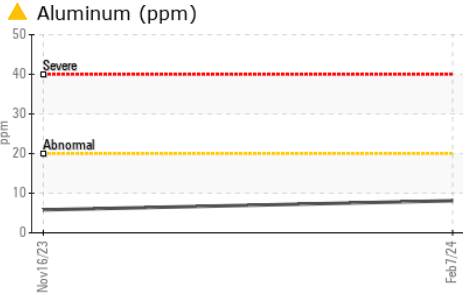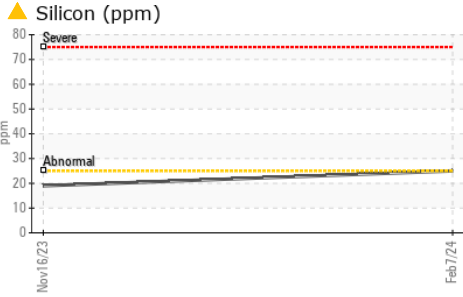

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 12.3	13.5	---

GRAPHS

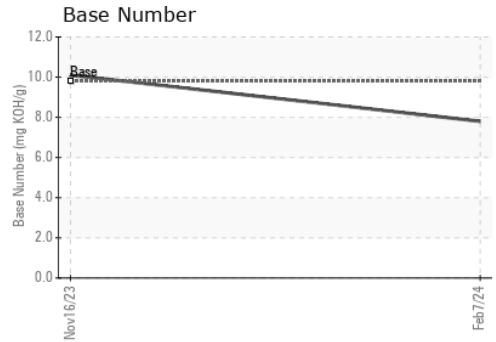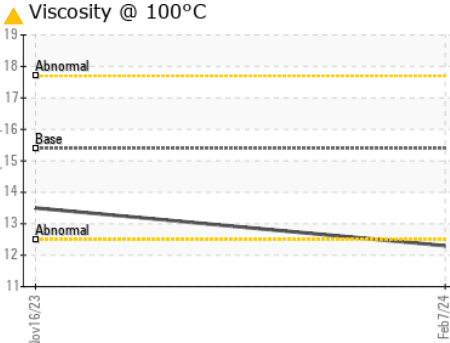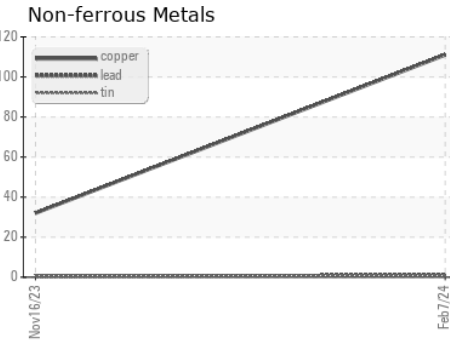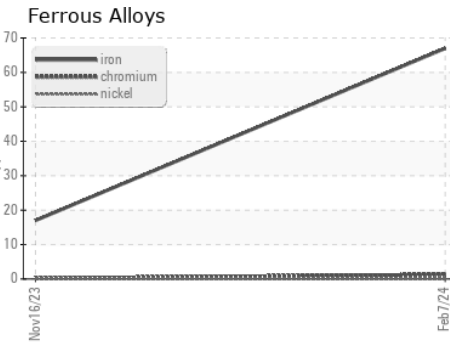

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0103969 **Received** : 12 Feb 2024
Lab Number : 06085604 **Tested** : 14 Feb 2024
Unique Number : 10873049 **Diagnosed** : 14 Feb 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 865 - East Mount Hauling
 7213 East Mount Houston Road
 Houston, TX
 US 77050
 Contact: Saul Castillo
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: