




# OIL ANALYSIS REPORT

Sample Rating Trend

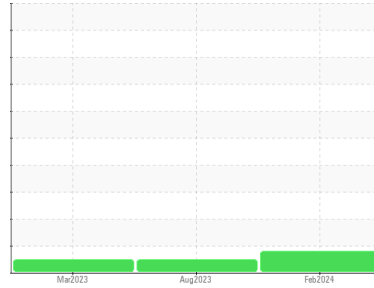

**SOOT**



Machine Id  
**525065-130**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is an abnormal amount of solids and carbon present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0108494</b>	GFL0066045	GFL0060330
Sample Date	Client Info	<b>06 Feb 2024</b>	23 Aug 2023	01 Mar 2023
Machine Age	hrs	<b>0</b>	0	12745
Oil Age	hrs	<b>0</b>	0	500
Oil Changed	Client Info	<b>N/A</b>	N/A	Changed
Sample Status		<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>80	<b>37</b>	44	35
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>4</b>	6	6
Lead	ppm	ASTM D5185m	>30	<b>10</b>	5	4
Copper	ppm	ASTM D5185m	>150	<b>4</b>	1	2
Tin	ppm	ASTM D5185m	>5	<b>1</b>	3	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	<b>5</b>	19	19
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	60	<b>58</b>	65	64
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	1010	<b>1014</b>	993	869
Calcium	ppm	ASTM D5185m	1070	<b>1157</b>	1175	1157
Phosphorus	ppm	ASTM D5185m	1150	<b>1021</b>	1044	976
Zinc	ppm	ASTM D5185m	1270	<b>1263</b>	1294	1188
Sulfur	ppm	ASTM D5185m	2060	<b>2912</b>	3704	2903

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	5	6
Sodium	ppm	ASTM D5185m		<b>2</b>	4	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	3
Fuel	%	ASTM D3524	>5	<b>&lt;1.0</b>	<1.0	<1.0

## INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	<b>▲ 3.3</b>	2.2	1.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.3</b>	8.4	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.2</b>	21.9	20.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.2</b>	14.0	14.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>5.7</b>	7.9	8.0







# OIL ANALYSIS REPORT

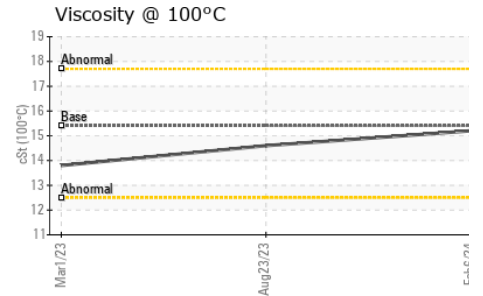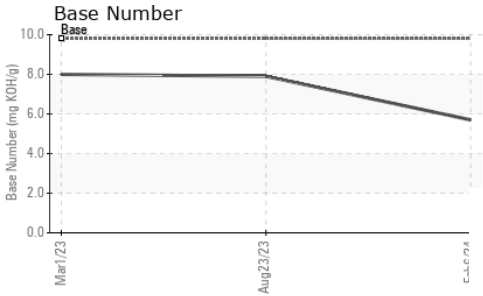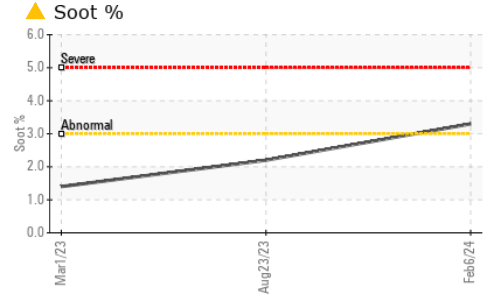

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	15.2	14.6

## GRAPHS

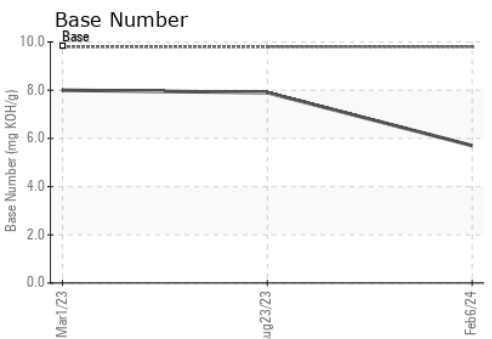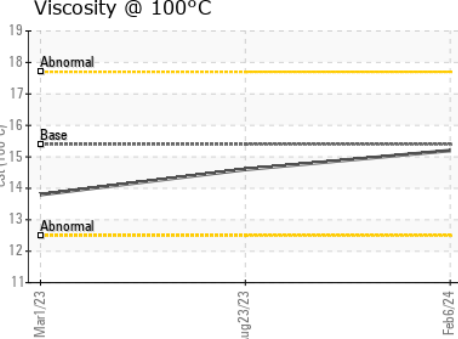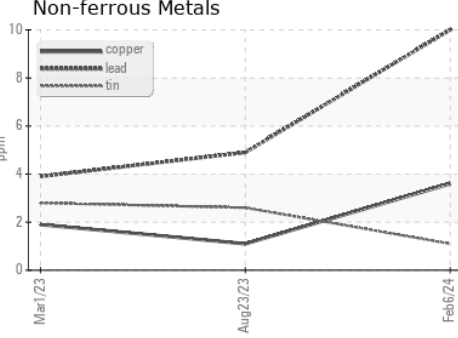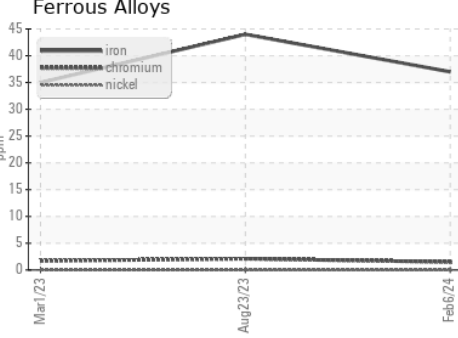

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108494      **Received** : 12 Feb 2024  
**Lab Number** : 06085648      **Tested** : 13 Feb 2024  
**Unique Number** : 10873093      **Diagnosed** : 13 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 904 - Chippewa Falls HC**  
 11888 & 11863 30th Avenue  
 Chippewa Falls, WI  
 US 54729  
 Contact: Andy Kane

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (715)202-3420  
F: