




# OIL ANALYSIS REPORT

## Sample Rating Trend

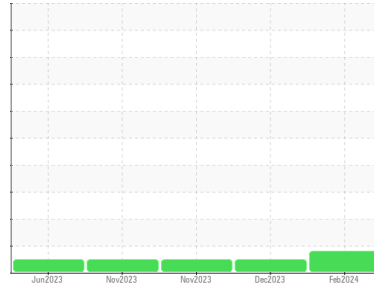

WEAR



Machine Id  
**817M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

An increase in the iron level is noted. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108703</b>	GFL0105770	GFL0101415
Sample Date	Client Info		<b>09 Feb 2024</b>	14 Dec 2023	27 Nov 2023
Machine Age	hrs	Client Info	<b>21341</b>	20908	20765
Oil Age	hrs	Client Info	<b>20908</b>	0	0
Oil Changed		Client Info	<b>Changed</b>	Changed	Changed
Sample Status			<b>ATTENTION</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>▲ 71</b>	2	10
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>6</b>	1	2
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	3	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	54	56
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>924</b>	905	893
Calcium	ppm	ASTM D5185m 1070	<b>1028</b>	968	997
Phosphorus	ppm	ASTM D5185m 1150	<b>958</b>	995	1007
Zinc	ppm	ASTM D5185m 1270	<b>1217</b>	1239	1209
Sulfur	ppm	ASTM D5185m 2060	<b>2839</b>	3135	2828

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	5	2
Sodium	ppm	ASTM D5185m	<b>2</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>3</b>	3	<1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.2	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.9</b>	5.2	8.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.9</b>	17.7	19.3


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.4</b>	13.3	15.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.0</b>	9.2	8.3




# OIL ANALYSIS REPORT


## ▲ Ferrous Alloys

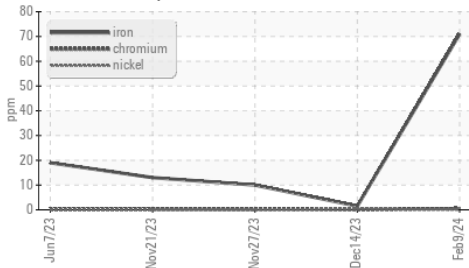

## Base Number

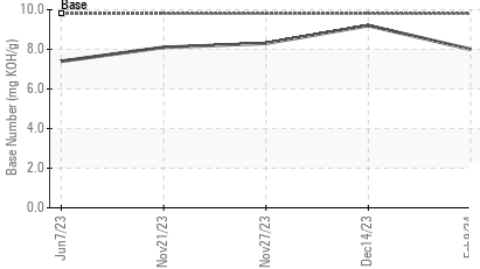

## Viscosity @ 100°C

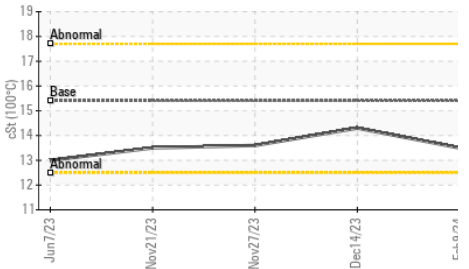


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	14.3

## GRAPHS


### ▲ Ferrous Alloys

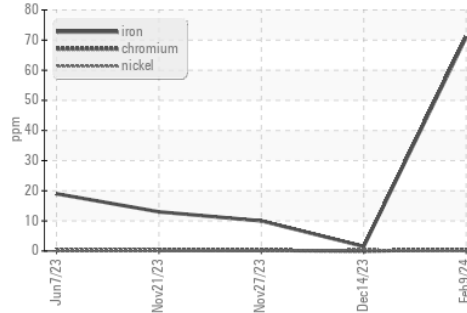


### Non-ferrous Metals

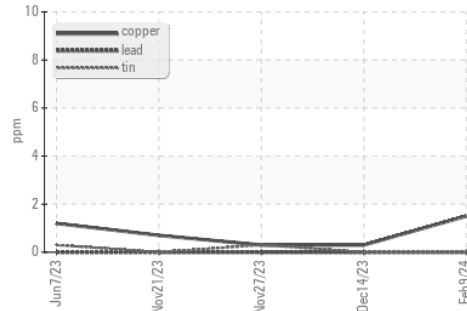

### Viscosity @ 100°C

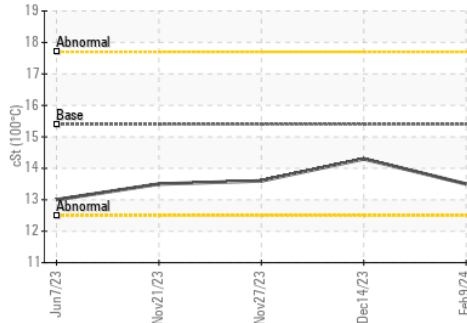

### Base Number

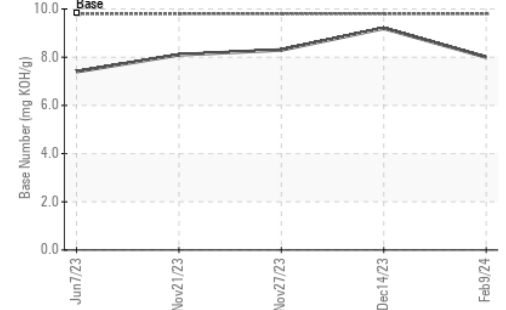

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0108703  
 Lab Number : 06086850  
 Unique Number : 10874295  
 Test Package : FLEET

Received : 13 Feb 2024  
 Tested : 13 Feb 2024  
 Diagnosed : 14 Feb 2024 - Sean Felton

GFL Environmental - 415 - Michigan East  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)