




# OIL ANALYSIS REPORT

Sample Rating Trend

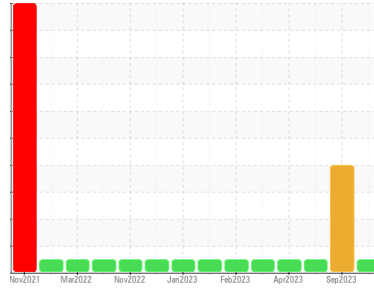

**NORMAL**



Machine Id  
**724015-361624**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0092123</b>	GFL0084585	GFL0078152
Sample Date	Client Info		<b>08 Feb 2024</b>	18 Sep 2023	04 May 2023
Machine Age	mls	Client Info	<b>235923</b>	0	214537
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>54</b>	▲ 150	30
Chromium	ppm	ASTM D5185m >5	<b>2</b>	▲ 8	2
Nickel	ppm	ASTM D5185m >2	<b>2</b>	3	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >30	<b>6</b>	▲ 13	3
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	2	0
Copper	ppm	ASTM D5185m >150	<b>2</b>	7	2
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	2	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	2	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	66	55
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m 1010	<b>983</b>	1063	941
Calcium	ppm	ASTM D5185m 1070	<b>1081</b>	1217	1023
Phosphorus	ppm	ASTM D5185m 1150	<b>1097</b>	1113	979
Zinc	ppm	ASTM D5185m 1270	<b>1330</b>	1381	1241
Sulfur	ppm	ASTM D5185m 2060	<b>3024</b>	3456	3439

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>8</b>	▲ 24	6
Sodium	ppm	ASTM D5185m	<b>7</b>	8	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.7</b>	1.9	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.1</b>	18.2	10.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.3</b>	35.1	19.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.9</b>	32.6	18.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.5</b>	5.7	7.4







# OIL ANALYSIS REPORT

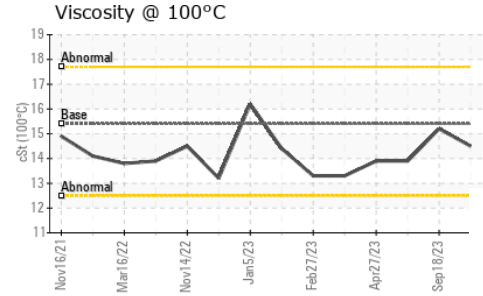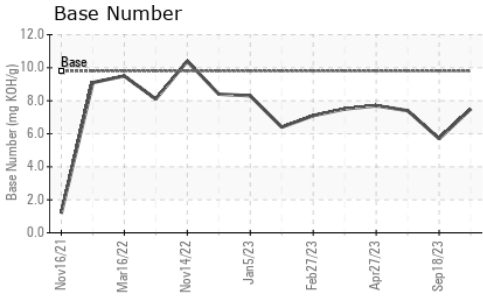

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.5</b>	15.2	13.9

## GRAPHS

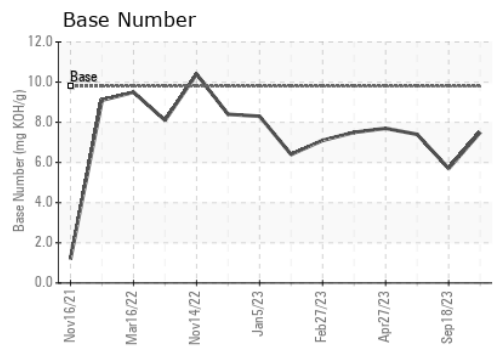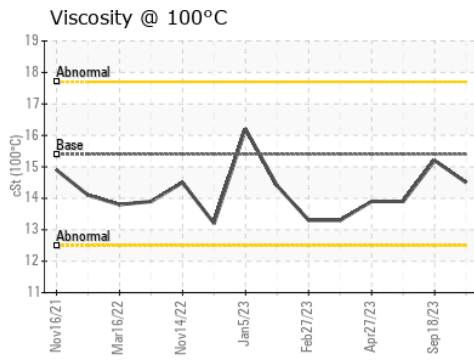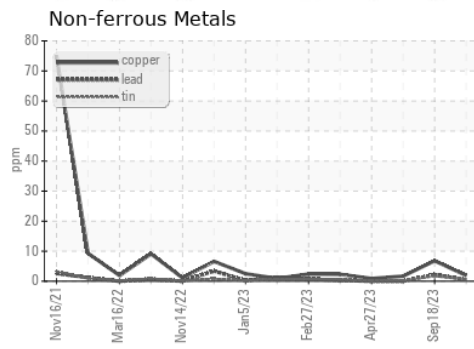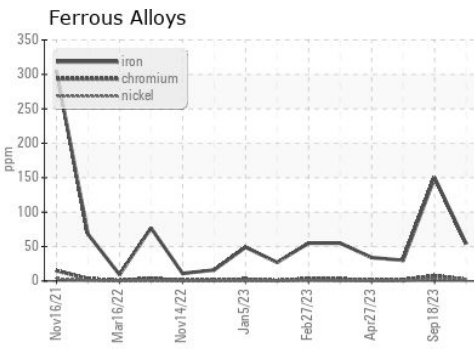

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092123      **Received** : 13 Feb 2024  
**Lab Number** : 06088050      **Tested** : 14 Feb 2024  
**Unique Number** : 10875495      **Diagnosed** : 14 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 856 - Houston South**  
 8515 Highway 6 South  
 Houston, TX  
 US 77083  
 Contact: Apolinar Zacarias  
 pzacariascano@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)