




OIL ANALYSIS REPORT

Sample Rating Trend

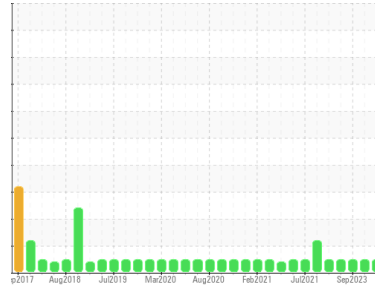

NORMAL



Machine Id
CUMMINS 10804

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (8 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0109075	GFL0086190	GFL0086218
Sample Date	Client Info	08 Feb 2024	27 Sep 2023	12 Sep 2023
Machine Age	hrs	16346	14854	14854
Oil Age	hrs	16346	15890	15764
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	18	9	7
Chromium	ppm	ASTM D5185m >20	1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	11	7	7
Lead	ppm	ASTM D5185m >40	0	0	0
Copper	ppm	ASTM D5185m >330	<1	<1	<1
Tin	ppm	ASTM D5185m >15	0	0	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 250	12	11	19
Barium	ppm	ASTM D5185m 10	8	0	0
Molybdenum	ppm	ASTM D5185m 100	65	62	62
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 450	728	804	803
Calcium	ppm	ASTM D5185m 3000	1004	1098	1129
Phosphorus	ppm	ASTM D5185m 1150	808	928	951
Zinc	ppm	ASTM D5185m 1350	1045	1156	1119
Sulfur	ppm	ASTM D5185m 4250	2697	2877	3376

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	3	3	3
Sodium	ppm	ASTM D5185m >216	0	<1	2
Potassium	ppm	ASTM D5185m >20	2	14	<1
Fuel	%	ASTM D3524 >5	0.5	<1.0	0.6

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.7	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	8.4	7.7	6.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.1	18.1	16.5

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.2	13.7	11.0
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	6.6	6.9	7.5







OIL ANALYSIS REPORT

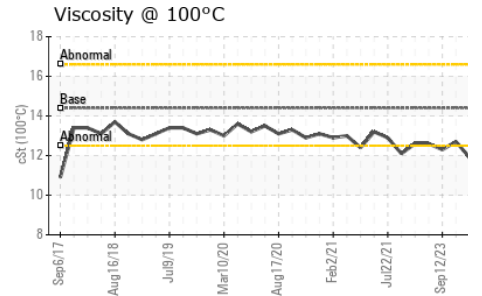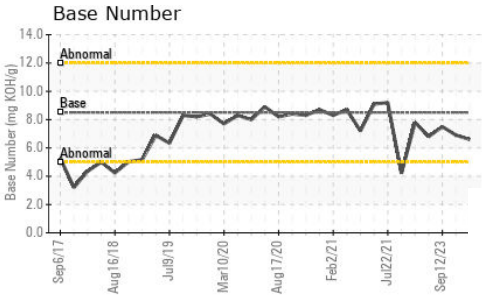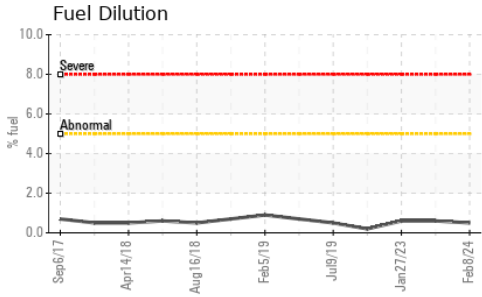

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	11.9	12.7	12.3

GRAPHS

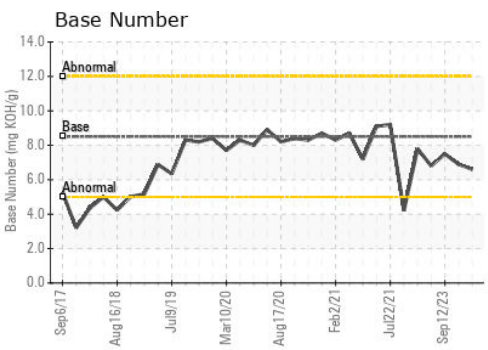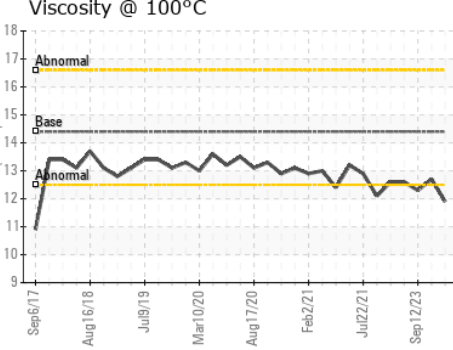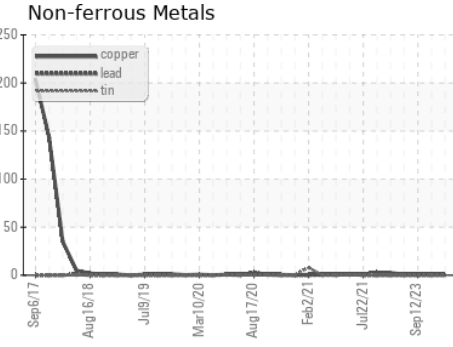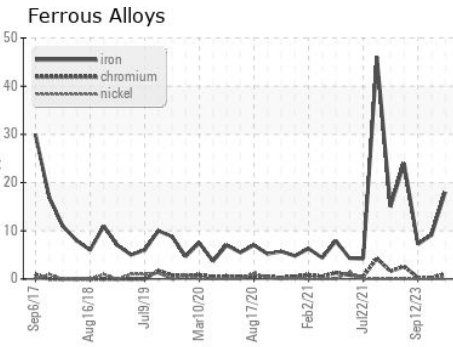

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109075 **Received** : 14 Feb 2024
Lab Number : **06088471** **Tested** : 15 Feb 2024
Unique Number : 10875916 **Diagnosed** : 15 Feb 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 009 - Fairburn
 6905 Roosevelt Hwy
 Fairburn, GA
 US 30213
 Contact: Eric Jones
 erjones@gflenv.com
 T: (678)630-9927
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)