


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

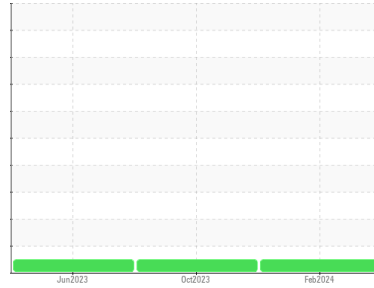

Area  
**(AU393U) Supermarket - Tractor**  
Machine Id  
**FREIGHTLINER 107A1802**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0116973</b>	PCA0104071	PCA0099860
Sample Date	Client Info		<b>08 Feb 2024</b>	18 Oct 2023	17 Jun 2023
Machine Age	mls	Client Info	<b>190188</b>	179843	168711
Oil Age	mls	Client Info	<b>10345</b>	11132	10047
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>7</b>	11	8
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	5	3
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>4</b>	6	5
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>7</b>	4	8
Barium	ppm	ASTM D5185m 0	<b>8</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>67</b>	62	69
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>876</b>	863	890
Calcium	ppm	ASTM D5185m 1050	<b>1001</b>	1042	1108
Phosphorus	ppm	ASTM D5185m 995	<b>847</b>	892	1014
Zinc	ppm	ASTM D5185m 1180	<b>1162</b>	1137	1191
Sulfur	ppm	ASTM D5185m 2600	<b>2659</b>	2470	3057

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	<b>0</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.5</b>	7.9	6.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.3</b>	19.3	18.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	14.8	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.8</b>	7.2	9.0





# OIL ANALYSIS REPORT

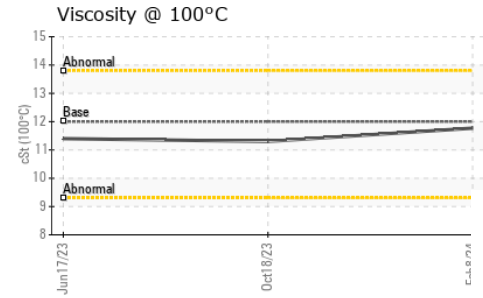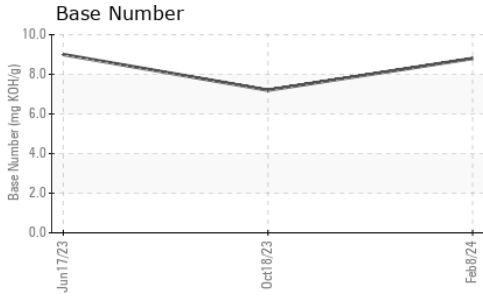

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.77</b>	11.3	11.4

## GRAPHS

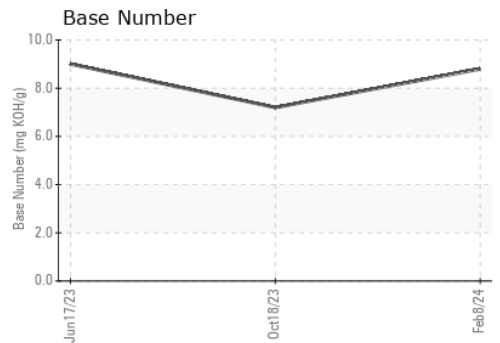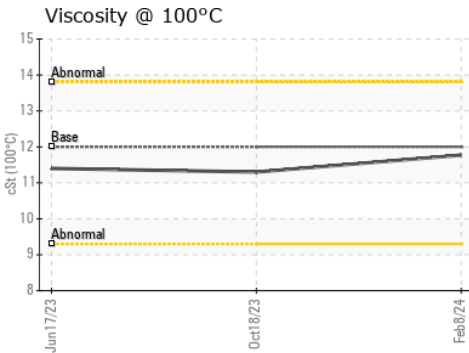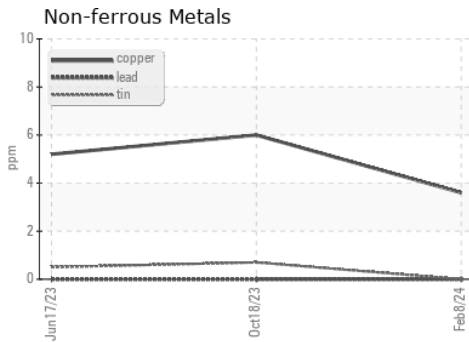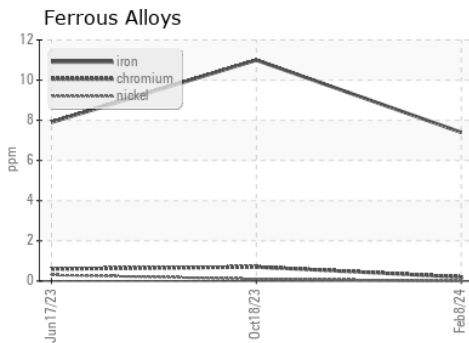

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116973      **Received** : 14 Feb 2024  
**Lab Number** : 06088479      **Tested** : 19 Feb 2024  
**Unique Number** : 10875924      **Diagnosed** : 19 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET

**Transervice - Shop 1071 - Supermarket-Dayton**  
 60 A Tower Road  
 Dayton, NJ  
 US 08810  
 Contact: Brian Quinn  
 bquinn@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: