


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

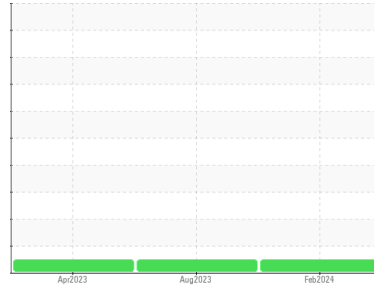

Area  
**(AU697W) Supermarket - Tractor**  
Machine Id  
**FREIGHTLINER 107A1874**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0116969</b>	PCA0104107	PCA0097055
Sample Date	Client Info		<b>05 Feb 2024</b>	26 Aug 2023	27 Apr 2023
Machine Age	mls	Client Info	<b>206198</b>	191078	179562
Oil Age	mls	Client Info	<b>15120</b>	11516	12112
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>80	<b>14</b>	21	10
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>3</b>	5	2
Lead	ppm	ASTM D5185m	>30	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>150	<b>9</b>	11	8
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	2	<b>18</b>	8	18
Barium	ppm	ASTM D5185m	0	<b>8</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>68</b>	68	63
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>843</b>	1020	906
Calcium	ppm	ASTM D5185m	1050	<b>1021</b>	1208	1072
Phosphorus	ppm	ASTM D5185m	995	<b>846</b>	1055	998
Zinc	ppm	ASTM D5185m	1180	<b>1173</b>	1355	1231
Sulfur	ppm	ASTM D5185m	2600	<b>2554</b>	3491	3569

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	6	4
Sodium	ppm	ASTM D5185m		<b>0</b>	2	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	6	2



## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.8	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.7</b>	8.6	6.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	20.8	16.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.0</b>	15.8	12.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.8</b>	6.9	7.7





# OIL ANALYSIS REPORT

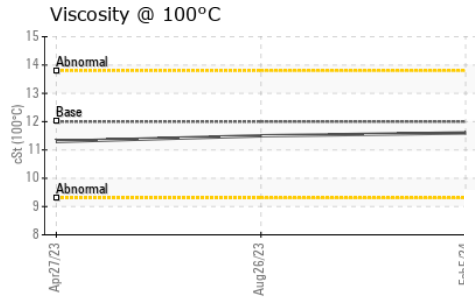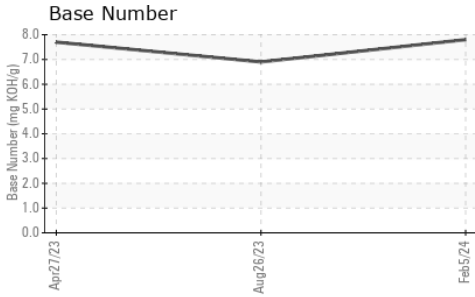

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.6</b>	11.5

## GRAPHS

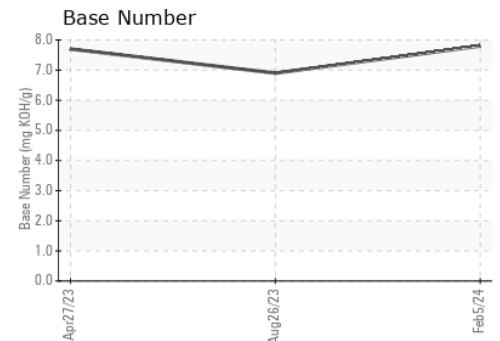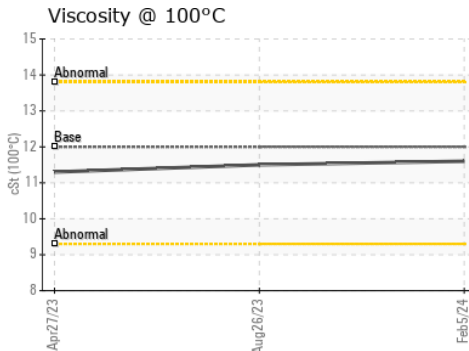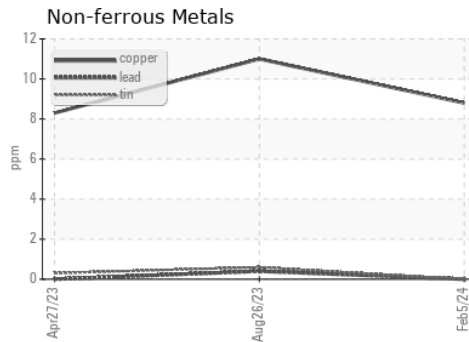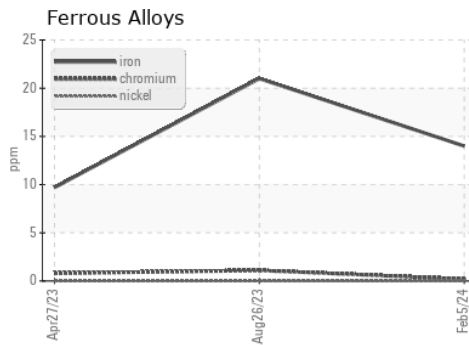

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116969  
**Lab Number** : 06088480  
**Unique Number** : 10875925  
**Test Package** : FLEET

**Received** : 14 Feb 2024  
**Tested** : 15 Feb 2024  
**Diagnosed** : 15 Feb 2024 - Wes Davis

**Transervice - Shop 1071 - Supermarket-Dayton**  
 60 A Tower Road  
 Dayton, NJ  
 US 08810  
 Contact: Brian Quinn  
 bquinn@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: