




# OIL ANALYSIS REPORT

Sample Rating Trend

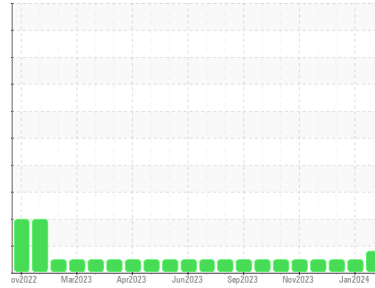

**WEAR**



Machine Id  
**913005**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Valve wear is indicated.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0100271</b>	GFL0100218	GFL0100188
Sample Date	Client Info		<b>09 Feb 2024</b>	10 Jan 2024	15 Dec 2023
Machine Age	hrs	Client Info	<b>47098</b>	3920	47098
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>22</b>	8	3
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>▲ 16</b>	7	4
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	<1	1
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>17</b>	10	9
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	<1	4
Barium	ppm	ASTM D5185m 0	<b>8</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>93</b>	59	57
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1420</b>	971	890
Calcium	ppm	ASTM D5185m 1070	<b>1543</b>	1038	995
Phosphorus	ppm	ASTM D5185m 1150	<b>1368</b>	1049	914
Zinc	ppm	ASTM D5185m 1270	<b>1798</b>	1243	1178
Sulfur	ppm	ASTM D5185m 2060	<b>4494</b>	2970	2882

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	4	4
Sodium	ppm	ASTM D5185m	<b>4</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>6</b>	0	1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.6</b>	0.4	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.3</b>	6.7	5.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	18.2	18.1


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.5</b>	14.2	13.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.5</b>	6.8	8.7




# OIL ANALYSIS REPORT


### ▲ Ferrous Alloys

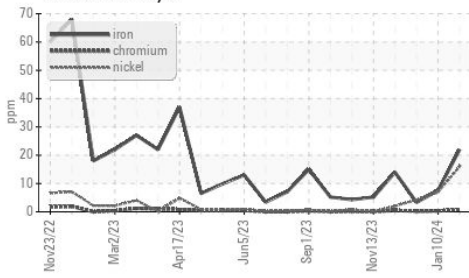

### Base Number

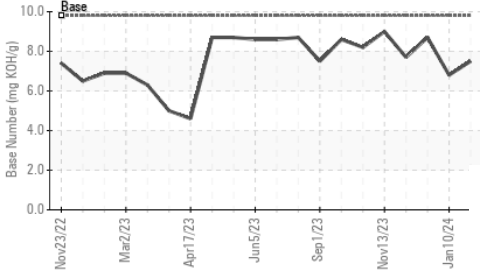

### Viscosity @ 100°C

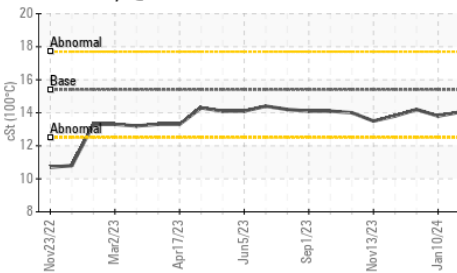


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.04</b>	13.8	14.2

### GRAPHS


### ▲ Ferrous Alloys

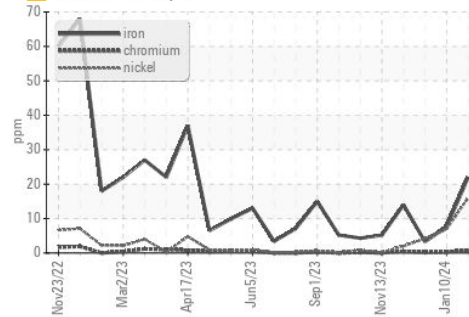


### Non-ferrous Metals

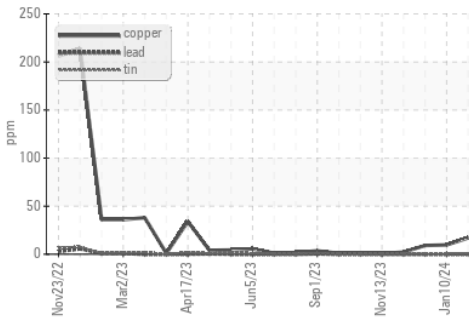

### Viscosity @ 100°C

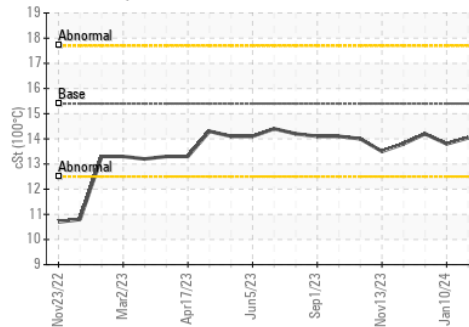

### Base Number

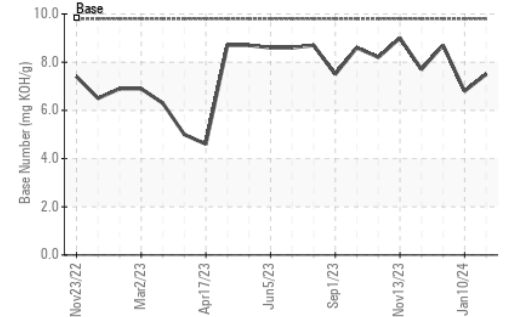

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0100271  
**Lab Number** : 06088483  
**Unique Number** : 10875928  
**Test Package** : FLEET

**Received** : 14 Feb 2024  
**Tested** : 19 Feb 2024  
**Diagnosed** : 19 Feb 2024 - Jonathan Hester

**GFL Environmental - 166 - Phenix City**  
 18 Old Brickyard Rd  
 Phenix City, AL  
 US 36869  
 Contact: DEAN PEACE JR  
 dean.peace@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: