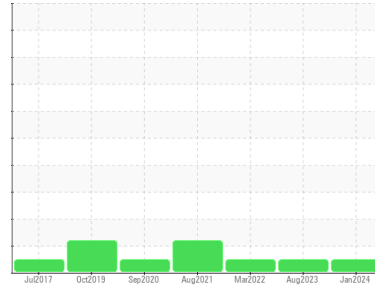


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**


Machine Id  
**26440**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (43 QTS)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0112368</b>	PCA0102780	PCA0068388
Sample Date	Client Info		<b>11 Jan 2024</b>	16 Aug 2023	29 Mar 2022
Machine Age	mls	Client Info	<b>386577</b>	293465	293465
Oil Age	mls	Client Info	<b>93112</b>	293465	12000
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

**CONTAMINATION**

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>26</b>	16	21
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	4
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	2
Copper	ppm	ASTM D5185m >330	<b>4</b>	3	3
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>1</b>	0	4
Barium	ppm	ASTM D5185m 0	<b>8</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>67</b>	63	58
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>920</b>	973	904
Calcium	ppm	ASTM D5185m 1050	<b>994</b>	1115	1095
Phosphorus	ppm	ASTM D5185m 995	<b>794</b>	992	1063
Zinc	ppm	ASTM D5185m 1180	<b>1202</b>	1244	1242
Sulfur	ppm	ASTM D5185m 2600	<b>2077</b>	3196	2173

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	5	6
Sodium	ppm	ASTM D5185m	<b>5</b>	11	11
Potassium	ppm	ASTM D5185m >20	<b>4</b>	2	2



**INFRA-RED**

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.1</b>	9.9	12.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.8</b>	20.8	25.3

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.5</b>	17.2	23.1
Base Number (BN)	mg KOH/g	ASTM D2896	<b>4.3</b>	6.0	5.3





# OIL ANALYSIS REPORT

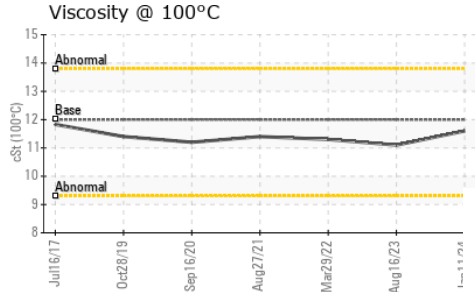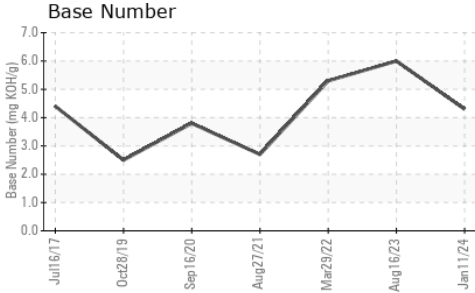

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.6</b>	11.1	11.3

## GRAPHS

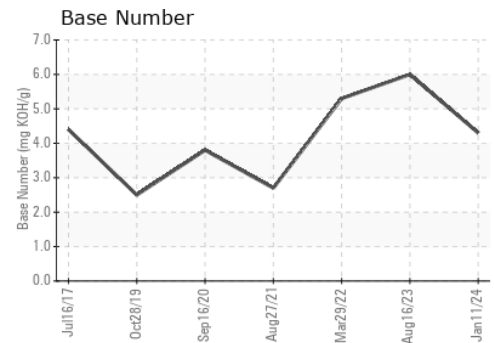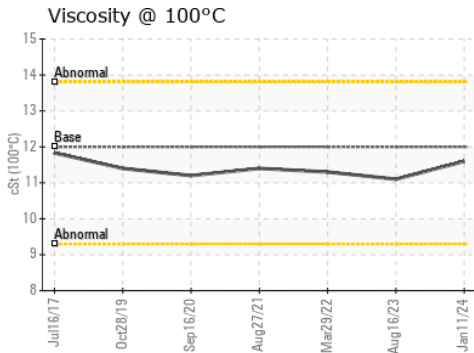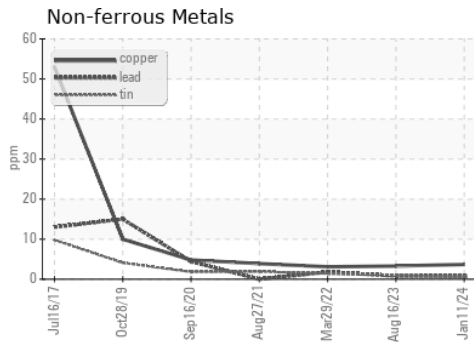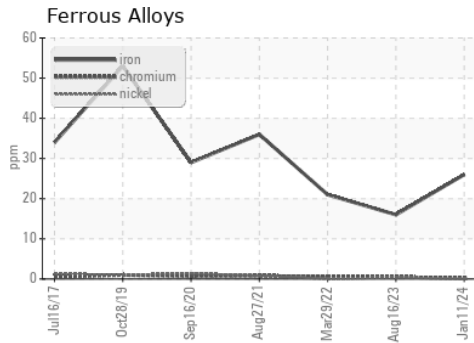

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112368  
**Lab Number** : 06088540  
**Unique Number** : 10875985  
**Test Package** : FLEET  
**Received** : 14 Feb 2024  
**Tested** : 15 Feb 2024  
**Diagnosed** : 15 Feb 2024 - Wes Davis

**PERDUE FARMS - DILLON**  
 2047 HWY 9 WEST  
 DILLON, SC  
 US 29536  
 Contact: KEVIN HOOKS  
 kevin.hooks@perdue.com  
 T: (843)841-8069  
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)