

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Component **Diesel Engine**

Fluid

PETRO CANADA DURON SHP 15W40 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


																																					1
																																					н
																																					н
																																					ł.
																																					Т
																																					Т
																																					÷
																																					н
																																					н
																																					ł.
																																					Т
																																					Т
																																					÷
																																					н
																																					н
																																					ł.
																																					Т
																																					Т
																																					÷
																																					н
2																																					н
																																					ł.
																																					Т
																																					Т
																																					ł.
																																					н
																				1																	н
																				-																	ł.
																				Γ.																	
							Г	Т	Т	Т			Г	Т	Т	Т	Т				1	Г	Т	Т	Т					Г	Т					Г	
	-	7	100	-	-	-	-	0.1		-	eb	10		-	-		201		-	Se	1	100	-	-	-	 22	-	Jai	1			-		-			-
14		JU	120	15		Jù	n Z		ь		-60	ZU	11.1		. P	e0,		0		Sei				- IV	ıar	22		Jai		JZ	3		Det	20	23		

SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0090002	GFL0099810	GFL0080553
Sample Date		Client Info		03 Feb 2024	22 Nov 2023	13 Oct 2023
Machine Age	hrs	Client Info		27232	42982	79952
Oil Age	hrs	Client Info		600	0	79952
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT		method	limit/base	current	history1	history2
			>3.0		<1.0	<1.0
Fuel		WC Method		<1.0		
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	25	3	15
Chromium	ppm	ASTM D5185m	>5	2	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	2	1	0
Lead	ppm	ASTM D5185m	>150	2	0	2
Copper	ppm	ASTM D5185m	>90	2	<1	2
Tin	ppm	ASTM D5185m	>5	1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
	1. 1			S 1	0	0
ADDITIVES	h h	method	limit/base	current	history1	history2
	ppm		limit/base			-
ADDITIVES		method		current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	0	current 5	history1 4	history2 2
ADDITIVES Boron Barium	ppm ppm	method ASTM D5185m ASTM D5185m	0	current 5 0	history1 4 0	history2 2 2
ADDITIVES Boron Barium Molybdenum	ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60	current 5 0 62	history1 4 0 61	history2 2 2 64
ADDITIVES Boron Barium Molybdenum Manganese	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0	current 5 0 62 <1	history1 4 0 61 0	history2 2 2 64 <1
ADDITIVES Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010	current 5 0 62 <1 964	history1 4 0 61 0 942	history2 2 64 <1 879
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070	current 5 0 62 <1 964 1107	history1 4 0 61 0 942 1089	history2 2 2 64 <1 879 1076
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150	Current 5 0 62 <1 964 1107 1079	history1 4 0 61 0 942 1089 1014	history2 2 2 64 <1 879 1076 1028
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270	current 5 0 62 <1 964 1107 1079 1239	history1 4 0 61 0 942 1089 1014 1234	history2 2 2 64 <1 879 1076 1028 1181
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060	Current 5 0 62 <1 964 1107 1079 1239 3668	history1 4 0 61 0 942 1089 1014 1234 3573	history2 2 2 64 <1 879 1076 1028 1181 2897
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm ppm TS	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	current 5 0 62 <1 964 1107 1079 1239 3668 current	history1 4 0 61 0 942 1089 1014 1234 3573 history1	history2 2 64 <1 879 1076 1028 1181 2897 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	current 5 0 62 <1 964 1107 1079 1239 3668 current 11	history1 4 0 61 0 942 1089 1014 1234 3573 history1 2	history2 2 64 <1 879 1076 1028 1181 2897 history2 7
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base	current 5 0 62 <1 964 1107 1079 1239 3668 current 11 3	history1 4 0 61 0 942 1089 1014 1234 3573 history1 2 <1	history2 2 64 <1 879 1076 1028 1181 2897 history2 7 3
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm TS	method ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 Imit/base >35	current 5 0 62 <1 964 1107 1079 1239 3668 current 11 3 28 current	history1 4 0 61 0 942 1089 1014 1234 3573 history1 2 <1 1 history1	history2 2 64 <1 879 1076 1028 1181 2897 history2 7 3 7 3 7 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 limit/base >35 >20 limit/base >7.5	current 5 0 62 <1 964 1107 1079 1239 3668 current 11 3 28 current 1	history1 4 0 61 0 942 1089 1014 1234 3573 history1 2 <1 1 history1 0.4	history2 2 2 64 <1 879 1076 1028 1181 2897 history2 7 3 7 3 7 history2 1
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm TS	method ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 Imit/base >35	current 5 0 62 <1 964 1107 1079 1239 3668 current 11 3 28 current	history1 4 0 61 0 942 1089 1014 1234 3573 history1 2 <1 1 history1	history2 2 64 <1 879 1076 1028 1181 2897 history2 7 3 7 3 7 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 imit/base >35 20 imit/base >7.5 >20 >30	current 5 0 62 <1 964 1107 1079 1239 3668 current 11 3 28 current 1 11.3 22.9	history1 4 0 61 0 942 1089 1014 1234 3573 history1 2 <1 1 history1 0.4 4.8 17.8	history2 2 2 64 <1 879 1076 1028 1181 2897 history2 7 3 7 history2 1 10.8 21.9
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRAD	ppm ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm ppm	method ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7415 method	0 0 0 1010 1070 1150 1270 2060 2060 2060 2060 2060 2060 2060 2	current 5 0 62 <1 964 1107 1079 1239 3668 current 11 3 28 current 1 1.3 2.8 current 1 1.3 2.9 current	history1 4 0 61 0 942 1089 1014 1234 3573 history1 2 <1 0.4 4.8 17.8	history2 2 2 64 <1 879 1076 1028 1181 2897 history2 7 3 7 1 10.8 21.9 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 imit/base >35 20 imit/base >7.5 >20 >30	current 5 0 62 <1 964 1107 1079 1239 3668 current 11 3 28 current 1 11.3 22.9	history1 4 0 61 0 942 1089 1014 1234 3573 history1 2 <1 1 history1 0.4 4.8 17.8	history2 2 2 64 <1 879 1076 1028 1181 2897 history2 7 3 7 history2 1 10.8 21.9



OIL ANALYSIS REPORT

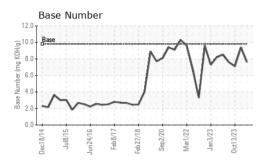



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.9	13.8
GRAPHS						


Ferrous Alloys

35

30

25 20

10

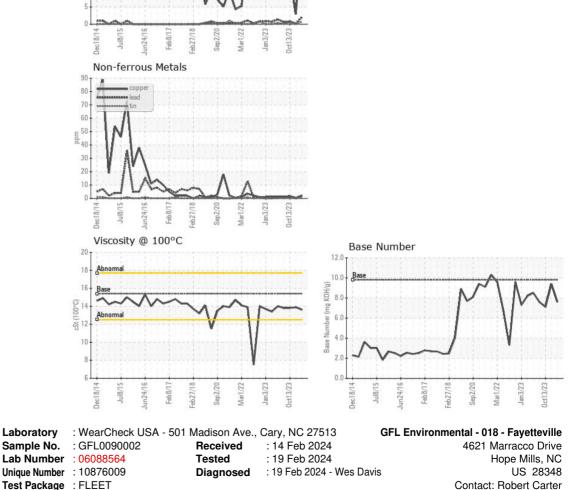



Test Package : FLEET Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. robert.carter@gflenv.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

T: (910)596-1170