




# OIL ANALYSIS REPORT

Sample Rating Trend

VIS DEBRIS



Area  
**(369RBV)**  
Machine Id  
**1015A**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA HYDREX AW 46 (11 GAL)**

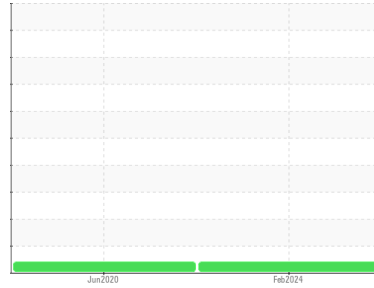

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### Wear

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0065738</b>	GFL0005818	---
Sample Date	Client Info		<b>09 Feb 2024</b>	04 Jun 2020	---
Machine Age	hrs	Client Info	<b>0</b>	4411	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Not Changed</b>	N/A	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>2</b>	8	---
Chromium	ppm	ASTM D5185m >10	<b>0</b>	2	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m >4	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m >15	<b>0</b>	2	---
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	---
Antimony	ppm	ASTM D5185m	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	19	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m 0	<b>1</b>	8	---
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m 0	<b>25</b>	45	---
Calcium	ppm	ASTM D5185m 50	<b>104</b>	180	---
Phosphorus	ppm	ASTM D5185m 330	<b>359</b>	342	---
Zinc	ppm	ASTM D5185m 430	<b>478</b>	475	---
Sulfur	ppm	ASTM D5185m 760	<b>974</b>	711	---

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>1</b>	2	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.70	<b>0.51</b>	0.448	---




# OIL ANALYSIS REPORT

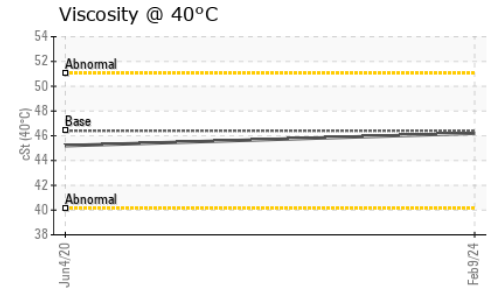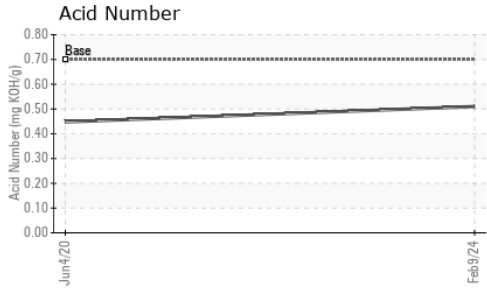





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	▲ MODER	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46.4	<b>46.2</b>	45.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

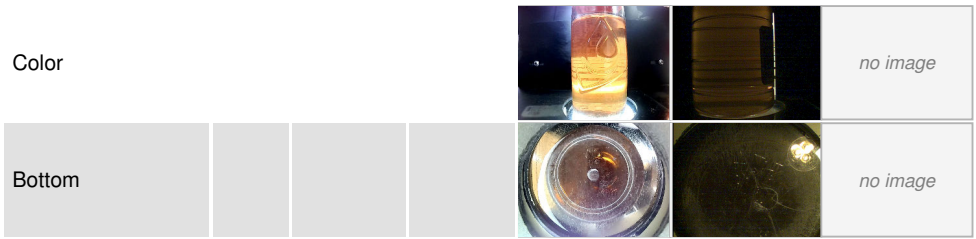

## GRAPHS

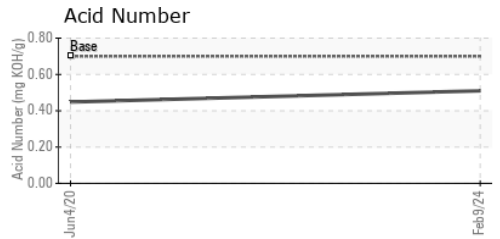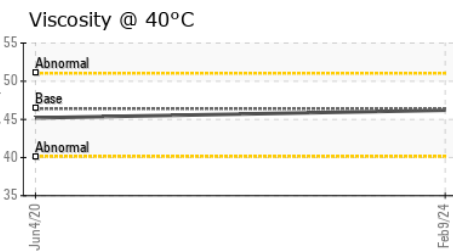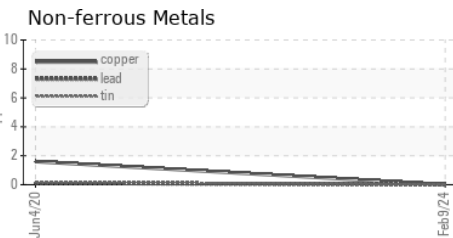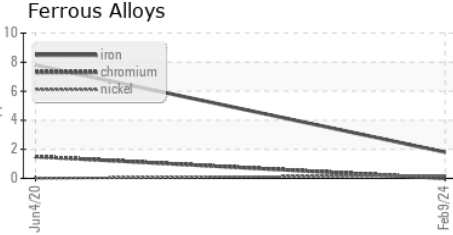

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0065738      **Received** : 14 Feb 2024  
**Lab Number** : 06088718      **Tested** : 15 Feb 2024  
**Unique Number** : 10876163      **Diagnosed** : 15 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: PrtCount )

**GFL Environmental - 823 - Central Missouri Hauling**  
 24461 Oak Grove Lane  
 Sedalia, MO  
 US 65301  
 Contact: Terry Randolph  
 trandolph@gflenv.com  
 T: (660)631-2116  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)