




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**428050-402357**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)**

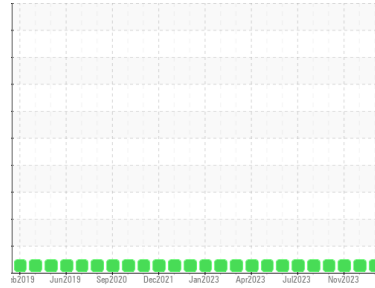

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0074793</b>	GFL0102975	GFL0086399
Sample Date	Client Info		<b>13 Feb 2024</b>	15 Jan 2024	19 Nov 2023
Machine Age	hrs	Client Info	<b>14259</b>	14233	14091
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>13</b>	14	8
Chromium	ppm	ASTM D5185m >20	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m >5	<b>7</b>	6	4
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	4	3
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185m >330	<b>2</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>5</b>	4	4
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>64</b>	66	64
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>967</b>	923	938
Calcium	ppm	ASTM D5185m	<b>1127</b>	1152	1183
Phosphorus	ppm	ASTM D5185m 1360	<b>1021</b>	997	1031
Zinc	ppm	ASTM D5185m 1480	<b>1283</b>	1248	1302
Sulfur	ppm	ASTM D5185m	<b>2871</b>	2741	2944

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	9	8
Sodium	ppm	ASTM D5185m	<b>3</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.5</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.7</b>	8.8	8.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.9</b>	20.1	19.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.5</b>	15.7	15.5
Base Number (BN)	mg KOH/g	ASTM D2896 12.2	<b>6.8</b>	6.7	7.4







# OIL ANALYSIS REPORT

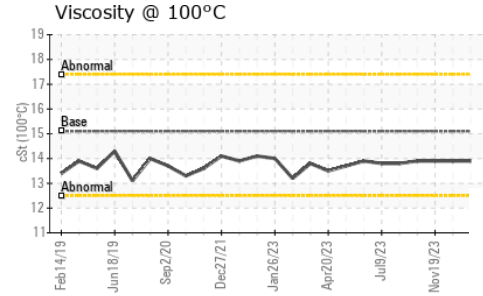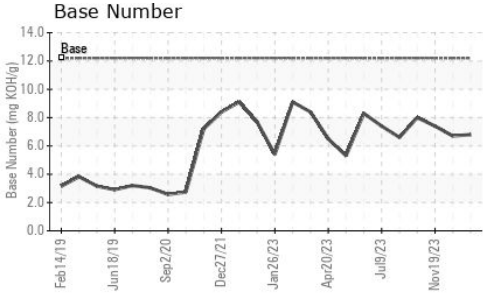

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>13.9</b>	13.9	13.9

## GRAPHS

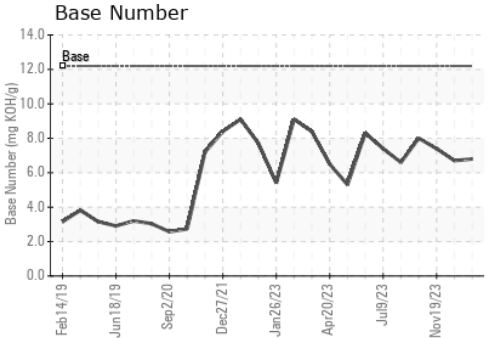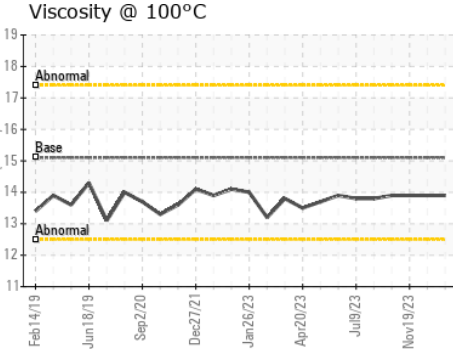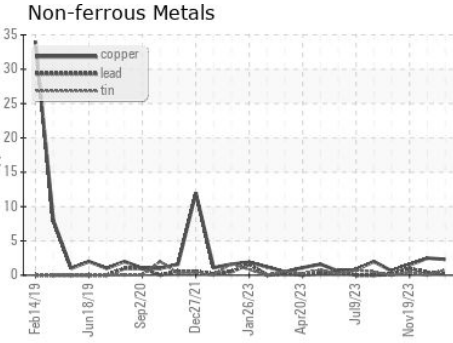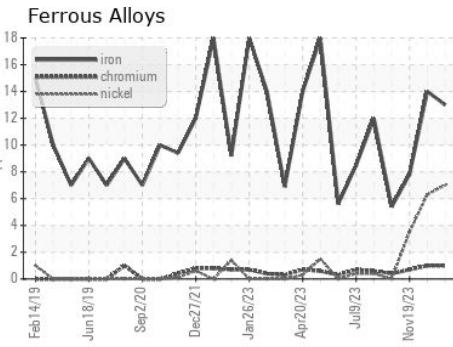

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0074793  
**Lab Number** : **06089302**  
**Unique Number** : 10876747  
**Test Package** : FLEET  
**Received** : 14 Feb 2024  
**Tested** : 15 Feb 2024  
**Diagnosed** : 16 Feb 2024 - Don Baldrige

**GFL Environmental - 816 - WCA of South Arkansas**  
 3083 Smackover Hwy  
 El Dorado, AR  
 US 71730  
 Contact: Mike Howell  
 mike.howell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: