




OIL ANALYSIS REPORT

Sample Rating Trend

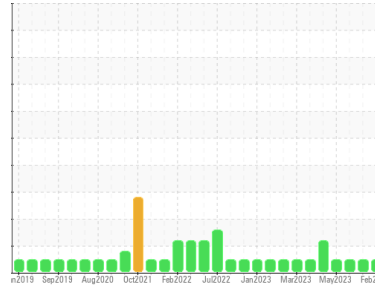

NORMAL



Machine Id
948007-205265

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (28 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0092158	GFL0084643	GFL0084713
Sample Date	Client Info	12 Feb 2024	15 Oct 2023	13 Jun 2023
Machine Age	mls	Client Info	147227	0
Oil Age	mls	Client Info	470	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	14	8	8
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >4	0	<1	<1
Titanium	ppm ASTM D5185m	0	<1	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	2	1	4
Lead	ppm ASTM D5185m >40	<1	<1	1
Copper	ppm ASTM D5185m >330	2	1	0
Tin	ppm ASTM D5185m >15	1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	14	7	9
Barium	ppm ASTM D5185m 0	7	3	0
Molybdenum	ppm ASTM D5185m 60	48	51	50
Manganese	ppm ASTM D5185m 0	3	<1	<1
Magnesium	ppm ASTM D5185m 1010	757	514	580
Calcium	ppm ASTM D5185m 1070	1222	1517	1690
Phosphorus	ppm ASTM D5185m 1150	715	619	722
Zinc	ppm ASTM D5185m 1270	927	830	1004
Sulfur	ppm ASTM D5185m 2060	2463	2049	2992

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	15	5	8
Sodium	ppm ASTM D5185m	3	9	22
Potassium	ppm ASTM D5185m >20	<1	<1	4

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0	0	0.1
Nitration	Abs/cm *ASTM D7624 >20	10.8	10.6	10.1
Sulfation	Abs/.1mm *ASTM D7415 >30	19.9	21.5	21.3

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.3	18.6	19.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	5.8	4.4	4.8







OIL ANALYSIS REPORT

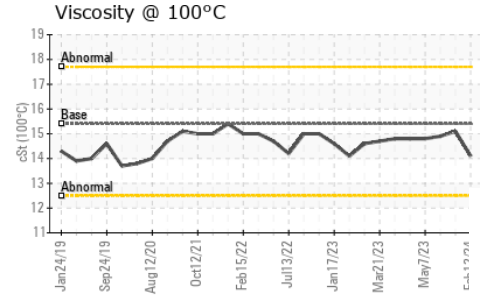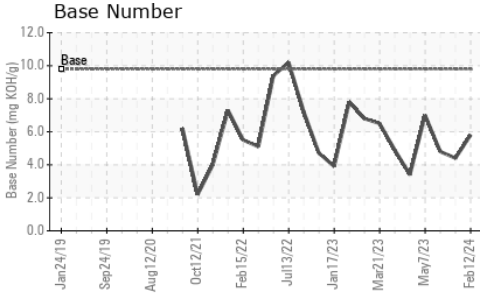

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	15.1	14.9

GRAPHS

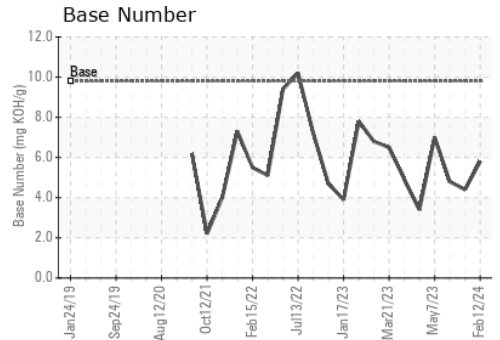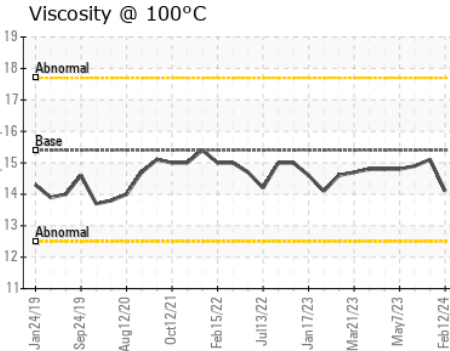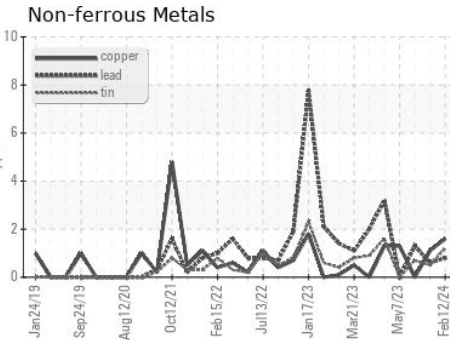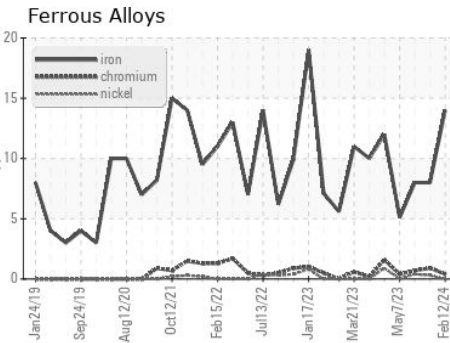

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0092158
 Lab Number : 06089340
 Unique Number : 10876785
 Test Package : FLEET

Received : 14 Feb 2024
 Tested : 15 Feb 2024
 Diagnosed : 15 Feb 2024 - Wes Davis

GFL Environmental - 856 - Houston South
 8515 Highway 6 South
 Houston, TX
 US 77083
 Contact: Jose Gonzalez
 jgonzalez2@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: