




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**834044**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

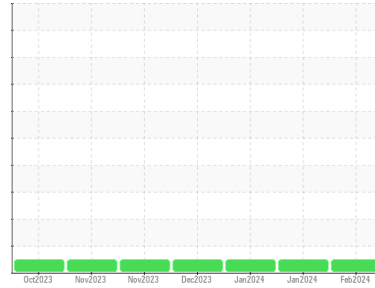

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108122</b>	GFL0102470	GFL0108171
Sample Date	Client Info		<b>07 Feb 2024</b>	31 Jan 2024	08 Jan 2024
Machine Age	hrs	Client Info	<b>1172</b>	12078	979
Oil Age	hrs	Client Info	<b>979</b>	1133	0
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>53</b>	50	48
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>1</b>	2	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	6	4
Lead	ppm	ASTM D5185m >40	<b>4</b>	3	3
Copper	ppm	ASTM D5185m >330	<b>14</b>	13	14
Tin	ppm	ASTM D5185m >15	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>8</b>	11	13
Barium	ppm	ASTM D5185m 5	<b>3</b>	<1	2
Molybdenum	ppm	ASTM D5185m 50	<b>70</b>	71	63
Manganese	ppm	ASTM D5185m 0	<b>12</b>	12	12
Magnesium	ppm	ASTM D5185m 560	<b>891</b>	843	856
Calcium	ppm	ASTM D5185m 1510	<b>1302</b>	1278	1321
Phosphorus	ppm	ASTM D5185m 780	<b>792</b>	804	779
Zinc	ppm	ASTM D5185m 870	<b>1011</b>	1024	987
Sulfur	ppm	ASTM D5185m 2040	<b>2452</b>	2487	2307

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>25</b>	26	27
Sodium	ppm	ASTM D5185m	<b>5</b>	5	5
Potassium	ppm	ASTM D5185m >20	<b>10</b>	11	9

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.3</b>	12.2	12.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.9</b>	25.5	24.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>23.9</b>	23.1	22.5
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>3.3</b>	3.5	3.9







# OIL ANALYSIS REPORT

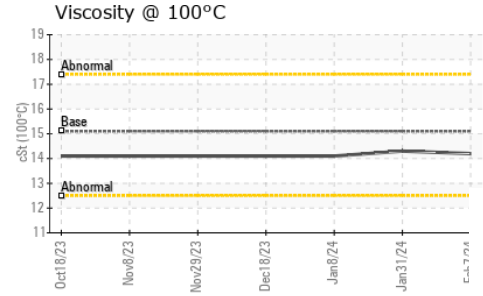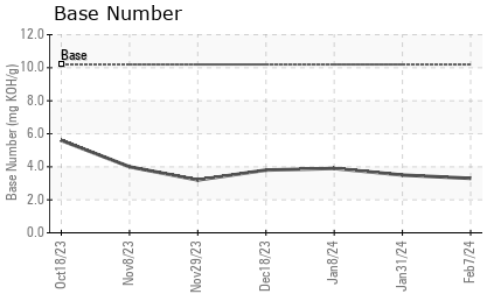

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.2</b>	14.3	14.1

## GRAPHS

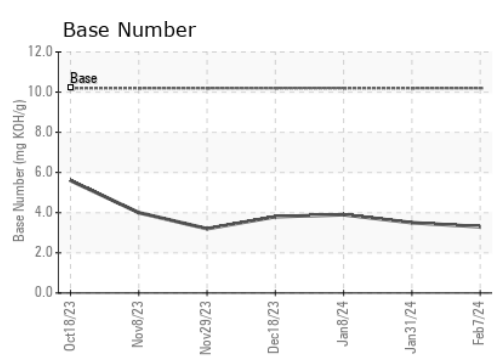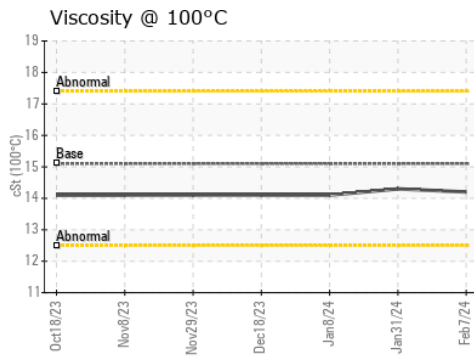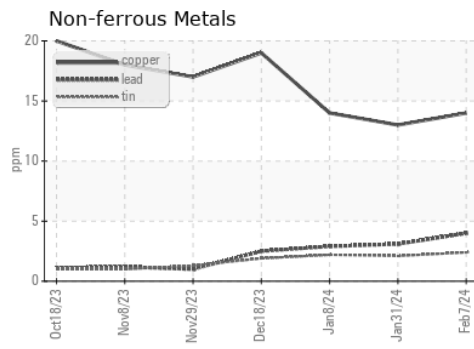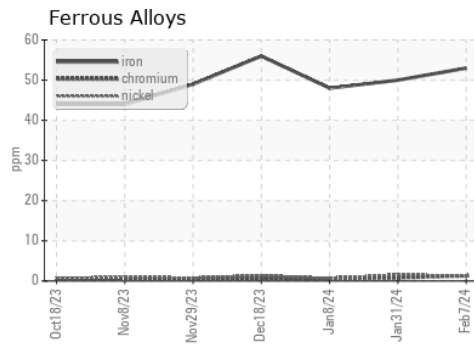

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108122 **Received** : 14 Feb 2024  
**Lab Number** : 06089384 **Tested** : 15 Feb 2024  
**Unique Number** : 10876829 **Diagnosed** : 16 Feb 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: JEREMY BROWN  
 jeremyb@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)