




# OIL ANALYSIS REPORT

Sample Rating Trend

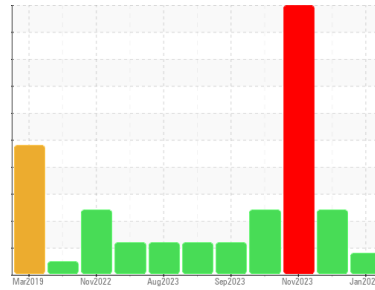

FUEL



Machine Id  
**924022-260240**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0104935</b>	GFL0104924	GFL0088088
Sample Date	Client Info	<b>31 Jan 2024</b>	08 Jan 2024	09 Nov 2023
Machine Age	hrs	<b>13141</b>	12993	12721
Oil Age	hrs	<b>12591</b>	12591	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>MARGINAL</b>	SEVERE	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	0.10

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>10</b>	11	16
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	1	5
Lead	ppm ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	<1	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>25</b>	<1	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>49</b>	58	127
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>773</b>	851	652
Calcium	ppm ASTM D5185m 1070	<b>1127</b>	932	753
Phosphorus	ppm ASTM D5185m 1150	<b>978</b>	905	733
Zinc	ppm ASTM D5185m 1270	<b>1197</b>	1096	880
Sulfur	ppm ASTM D5185m 2060	<b>3120</b>	2744	2271

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	4	8
Sodium	ppm ASTM D5185m	<b>45</b>	63	749
Potassium	ppm ASTM D5185m >20	<b>5</b>	5	55
Fuel	% ASTM D3524 >5	<b>3.4</b>	8.6	20.8

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.3	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>7.1</b>	7.3	10.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.4</b>	20.1	18.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.1</b>	18.3	14.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.9</b>	7.5	9.4







# OIL ANALYSIS REPORT

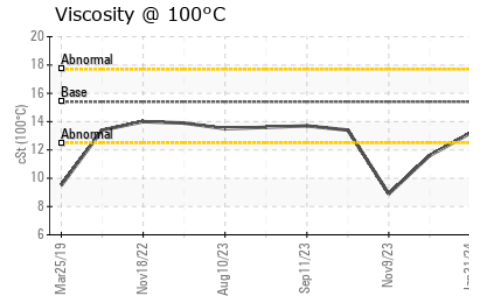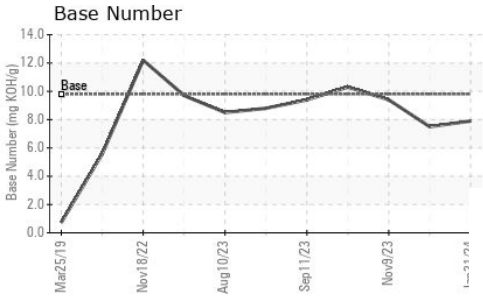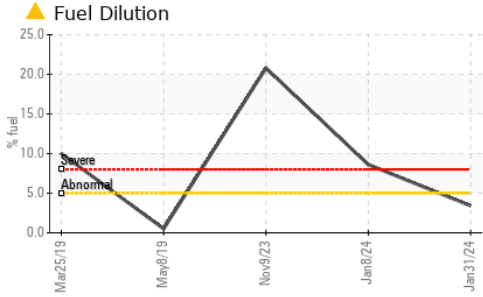

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	▲ 11.6    ● 8.9

## GRAPHS

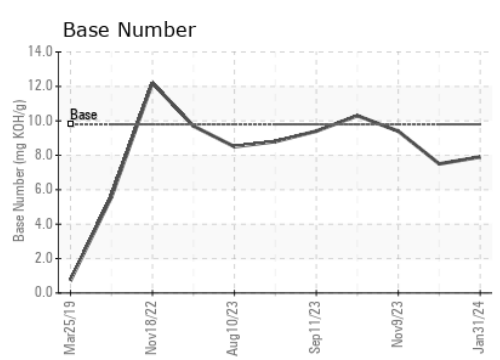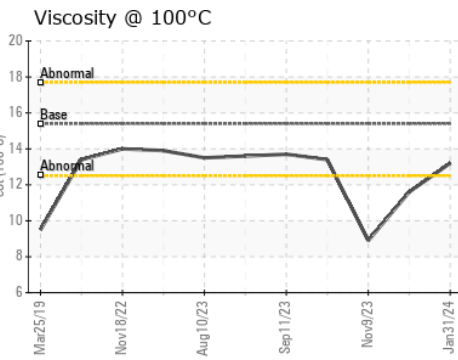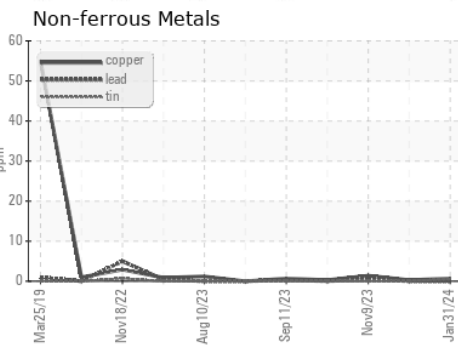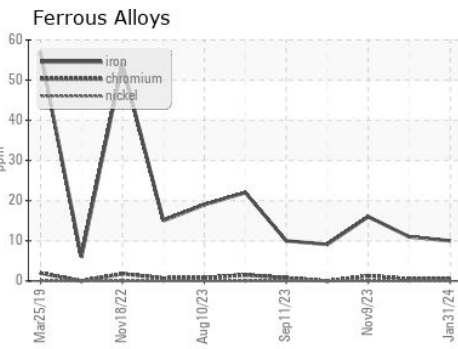

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104935      **Received** : 15 Feb 2024  
**Lab Number** : 06089819      **Tested** : 19 Feb 2024  
**Unique Number** : 10882672      **Diagnosed** : 19 Feb 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 820 - Joplin Hauling**  
 3700 West 7th Street  
 Joplin, MO  
 US 64801  
 Contact: James Jarrett  
 jjarrett@gflenv.com  
 T: (417)310-2802  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)