




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(H916995) {UNASSIGNED}**  
 Machine Id  
**913017**  
 Component  
**Front Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (40 QTS)**

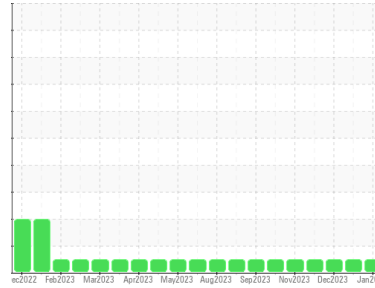

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0098941</b>	GFL0098972	GFL0098996
Sample Date	Client Info	<b>29 Jan 2024</b>	09 Jan 2024	19 Dec 2023
Machine Age	hrs	<b>3761</b>	3623	3458
Oil Age	hrs	<b>3623</b>	2446	2446
Oil Changed	Client Info	<b>N/A</b>	Changed	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>7</b>	20	11
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >5	<b>1</b>	1	1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>1</b>	2	2
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >330	<b>8</b>	2	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>1</b>	0	2
Barium	ppm ASTM D5185m 0	<b>0</b>	3	0
Molybdenum	ppm ASTM D5185m 60	<b>52</b>	56	56
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>887</b>	938	909
Calcium	ppm ASTM D5185m 1070	<b>1170</b>	1032	1007
Phosphorus	ppm ASTM D5185m 1150	<b>1001</b>	968	1026
Zinc	ppm ASTM D5185m 1270	<b>1219</b>	1177	1251
Sulfur	ppm ASTM D5185m 2060	<b>3189</b>	3110	2967

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	3	3
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	0	2
Potassium	ppm ASTM D5185m >20	<b>1</b>	4	3

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.2</b>	0.5	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>6.0</b>	8.7	7.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.7</b>	20.0	19.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.2</b>	15.6	14.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.5</b>	7.0	7.7







# OIL ANALYSIS REPORT

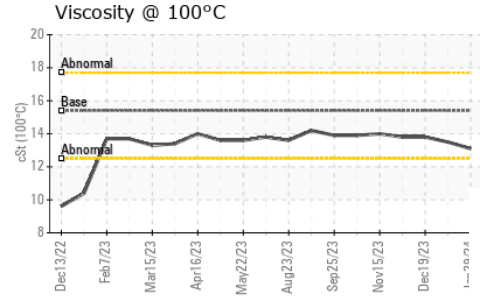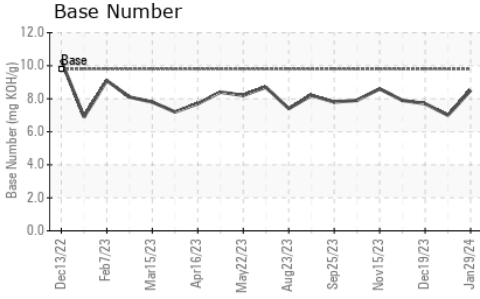

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	13.5

## GRAPHS

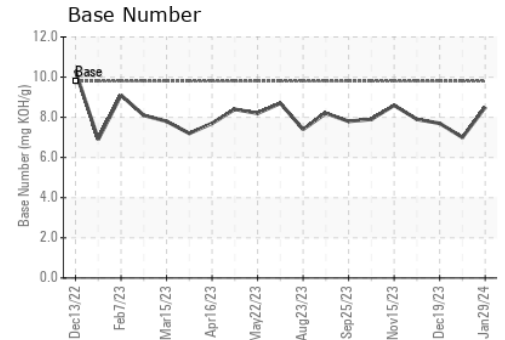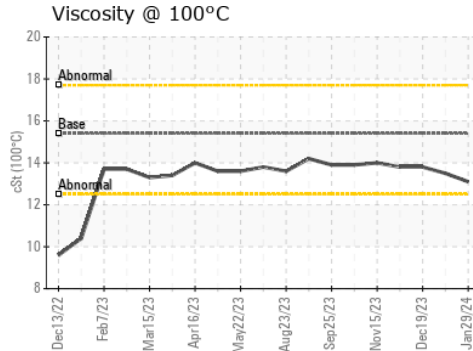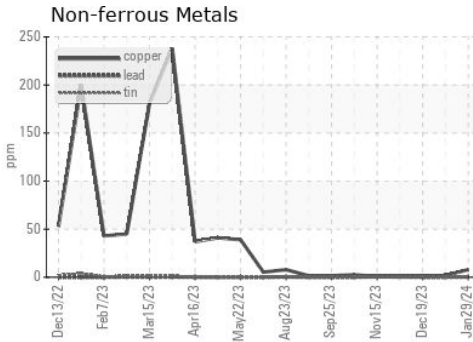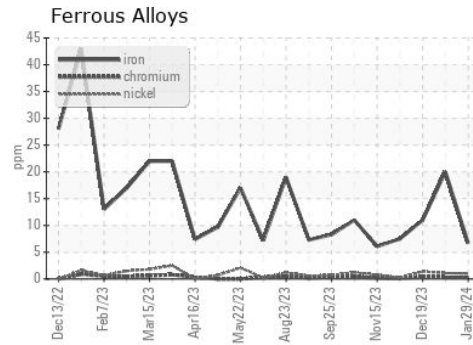

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0098941  
 Lab Number : 06089876  
 Unique Number : 10882729  
 Test Package : FLEET

Received : 15 Feb 2024  
 Tested : 16 Feb 2024  
 Diagnosed : 16 Feb 2024 - Wes Davis

GFL Environmental - 084 - Clarksville  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042

Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com

T: (931)552-7276  
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)