

## **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL



CAT 398 GEN

Natural Gas Engine

PETRO CANADA SENTRON LA 2000 (--- GAL)

Recommendation	
весоттепоаноп	

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.


### **Fluid Condition**


The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


110N EA 2000 (	,			Nov2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0112194		
Sample Date		Client Info		29 Nov 2023		
Machine Age	hrs	Client Info		8579		
Oil Age	hrs	Client Info		2160		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	7		
Chromium	ppm	ASTM D5185m	>4	<1		
Nickel	ppm	ASTM D5185m	>2	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>9	4		
Lead	ppm	ASTM D5185m	>30	9		
Copper	ppm	ASTM D5185m	>35	3		
Tin	ppm	ASTM D5185m	>4	1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	0		
Barium	ppm	ASTM D5185m	1	0		
Molybdenum	ppm	ASTM D5185m	1	0		
Manganese	ppm	ASTM D5185m	5	<1		
Magnesium	ppm	ASTM D5185m	1	9		
Calcium	ppm	ASTM D5185m	1237	1667		
Phosphorus	ppm	ASTM D5185m	270	351		
Zinc	ppm	ASTM D5185m	330	477		
Sulfur	ppm	ASTM D5185m	2670	3300		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	2		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
Fuel	%	ASTM D3524	>4.0	0.7		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.2		
Nitration	Abs/cm	*ASTM D7624	>20	7.6		
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.2		
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.7		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.64	1.28		
Base Number (BN)	mg KOH/g	ASTM D2896	4.4	4.20		
		2				




# **OIL ANALYSIS REPORT**





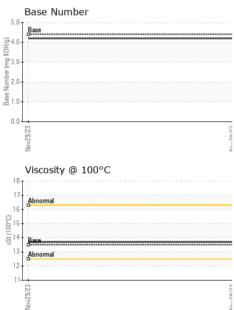

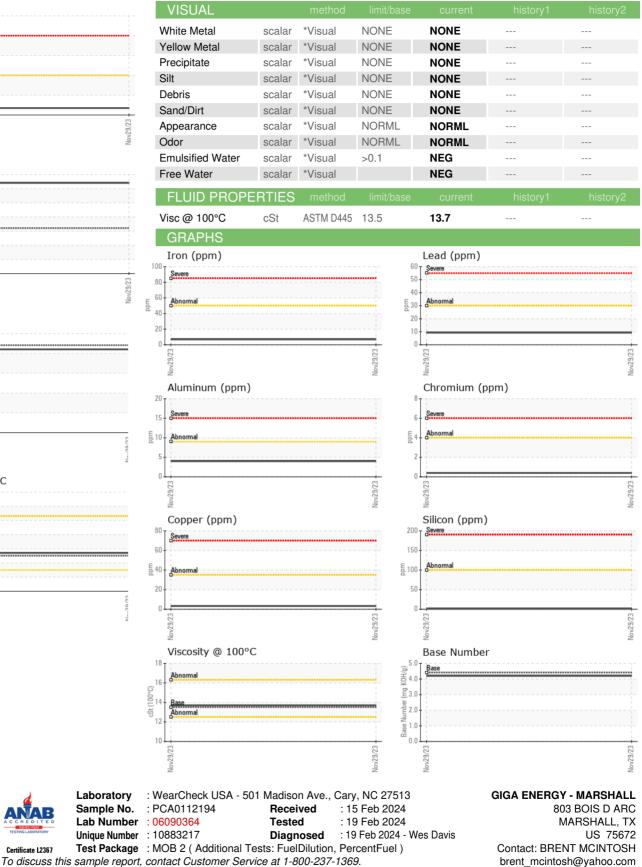

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F:

T: (903)926-9567