




# OIL ANALYSIS REPORT

Sample Rating Trend

GLYCOL



Machine Id  
**729090**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

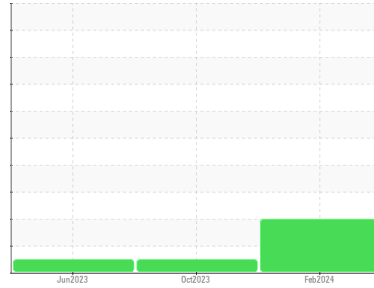

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

The iron level is abnormal. All other component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0097800</b>	GFL0085302	GFL0085319
Sample Date	Client Info	<b>12 Feb 2024</b>	09 Oct 2023	27 Jun 2023
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>▲ 90</b>	34	21
Chromium	ppm ASTM D5185m >5	<b>3</b>	1	<1
Nickel	ppm ASTM D5185m >2	<b>1</b>	<1	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >30	<b>6</b>	6	1
Lead	ppm ASTM D5185m >30	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >150	<b>3</b>	2	2
Tin	ppm ASTM D5185m >5	<b>1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>3</b>	2	5
Barium	ppm ASTM D5185m 0	<b>0</b>	12	<1
Molybdenum	ppm ASTM D5185m 60	<b>64</b>	60	60
Manganese	ppm ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>951</b>	963	989
Calcium	ppm ASTM D5185m 1070	<b>1049</b>	1019	1115
Phosphorus	ppm ASTM D5185m 1150	<b>1002</b>	961	983
Zinc	ppm ASTM D5185m 1270	<b>1186</b>	1213	1251
Sulfur	ppm ASTM D5185m 2060	<b>3245</b>	2728	3468

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>9</b>	8	3
Sodium	ppm ASTM D5185m	<b>▲ 101</b>	17	18
Potassium	ppm ASTM D5185m >20	<b>10</b>	12	5
Glycol	% *ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.1</b>	0.8	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>12.2</b>	10.0	9.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.7</b>	21.7	21.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>21.8</b>	19.4	18.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.6</b>	7.1	8.2







# OIL ANALYSIS REPORT

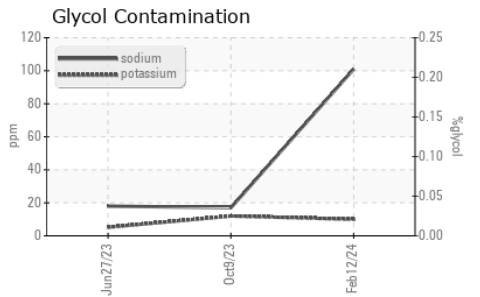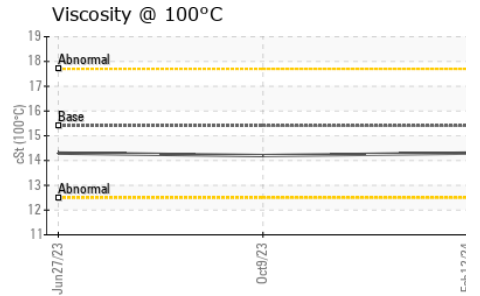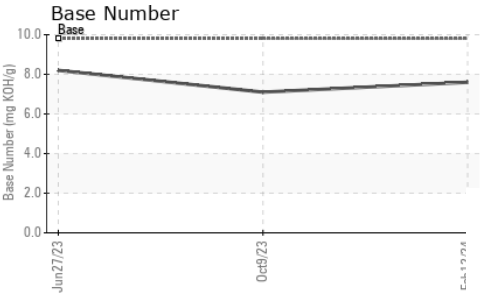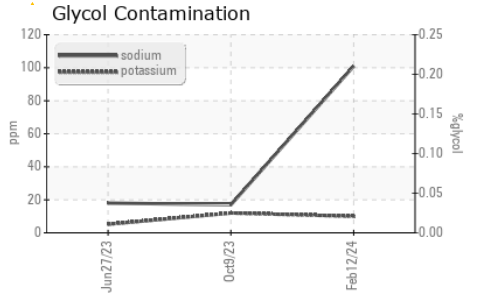

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	14.2

## GRAPHS

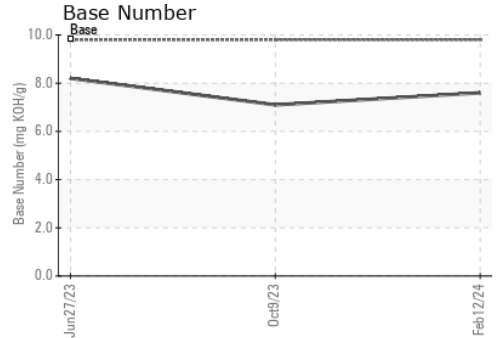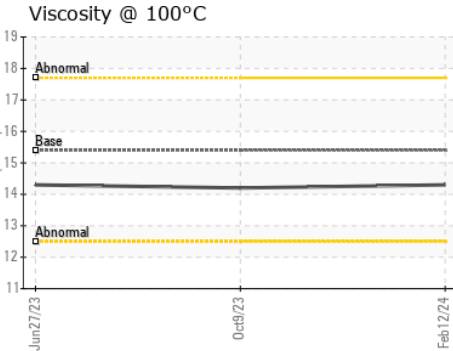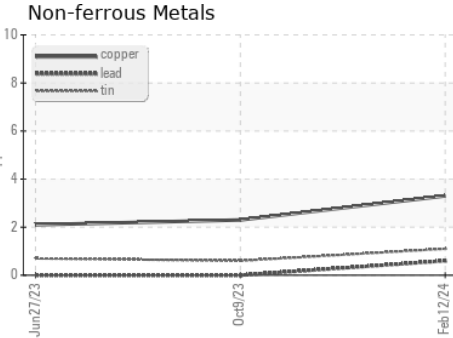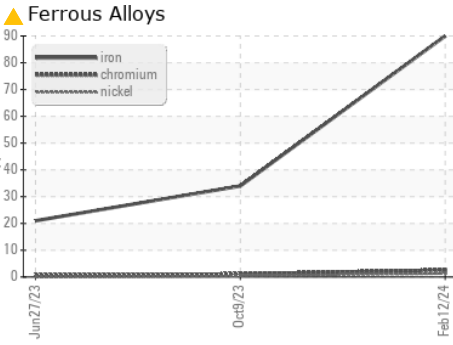

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0097800 **Received** : 15 Feb 2024  
**Lab Number** : 06090740 **Tested** : 19 Feb 2024  
**Unique Number** : 10883593 **Diagnosed** : 19 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 958 - Tri County HC Morton**  
 1090 W. Jefferson St.  
 Morton, IL  
 US 61550  
 Contact: Bryan Link  
 blink@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: