



OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id
814055
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

- Recommendation**
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material.
- Fluid Condition**
The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0078299	---	---
Sample Date	Client Info	12 Feb 2024	---	---
Machine Age	hrs	308	---	---
Oil Age	hrs	0	---	---
Oil Changed	Client Info	Not Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	33	---	---
Chromium	ppm ASTM D5185m >20	2	---	---
Nickel	ppm ASTM D5185m >5	7	---	---
Titanium	ppm ASTM D5185m >2	1	---	---
Silver	ppm ASTM D5185m >2	1	---	---
Aluminum	ppm ASTM D5185m >20	5	---	---
Lead	ppm ASTM D5185m >40	1	---	---
Copper	ppm ASTM D5185m >330	24	---	---
Tin	ppm ASTM D5185m >15	3	---	---
Vanadium	ppm ASTM D5185m	<1	---	---
Cadmium	ppm ASTM D5185m	<1	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	338	---	---
Barium	ppm ASTM D5185m 0	0	---	---
Molybdenum	ppm ASTM D5185m 60	124	---	---
Manganese	ppm ASTM D5185m 0	7	---	---
Magnesium	ppm ASTM D5185m 1010	661	---	---
Calcium	ppm ASTM D5185m 1070	1415	---	---
Phosphorus	ppm ASTM D5185m 1150	726	---	---
Zinc	ppm ASTM D5185m 1270	812	---	---
Sulfur	ppm ASTM D5185m 2060	2817	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 81	---	---
Sodium	ppm ASTM D5185m	0	---	---
Potassium	ppm ASTM D5185m >20	20	---	---
Fuel	% ASTM D3524 >3.0	0.3	---	---

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.3	---	---
Nitration	Abs/cm *ASTM D7624 >20	8.5	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	25.4	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	21.4	---	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.4	---	---







OIL ANALYSIS REPORT

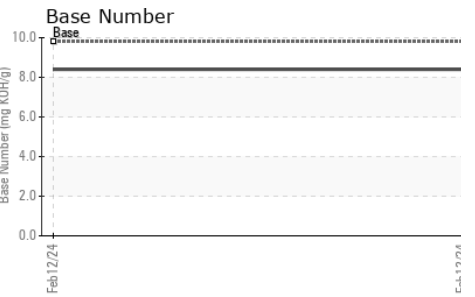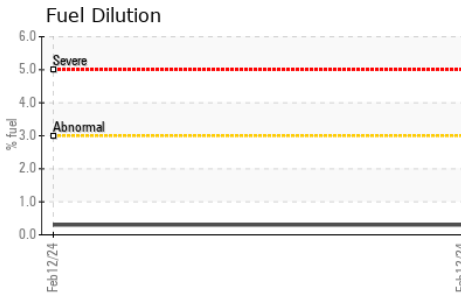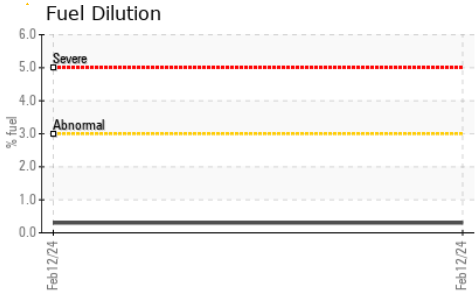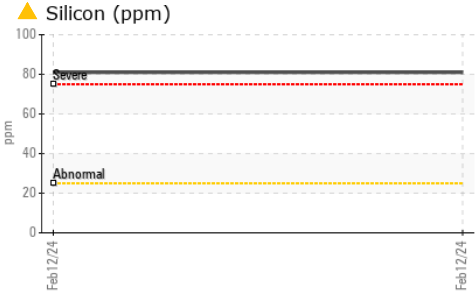

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 9.8	---

GRAPHS

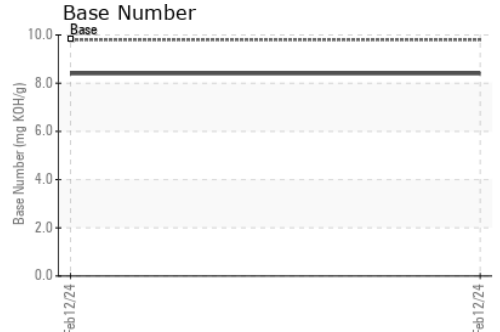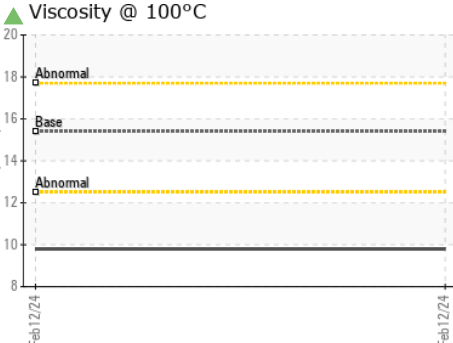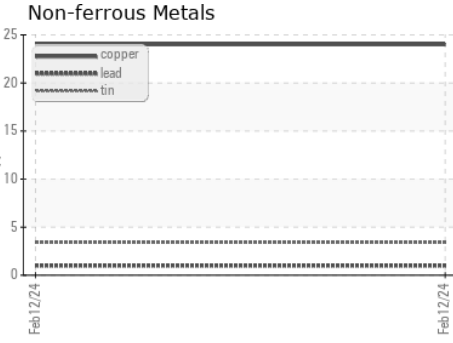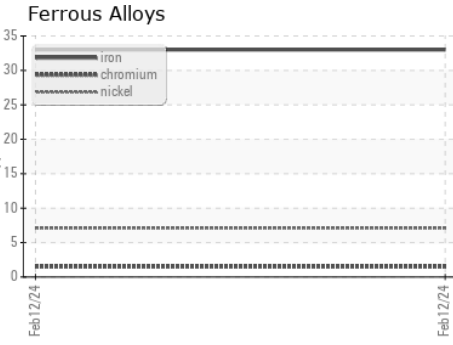

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0078299

Lab Number : 06090753

Unique Number : 10883606

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 15 Feb 2024

Tested : 19 Feb 2024

Diagnosed : 19 Feb 2024 - Don Baldrige

GFL Environmental - 846 - Mayfield Hauling

3426 State Route 45

Mayfield, KY

US 42066

Contact: Jack Lindsey

jack.lindsey@gflenv.com

T: (270)970-3690

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)