



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**812031**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

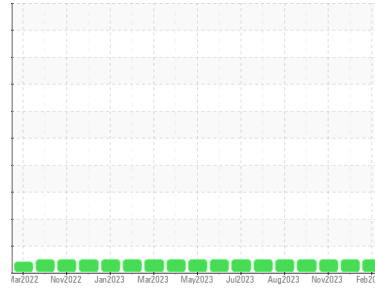

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0078297</b>	GFL0099271	GFL0080032
Sample Date	Client Info	<b>12 Feb 2024</b>	24 Jan 2024	09 Nov 2023
Machine Age	hrs	<b>5029</b>	4924	4493
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>28</b>	25	11
Chromium	ppm ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>13</b>	13	9
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>2</b>	<1	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>6</b>	<1	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>63</b>	53	62
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>959</b>	1032	939
Calcium	ppm ASTM D5185m 1070	<b>1088</b>	1059	1069
Phosphorus	ppm ASTM D5185m 1150	<b>1049</b>	1014	1014
Zinc	ppm ASTM D5185m 1270	<b>1224</b>	1224	1222
Sulfur	ppm ASTM D5185m 2060	<b>3352</b>	2677	2848

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	4	3
Sodium	ppm ASTM D5185m	<b>7</b>	6	2
Potassium	ppm ASTM D5185m >20	<b>23</b>	20	17

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.5	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>10.1</b>	10.3	8.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.7</b>	22.7	20.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.1</b>	20.6	17.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.5</b>	6.3	7.8







# OIL ANALYSIS REPORT

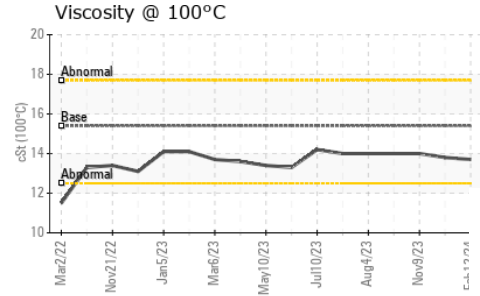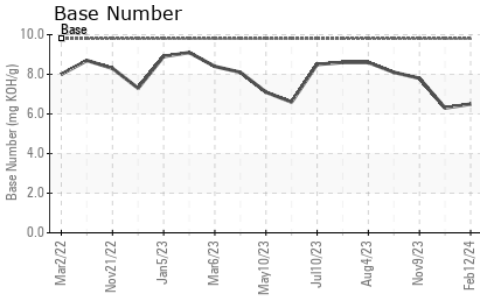

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.8

## GRAPHS

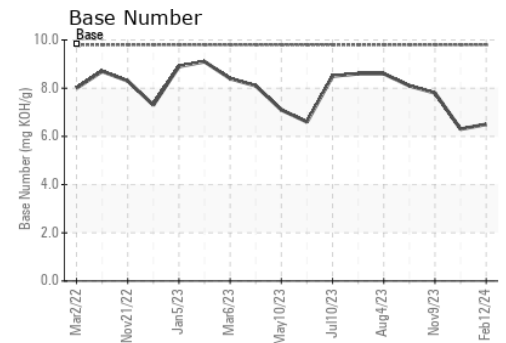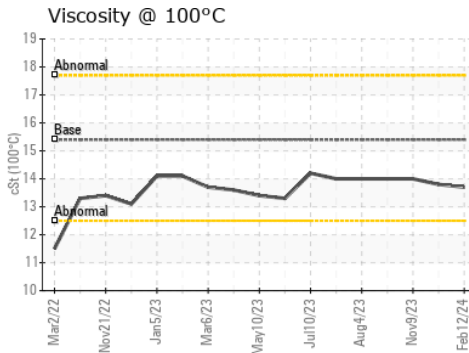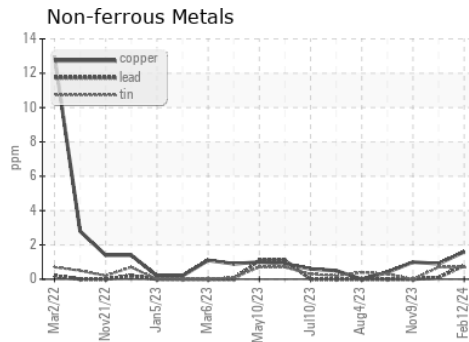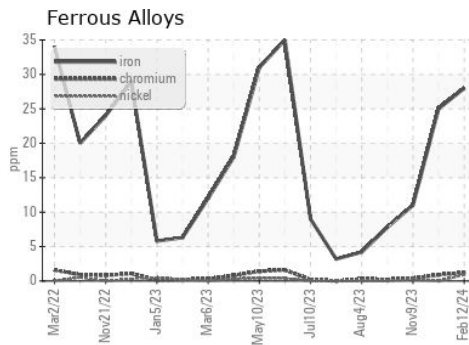

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0078297  
 Lab Number : 06090755  
 Unique Number : 10883608  
 Test Package : FLEET

Received : 15 Feb 2024  
 Tested : 19 Feb 2024  
 Diagnosed : 19 Feb 2024 - Wes Davis

GFL Environmental - 844 - Princeton Hauling  
 10129 Highway 62 West  
 Princeton, KY  
 US 42445

Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com

T: (931)237-6045

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)