



# OIL ANALYSIS REPORT


Sample Rating Trend

COOL CHEMICALS

Area  
**(P659749)**  
Machine Id  
**10899C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (11 GAL)**

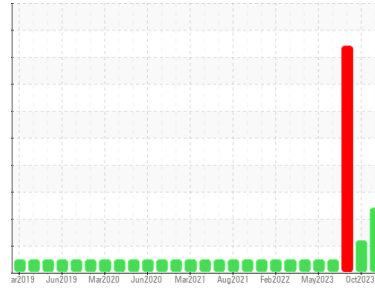

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

### ▲ Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0110374</b>	GFL0050905	GFL0050893	
Sample Date	Client Info	<b>13 Feb 2024</b>	20 Oct 2023	27 Sep 2023	
Machine Age	hrs	Client Info	<b>13305</b>	12472	12308
Oil Age	hrs	Client Info	<b>12308</b>	164	803
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed	
Sample Status		<b>ABNORMAL</b>	ATTENTION	SEVERE	

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	<b>15</b>	7	15
Chromium	ppm ASTM D5185m >4	<b>2</b>	<1	1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >9	<b>1</b>	2	3
Lead	ppm ASTM D5185m >30	<b>1</b>	<1	2
Copper	ppm ASTM D5185m >35	<b>1</b>	<1	4
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	0	2
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	<b>7</b>	30	15
Barium	ppm ASTM D5185m 5	<b>0</b>	3	0
Molybdenum	ppm ASTM D5185m 50	<b>66</b>	61	158
Manganese	ppm ASTM D5185m 0	<b>1</b>	0	<1
Magnesium	ppm ASTM D5185m 560	<b>600</b>	567	556
Calcium	ppm ASTM D5185m 1510	<b>1457</b>	1392	1352
Phosphorus	ppm ASTM D5185m 780	<b>754</b>	759	733
Zinc	ppm ASTM D5185m 870	<b>985</b>	960	879
Sulfur	ppm ASTM D5185m 2040	<b>2707</b>	2793	2292

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	<b>8</b>	6	19
Sodium	ppm ASTM D5185m	<b>32</b>	27	▲ 462
Potassium	ppm ASTM D5185m >20	▲ <b>56</b>	▲ 45	▲ 608
Glycol	% *ASTM D2982	---	---	🔴 0.10

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0</b>	0	0
Nitration	Abs/cm *ASTM D7624 >20	<b>11.0</b>	7.3	9.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.5</b>	18.3	19.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.4</b>	15.1	15.8
Base Number (BN)	mg KOH/g ASTM D2896 10.2	▲ <b>3.5</b>	7.8	8.9







# OIL ANALYSIS REPORT

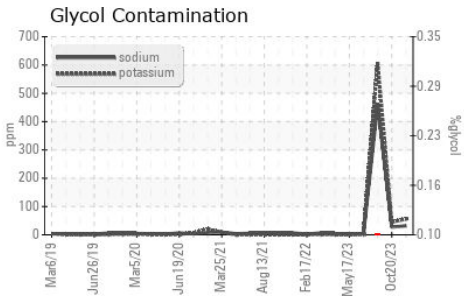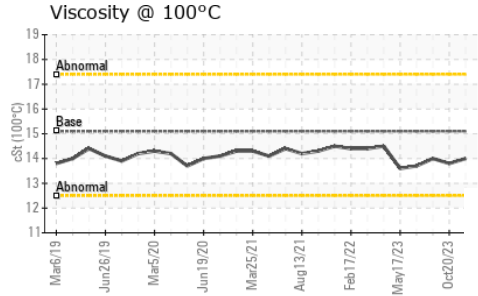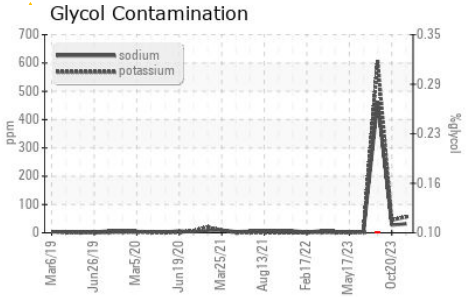

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.0	13.8

## GRAPHS

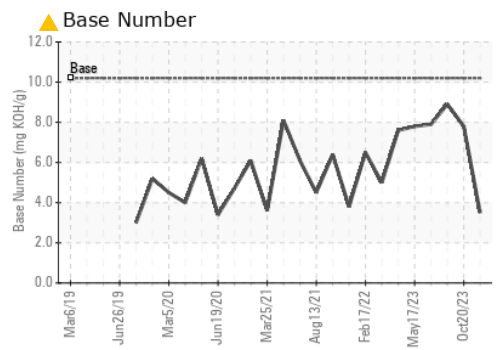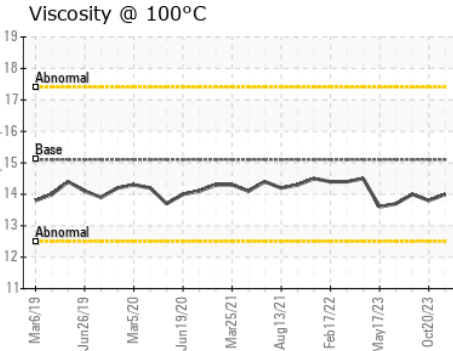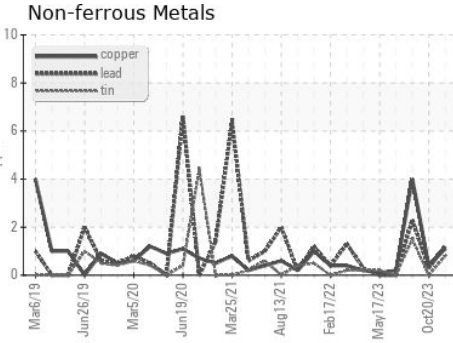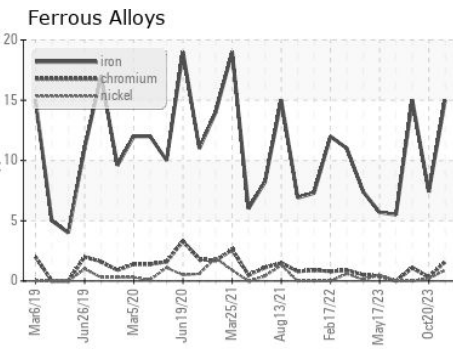

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110374 **Received** : 15 Feb 2024  
**Lab Number** : 06090768 **Tested** : 19 Feb 2024  
**Unique Number** : 10883621 **Diagnosed** : 19 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 031 - Greenville/Spartanburg**  
 1635 Antioch Church Rd  
 Piedmont, SC  
 US 29673  
 Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)