

# OIL ANALYSIS REPORT

Sample Rating Trend



**FUEL**



Machine Id  
**878**  
 Component  
**Diesel Engine**  
 Fluid  
**STP 5W30 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0114422</b>	---	---
Sample Date	Client Info		<b>31 Jan 2024</b>	---	---
Machine Age	mls	Client Info	<b>122579</b>	---	---
Oil Age	mls	Client Info	<b>5000</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>5</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>1</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>70</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>69</b>	---	---
Manganese	ppm	ASTM D5185m	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>482</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1076</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>606</b>	---	---
Zinc	ppm	ASTM D5185m	<b>725</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>2837</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>16</b>	---	---
Sodium	ppm	ASTM D5185m	<b>0</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---
Fuel	%	ASTM D3524 >5	<b>▲ 5.3</b>	---	---




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.8</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.6</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.4</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>3.8</b>	---	---





# OIL ANALYSIS REPORT

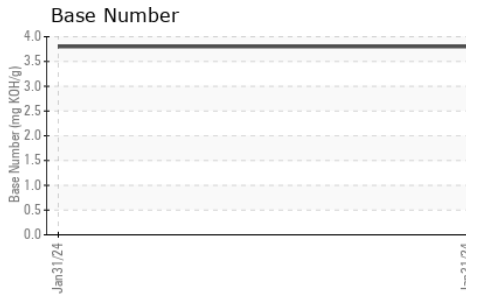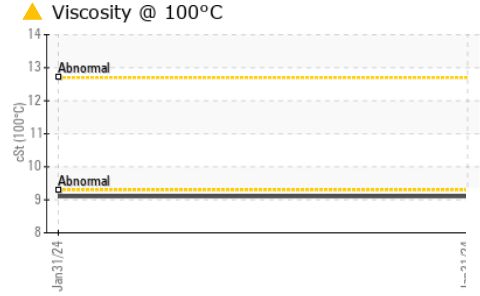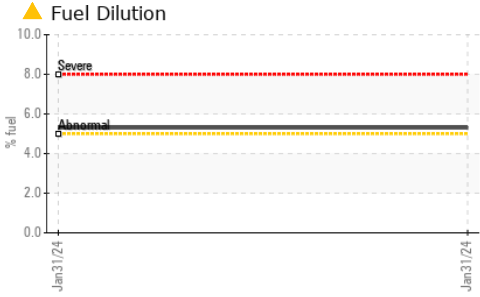

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 9.1	---	---

## GRAPHS

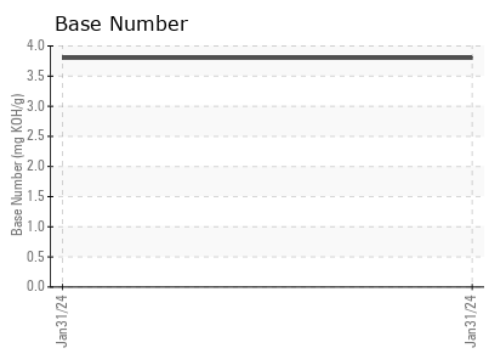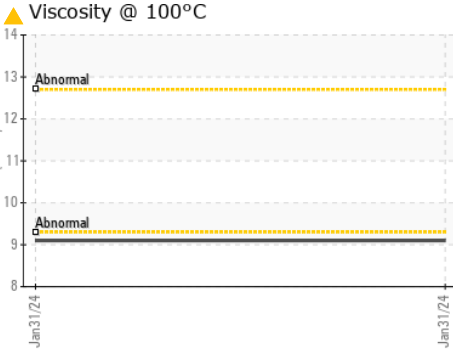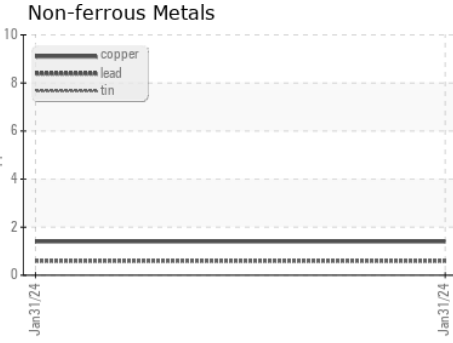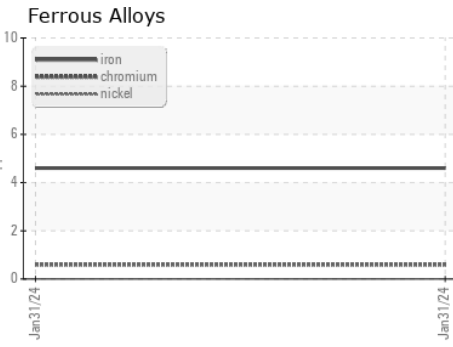

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : PCA0114422 Received : 15 Feb 2024  
 Lab Number : 06090828 Tested : 19 Feb 2024  
 Unique Number : 10883681 Diagnosed : 19 Feb 2024 - Wes Davis  
 Test Package : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GAS FIELD SPECIALISTS**  
 114 PA-660  
 MANSFIELD, PA  
 US 16933  
 Contact: TARA MUIRHEAD  
 tara.muirhead@gfsinc.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: