


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

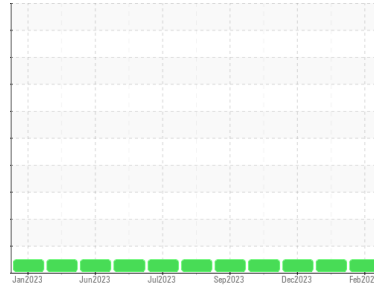

Area  
**(TEMP) Walgreens - Yard Horse**  
 Machine Id  
**[Walgreens - Yard Horse] 136A81259**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0105938</b>	PCA0105873	PCA0105908
Sample Date	Client Info	<b>12 Feb 2024</b>	05 Jan 2024	04 Dec 2023
Machine Age	hrs Client Info	<b>5481</b>	5156	5156
Oil Age	hrs Client Info	<b>200</b>	200	200
Oil Changed	Client Info	<b>Oil Added</b>	Oil Added	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>11</b>	4	35
Chromium	ppm ASTM D5185m >20	<b>1</b>	<1	2
Nickel	ppm ASTM D5185m >4	<b>2</b>	0	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>1</b>	1	5
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >330	<b>1</b>	<1	2
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>1</b>	0	1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm ASTM D5185m 50	<b>56</b>	52	62
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	1
Magnesium	ppm ASTM D5185m 950	<b>882</b>	948	957
Calcium	ppm ASTM D5185m 1050	<b>991</b>	960	1066
Phosphorus	ppm ASTM D5185m 995	<b>991</b>	1025	1076
Zinc	ppm ASTM D5185m 1180	<b>1140</b>	1231	1301
Sulfur	ppm ASTM D5185m 2600	<b>3434</b>	3098	2894

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	2	9
Sodium	ppm ASTM D5185m	<b>0</b>	1	4
Potassium	ppm ASTM D5185m >20	<b>2</b>	1	0



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.3	1.3
Nitration	Abs/cm *ASTM D7624 >20	<b>7.9</b>	6.5	12.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.7</b>	17.8	24.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.0</b>	14.0	22.2
Base Number (BN)	mg KOH/g ASTM D2896	<b>7.8</b>	8.4	5.2





# OIL ANALYSIS REPORT

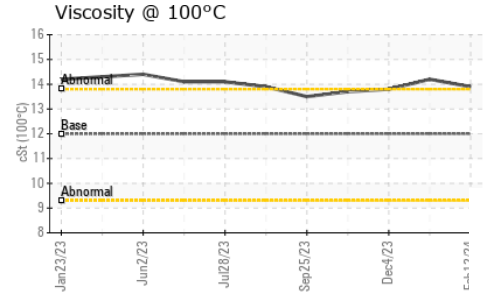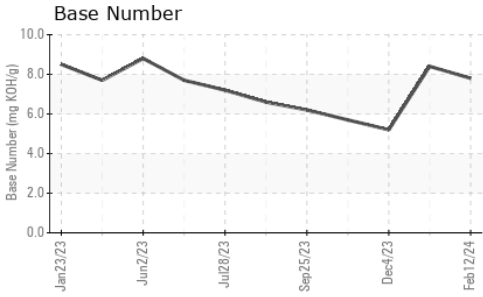

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>13.9</b>	14.2	13.8

## GRAPHS

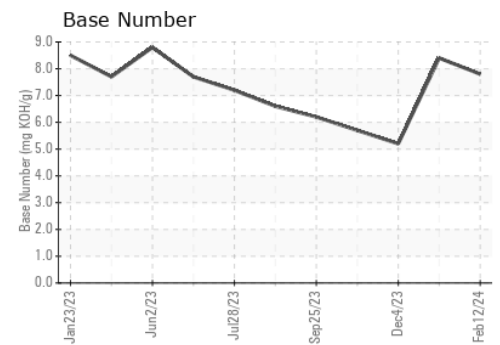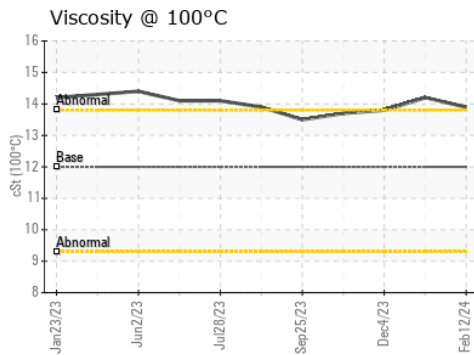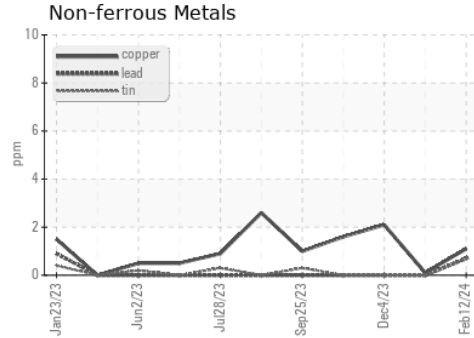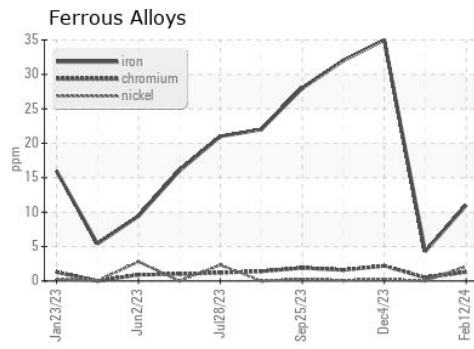

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105938  
**Lab Number** : 06090880  
**Unique Number** : 10883733  
**Test Package** : FLEET

**Received** : 15 Feb 2024  
**Tested** : 19 Feb 2024  
**Diagnosed** : 19 Feb 2024 - Don Baldrige

**Transervice - Shop 1361 - Berkeley-Windsor**  
 4400 State Road 19  
 Windsor, WI  
 US 53598  
 Contact: Mike Hurda  
 mhurda@transervice.com  
 T: (608)846-2726  
 F: (608)846-0389

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)