


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

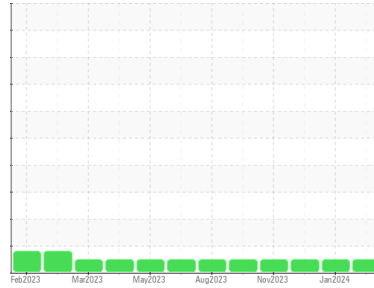

Area  
**(TEMP) Walgreens - Yard Horse**  
 Machine Id  
**[Walgreens - Yard Horse] 136A81258**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0105936</b>	PCA0105872	PCA0105924
Sample Date	Client Info			<b>08 Feb 2024</b>	08 Jan 2024	07 Dec 2023
Machine Age	hrs	Client Info		<b>5550</b>	5550	5373
Oil Age	hrs	Client Info		<b>200</b>	200	211
Oil Changed	Client Info			<b>Oil Added</b>	Oil Added	Oil Added
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>24</b>	14	18
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>1</b>	<1	2
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	3	3
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>1</b>	0	2
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>54</b>	52	59
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	950	<b>844</b>	923	1106
Calcium	ppm	ASTM D5185m	1050	<b>975</b>	944	1150
Phosphorus	ppm	ASTM D5185m	995	<b>972</b>	990	1191
Zinc	ppm	ASTM D5185m	1180	<b>1094</b>	1206	1462
Sulfur	ppm	ASTM D5185m	2600	<b>3426</b>	2987	3594

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	3	4
Sodium	ppm	ASTM D5185m		<b>0</b>	1	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	8.4	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	18.3	18.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.1</b>	15.0	14.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.2</b>	7.9	8.1





# OIL ANALYSIS REPORT

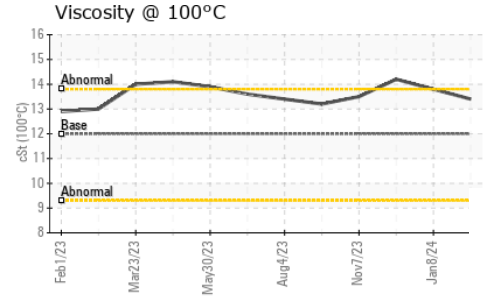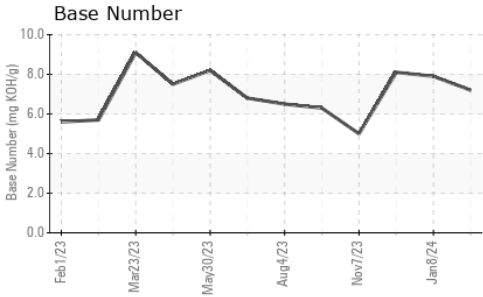

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>13.4</b>	13.8	14.2

## GRAPHS

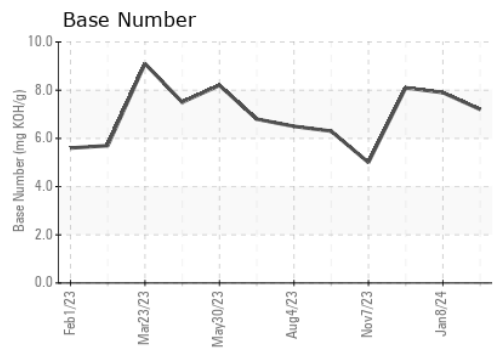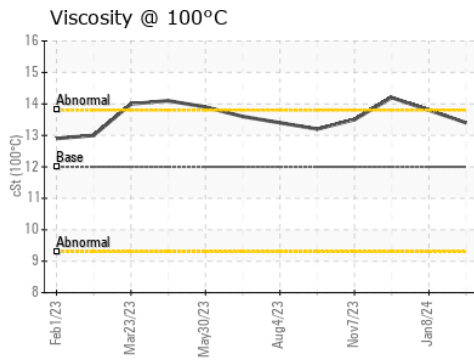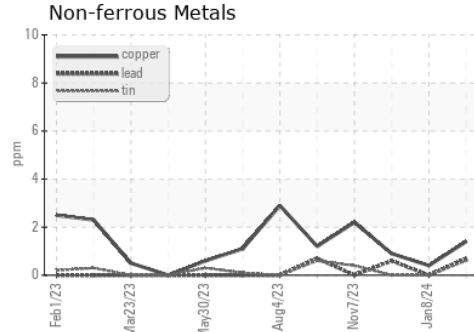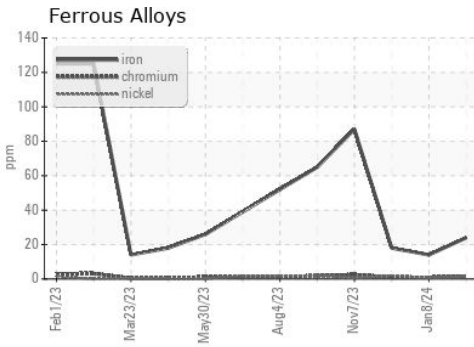

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105936      **Received** : 15 Feb 2024  
**Lab Number** : **06090882**      **Tested** : 19 Feb 2024  
**Unique Number** : 10883735      **Diagnosed** : 19 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1361 - Berkeley-Windsor**  
 4400 State Road 19  
 Windsor, WI  
 US 53598  
 Contact: Mike Hurda  
 mhurda@transervice.com  
 T: (608)846-2726  
 F: (608)846-0389

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)