



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
414063

Component
Diesel Engine
Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

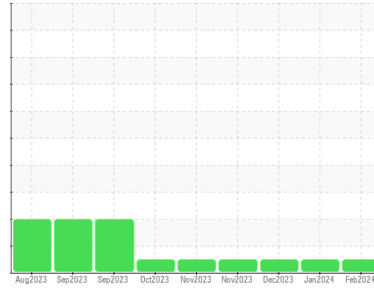

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0103448	GFL0025060	GFL0098450
Sample Date	Client Info	06 Feb 2024	18 Jan 2024	26 Dec 2023
Machine Age	hrs	1360	1205	1070
Oil Age	hrs	1360	1205	1070
Oil Changed	Client Info	N/A	Not Changd	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	6	3	12
Chromium	ppm ASTM D5185m >20	<1	0	<1
Nickel	ppm ASTM D5185m >5	<1	0	1
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	<1	0	<1
Aluminum	ppm ASTM D5185m >20	3	1	6
Lead	ppm ASTM D5185m >40	<1	0	0
Copper	ppm ASTM D5185m >330	19	<1	98
Tin	ppm ASTM D5185m >15	<1	<1	1
Vanadium	ppm ASTM D5185m	0	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	29	44	61
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	71	73	74
Manganese	ppm ASTM D5185m	<1	0	1
Magnesium	ppm ASTM D5185m 450	828	872	840
Calcium	ppm ASTM D5185m 3000	1041	1094	1123
Phosphorus	ppm ASTM D5185m 1150	904	979	940
Zinc	ppm ASTM D5185m 1350	1142	1154	1138
Sulfur	ppm ASTM D5185m 4250	2766	3058	2695

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	5	4	10
Sodium	ppm ASTM D5185m >158	3	2	4
Potassium	ppm ASTM D5185m >20	4	<1	11

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.2	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	6.3	5.7	7.4
Sulfation	Abs/.1mm *ASTM D7415 >30	18.9	18.5	20.9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.2	13.6	16.3
Base Number (BN)	mg KOH/g ASTM D2896 8.5	8.1	8.4	7.8







OIL ANALYSIS REPORT

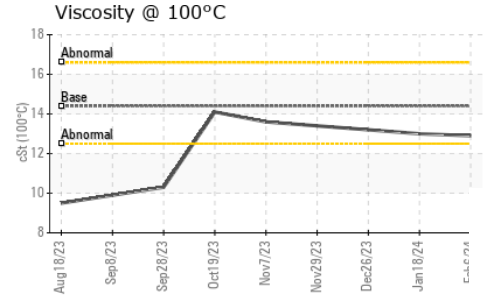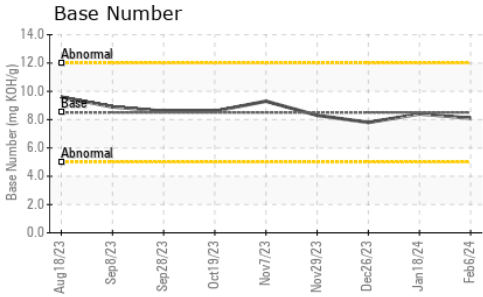

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.9	13.0	13.2

GRAPHS

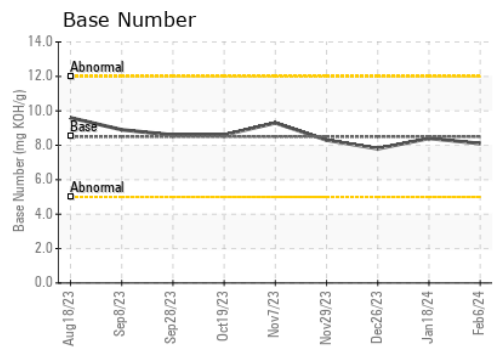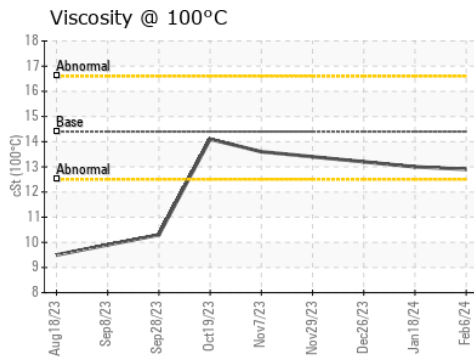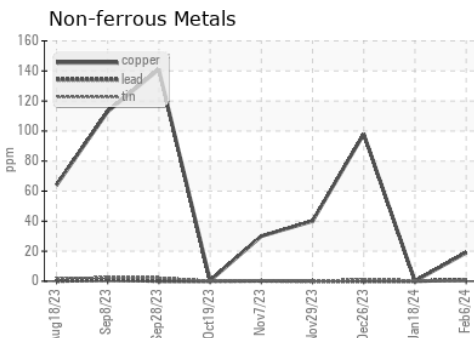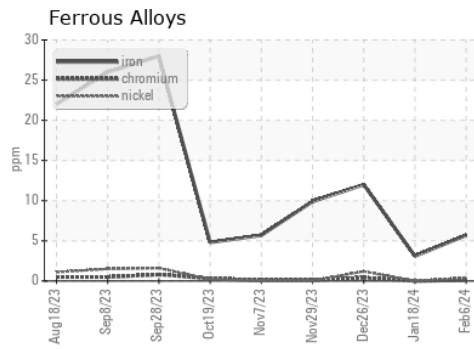

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0103448 **Received** : 16 Feb 2024
Lab Number : 06091452 **Tested** : 16 Feb 2024
Unique Number : 10884305 **Diagnosed** : 16 Feb 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 180 - Tuscaloosa Hauling
 4701 12TH ST NE
 Tuscaloosa, AL
 US 35404
 Contact: FREDERICK ROGERS
 fred.rogers@gflenv.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)