




# OIL ANALYSIS REPORT

Sample Rating Trend

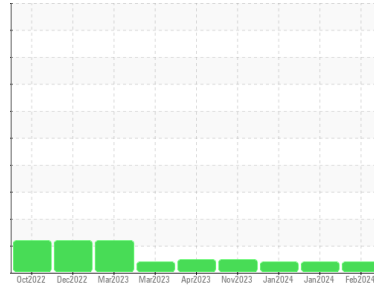

## VISCOSITY



Machine Id  
**225069-23**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0110568</b>	GFL0100269	GFL0100221
Sample Date	Client Info		<b>13 Feb 2024</b>	31 Jan 2024	10 Jan 2024
Machine Age	mls	Client Info	<b>227647</b>	227598	8368
Oil Age	mls	Client Info	<b>0</b>	0	200
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>ATTENTION</b>	ATTENTION	ATTENTION

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	1.1
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>14</b>	14	56
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	2	4
Lead	ppm	ASTM D5185m >40	<b>1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>1</b>	1	36
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>17</b>	19	59
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	68	41
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	6
Magnesium	ppm	ASTM D5185m 1010	<b>915</b>	970	528
Calcium	ppm	ASTM D5185m 1070	<b>1007</b>	1002	1437
Phosphorus	ppm	ASTM D5185m 1150	<b>1010</b>	1101	772
Zinc	ppm	ASTM D5185m 1270	<b>1217</b>	1275	895
Sulfur	ppm	ASTM D5185m 2060	<b>3052</b>	3116	2415

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	23
Sodium	ppm	ASTM D5185m	<b>5</b>	3	6
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	5

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.3</b>	7.0	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.8</b>	17.7	21.5


### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.4</b>	14.2	20.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.0</b>	9.0	9.9




# OIL ANALYSIS REPORT

▲ Viscosity @ 100°C

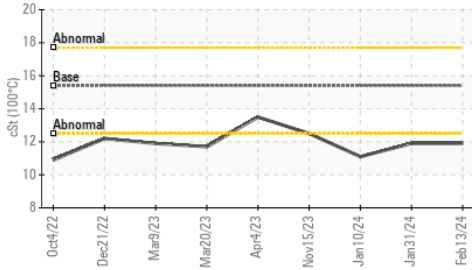

Base Number

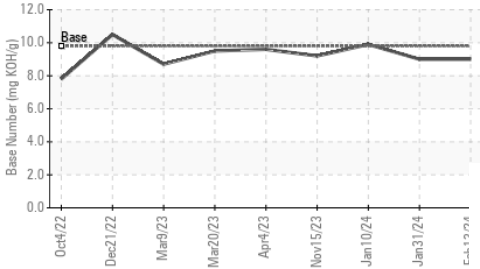


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.9	▲ 11.9	▲ 11.1

## GRAPHS


Ferrous Alloys

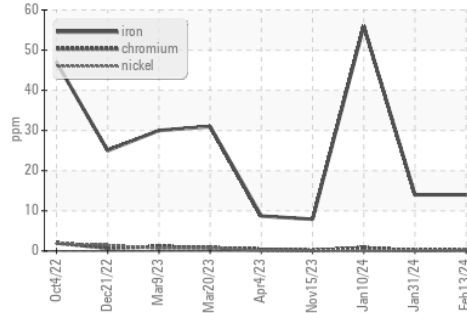


Non-ferrous Metals

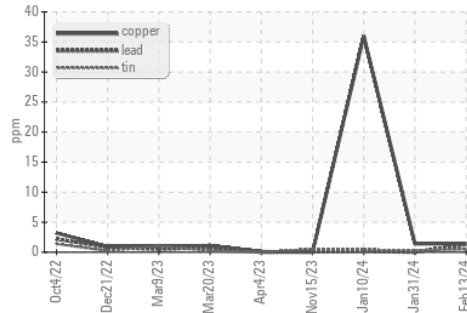

▲ Viscosity @ 100°C

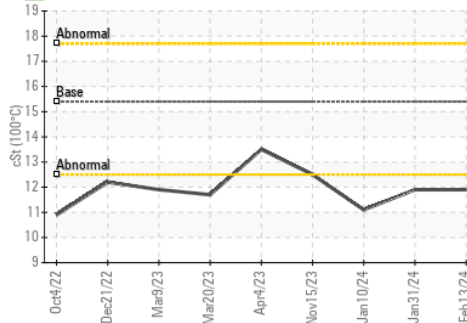

Base Number

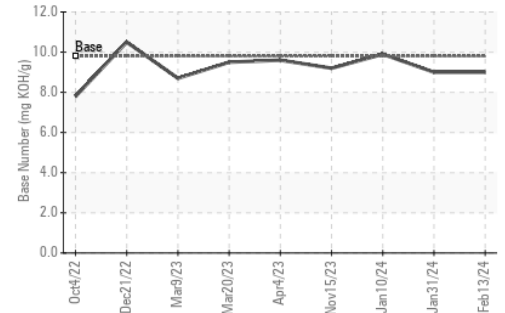

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110568  
**Lab Number** : 06091465  
**Unique Number** : 10884318  
**Test Package** : FLEET

**Received** : 16 Feb 2024  
**Tested** : 16 Feb 2024  
**Diagnosed** : 19 Feb 2024 - Don Baldrige

**GFL Environmental - 166 - Phenix City**  
 18 Old Brickyard Rd  
 Phenix City, AL  
 US 36869  
 Contact: DEAN PEACE JR  
 dean.peace@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: