




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Area
(BB06478)
Machine Id
827M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (36 QTS)

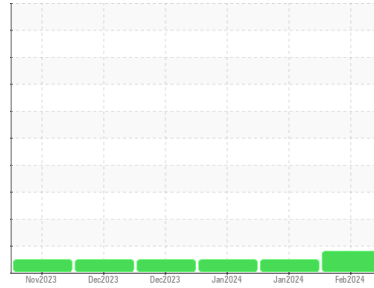

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Exhaust valve wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0110078	GFL0110047	GFL0109993
Sample Date	Client Info		13 Feb 2024	27 Jan 2024	15 Jan 2024
Machine Age	hrs	Client Info	15678	15546	15395
Oil Age	hrs	Client Info	600	600	600
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >130	74	15	16
Chromium	ppm	ASTM D5185m >10	2	<1	<1
Nickel	ppm	ASTM D5185m >4	▲ 6	0	0
Titanium	ppm	ASTM D5185m >2	<1	<1	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	6	3	2
Lead	ppm	ASTM D5185m >20	<1	1	0
Copper	ppm	ASTM D5185m >125	23	<1	<1
Tin	ppm	ASTM D5185m >4	3	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	1	0	<1
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	59	48	58
Manganese	ppm	ASTM D5185m 0	2	<1	<1
Magnesium	ppm	ASTM D5185m 1010	907	846	988
Calcium	ppm	ASTM D5185m 1070	1012	867	984
Phosphorus	ppm	ASTM D5185m 1150	966	927	1087
Zinc	ppm	ASTM D5185m 1270	1213	1139	1287
Sulfur	ppm	ASTM D5185m 2060	2239	2616	3181

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	10	3	5
Sodium	ppm	ASTM D5185m	31	1	2
Potassium	ppm	ASTM D5185m >20	26	2	2

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.3	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	8.3	7.4	6.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.9	18.5	17.9


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.0	15.0	14.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	4.7	8.4	8.3




OIL ANALYSIS REPORT


▲ Ferrous Alloys

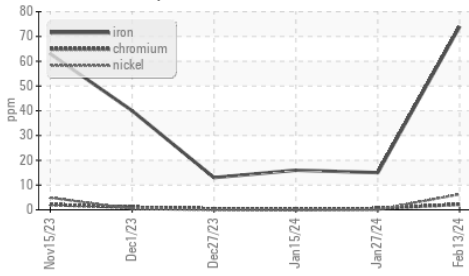

Base Number

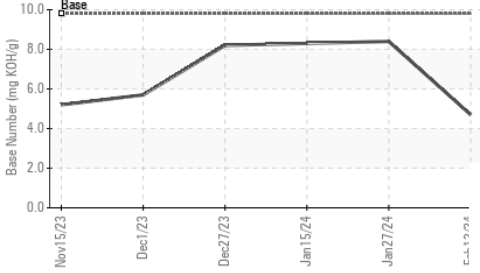

Viscosity @ 100°C

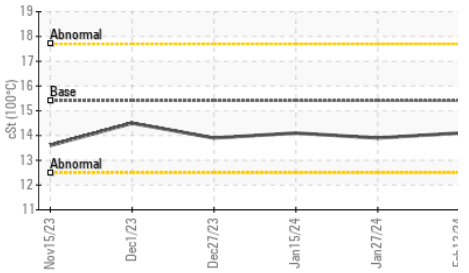

VISUAL


method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG
Free Water	scalar *Visual		NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	15.4	14.1	13.9

GRAPHS


▲ Ferrous Alloys

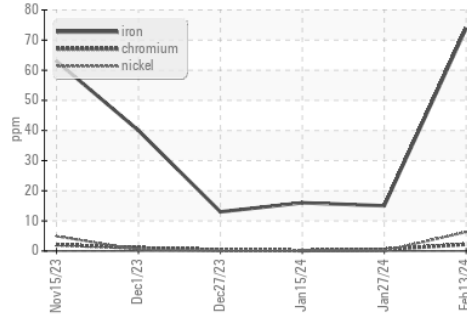


Non-ferrous Metals

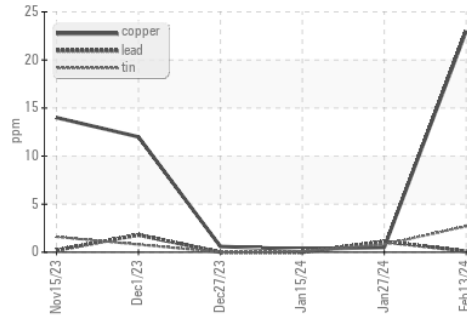

Viscosity @ 100°C

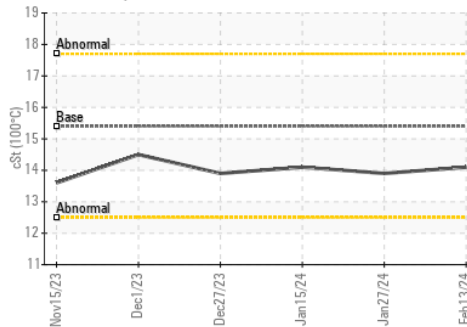

Base Number

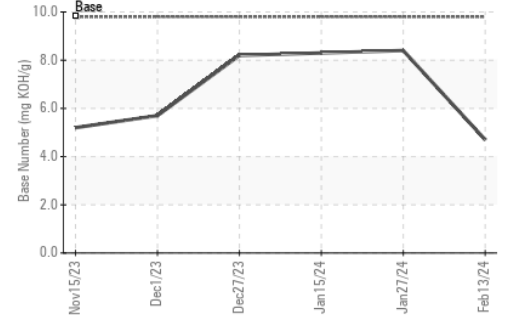

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0110078
 Lab Number : 06091532
 Unique Number : 10884385
 Test Package : FLEET

Received : 16 Feb 2024
 Tested : 19 Feb 2024
 Diagnosed : 19 Feb 2024 - Sean Felton

GFL Environmental - 410 - Michigan West
 39000 Van Born Rd
 Wayne, MI
 US 48184

Contact: Belal Dgheish
 bdgheish@gflenv.com

T: (734)714-2340

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: