




OIL ANALYSIS REPORT

Sample Rating Trend

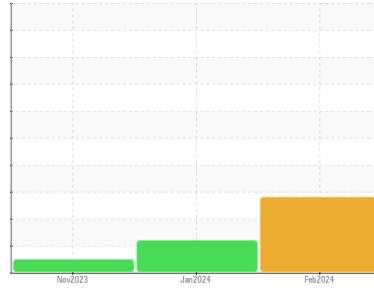

Machine Id
914051
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (36 QTS)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

▲ Wear

Valve wear is indicated.

▲ Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110141	GFL0104253	GFL0059235
Sample Date	Client Info	14 Feb 2024	02 Jan 2024	15 Nov 2023
Machine Age	hrs	1505	34	31
Oil Age	hrs	600	34	31
Oil Changed	Client Info	Changed	Changed	Not Changed
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>120	73	6	89
Chromium	ppm	ASTM D5185m	>20	2	<1	5
Nickel	ppm	ASTM D5185m	>5	▲ 6	0	<1
Titanium	ppm	ASTM D5185m	>2	<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	2	8
Lead	ppm	ASTM D5185m	>40	1	<1	2
Copper	ppm	ASTM D5185m	>330	163	<1	4
Tin	ppm	ASTM D5185m	>15	4	<1	2
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	26	2	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	99	48	64
Manganese	ppm	ASTM D5185m	0	4	<1	1
Magnesium	ppm	ASTM D5185m	1010	783	793	991
Calcium	ppm	ASTM D5185m	1070	1267	865	1141
Phosphorus	ppm	ASTM D5185m	1150	777	969	1043
Zinc	ppm	ASTM D5185m	1270	939	1100	1300
Sulfur	ppm	ASTM D5185m	2060	2018	2908	2710

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	▲ 41	9	14
Sodium	ppm	ASTM D5185m		4	3	13
Potassium	ppm	ASTM D5185m	>20	6	2	1
Fuel	%	ASTM D3524	>3.0	0.5	<1.0	<1.0

INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>4	0.8	0	1.6
Nitration	Abs/cm	*ASTM D7624	>20	12.1	3.9	17.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.7	17.9	30.7

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.3	13.0	31.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	5.1	7.8	4.5







OIL ANALYSIS REPORT

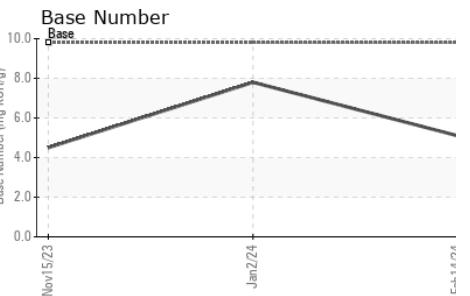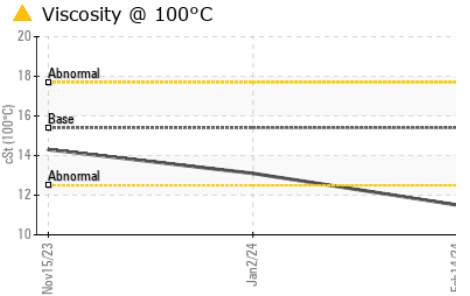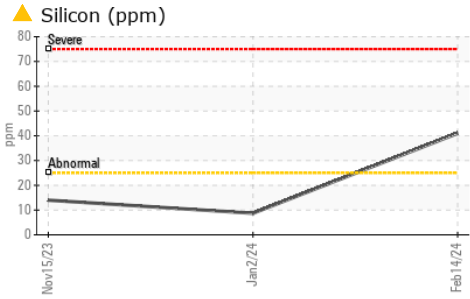

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	▲ HEAVY	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.5	13.1	14.3

GRAPHS

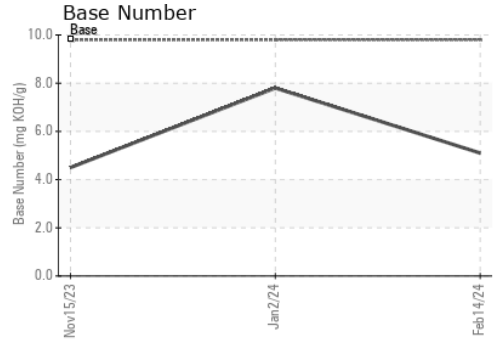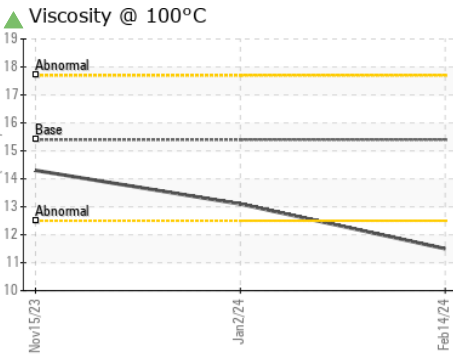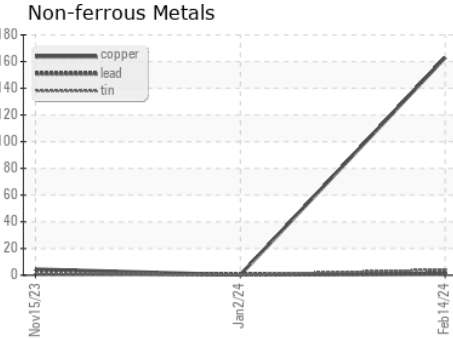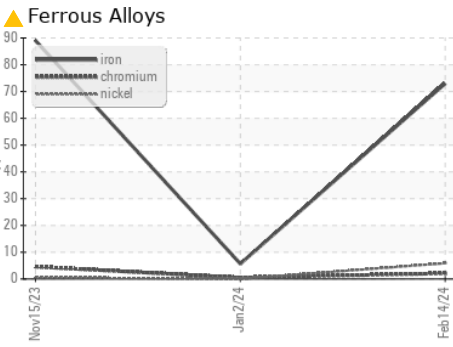

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110141 **Received** : 16 Feb 2024
Lab Number : 06091539 **Tested** : 20 Feb 2024
Unique Number : 10884392 **Diagnosed** : 20 Feb 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GFL Environmental - 410 - Michigan West
 39000 Van Born Rd
 Wayne, MI
 US 48184
 Contact: Belal Dgheish
 bdgheish@gflenv.com
 T: (734)714-2340
 F: