




OIL ANALYSIS REPORT

Sample Rating Trend

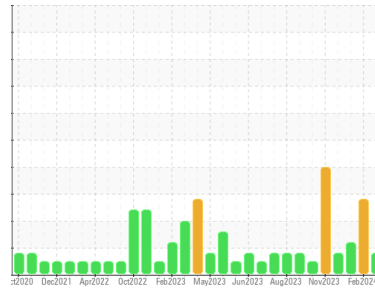

FUEL



Machine Id
728007

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (12 QTS)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0112331	GFL0109935	GFL0109893
Sample Date	Client Info	15 Feb 2024	05 Feb 2024	11 Jan 2024
Machine Age	hrs	12710	12632	12494
Oil Age	hrs	478	400	262
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		MARGINAL	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>90	7	22	18
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	14	9
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	<1	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	16	4	4
Barium	ppm	ASTM D5185m	0	0	0	3
Molybdenum	ppm	ASTM D5185m	60	55	59	57
Manganese	ppm	ASTM D5185m	0	0	<1	0
Magnesium	ppm	ASTM D5185m	1010	810	792	871
Calcium	ppm	ASTM D5185m	1070	946	949	1013
Phosphorus	ppm	ASTM D5185m	1150	906	888	941
Zinc	ppm	ASTM D5185m	1270	1084	1098	1148
Sulfur	ppm	ASTM D5185m	2060	2776	2502	3064

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	5	4	3
Sodium	ppm	ASTM D5185m		<1	2	0
Potassium	ppm	ASTM D5185m	>20	2	8	5
Fuel	%	ASTM D3524	>3.0	▲ 2.6	◆ 11.9	▲ 6.2

INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>6	0.2	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	5.4	11.3	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.4	21.1	19.6

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.1	20.8	17.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.9	5.7	6.8







OIL ANALYSIS REPORT

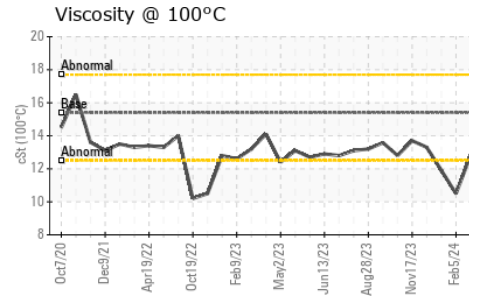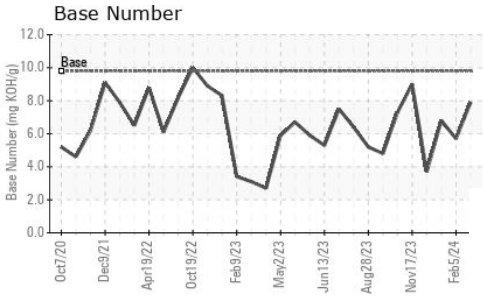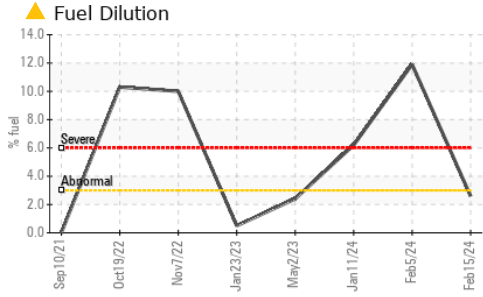

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	10.5

GRAPHS

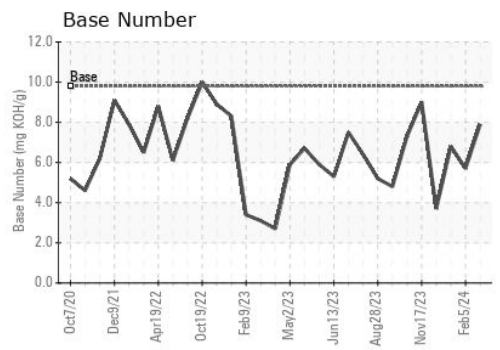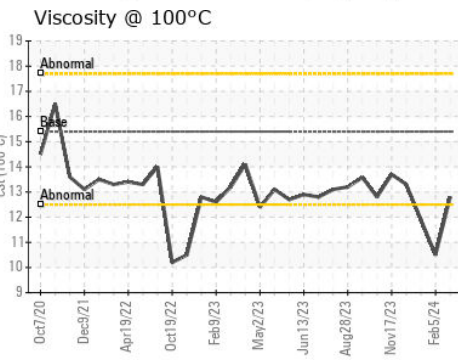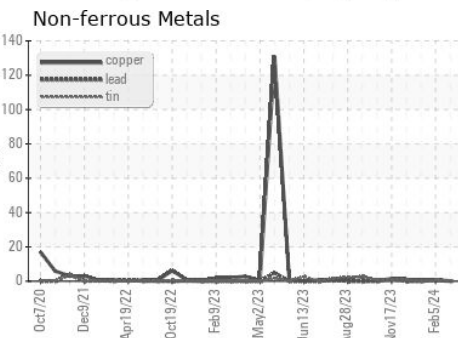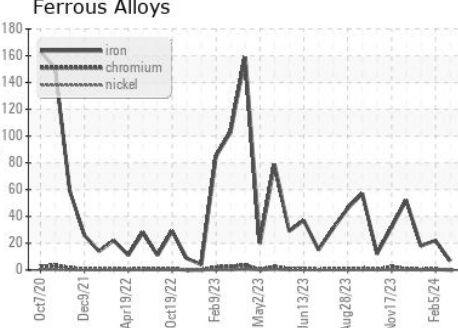

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0112331 **Received** : 16 Feb 2024
Lab Number : 06091641 **Tested** : 19 Feb 2024
Unique Number : 10884494 **Diagnosed** : 19 Feb 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: JOSHUA TINKER
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: