




# OIL ANALYSIS REPORT

Sample Rating Trend

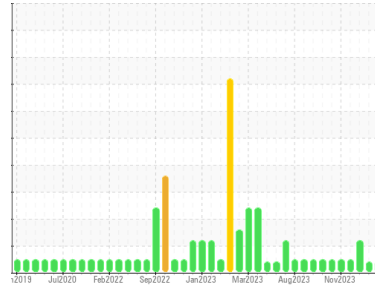

## VISCOSITY



Area  
**(EEY356)**

Machine Id  
**10651**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0112325</b>	GFL0109959	GFL0109865	
Sample Date	Client Info	<b>13 Feb 2024</b>	08 Feb 2024	17 Jan 2024	
Machine Age	hrs	Client Info	<b>21222</b>	21191	21065
Oil Age	hrs	Client Info	<b>586</b>	555	429
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd	
Sample Status		<b>ATTENTION</b>	ATTENTION	ABNORMAL	

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	▲ 2.4
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>20</b>	19	18
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>3</b>	3	3
Lead	ppm ASTM D5185m >25	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >100	<b>1</b>	<1	1
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>5</b>	12	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>53</b>	56	58
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>758</b>	801	907
Calcium	ppm ASTM D5185m 1070	<b>977</b>	1017	1012
Phosphorus	ppm ASTM D5185m 1150	<b>887</b>	949	1001
Zinc	ppm ASTM D5185m 1270	<b>1069</b>	1114	1214
Sulfur	ppm ASTM D5185m 2060	<b>2559</b>	2560	2903

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	6	6
Sodium	ppm ASTM D5185m	<b>11</b>	10	9
Potassium	ppm ASTM D5185m >20	<b>1</b>	0	<1

### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.5</b>	0.6	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>10.1</b>	10.4	10.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.0</b>	20.8	20.1


### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.7</b>	18.2	17.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>5.8</b>	6.5	6.5




# OIL ANALYSIS REPORT

▲ Viscosity @ 100°C

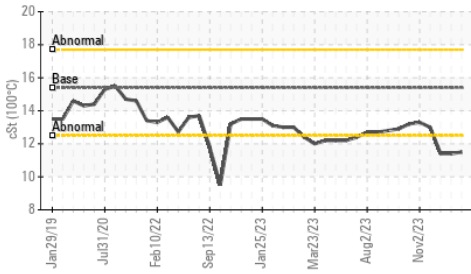

Base Number

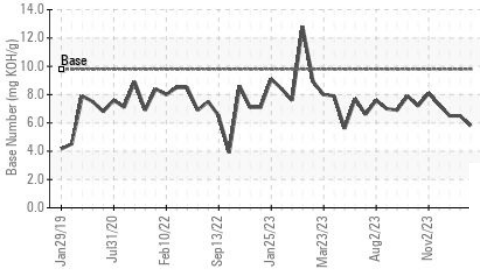


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 11.5	▲ 11.4	▲ 11.4

## GRAPHS


Ferrous Alloys

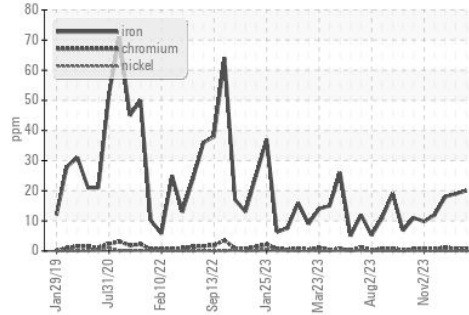


Non-ferrous Metals

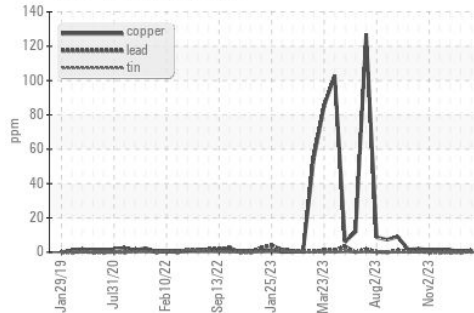

▲ Viscosity @ 100°C

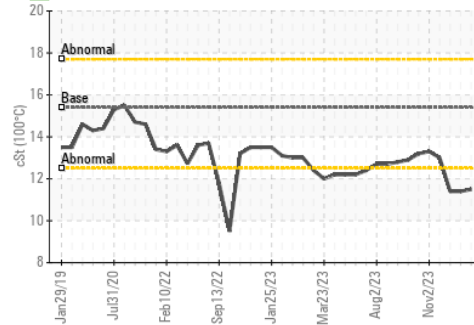

Base Number

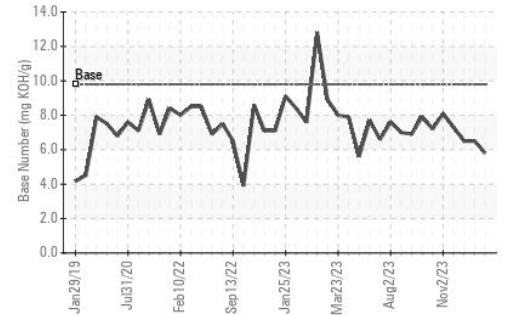

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0112325  
**Lab Number** : 06091647  
**Unique Number** : 10884500  
**Test Package** : FLEET

**Received** : 16 Feb 2024  
**Tested** : 19 Feb 2024  
**Diagnosed** : 19 Feb 2024 - Don Baldrige

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: