


Machine Id
MH-87
 Component
Diesel Engine
 Fluid
DISEL ENGINE OIL SAE 15W40 (--- GAL)

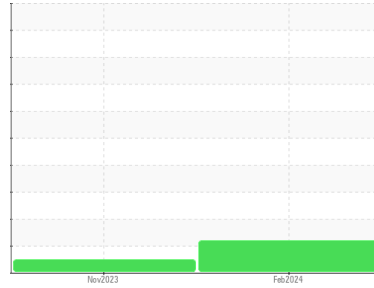

DIAGNOSIS

Recommendation
 We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

Wear
 All component wear rates are normal.

Contamination
 There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0113826	PCA0103220	---
Sample Date	Client Info	12 Feb 2024	20 Nov 2023	---
Machine Age	hrs	3476	9666	---
Oil Age	hrs	250	500	---
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	---
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	15	2	---
Chromium	ppm ASTM D5185m >20	<1	0	---
Nickel	ppm ASTM D5185m >4	0	0	---
Titanium	ppm ASTM D5185m	<1	0	---
Silver	ppm ASTM D5185m >3	0	0	---
Aluminum	ppm ASTM D5185m >20	2	2	---
Lead	ppm ASTM D5185m >40	0	0	---
Copper	ppm ASTM D5185m >330	<1	<1	---
Tin	ppm ASTM D5185m >15	0	<1	---
Vanadium	ppm ASTM D5185m	0	0	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	4	4	---
Barium	ppm ASTM D5185m 10	0	0	---
Molybdenum	ppm ASTM D5185m 100	52	54	---
Manganese	ppm ASTM D5185m	<1	<1	---
Magnesium	ppm ASTM D5185m 450	885	867	---
Calcium	ppm ASTM D5185m 3000	1027	993	---
Phosphorus	ppm ASTM D5185m 1150	980	993	---
Zinc	ppm ASTM D5185m 1350	1197	1207	---
Sulfur	ppm ASTM D5185m 4250	2936	3009	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	6	2	---
Sodium	ppm ASTM D5185m >158	1	2	---
Potassium	ppm ASTM D5185m >20	2	3	---
Fuel	% ASTM D3524 >5	▲ 7.0	<1.0	---




INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	0.1	---
Nitration	Abs/cm *ASTM D7624 >20	9.3	7.3	---
Sulfation	Abs/.1mm *ASTM D7415 >30	19.6	21.4	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.6	20.5	---
Base Number (BN)	mg KOH/g ASTM D2896 8.5	8.51	10.16	---









OIL ANALYSIS REPORT

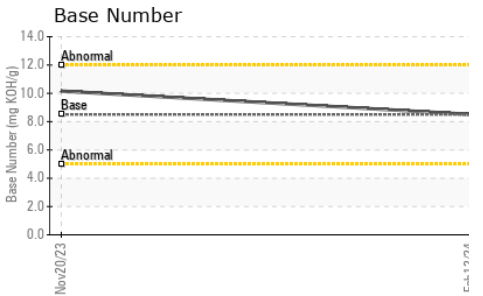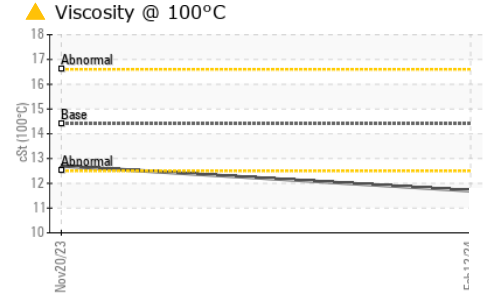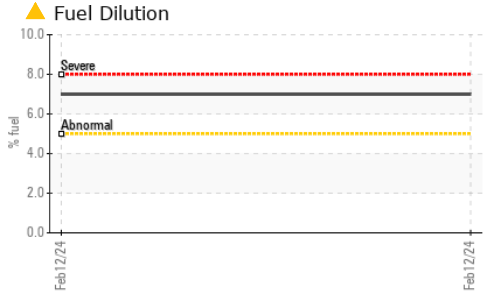

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 11.7	12.7	---

GRAPHS

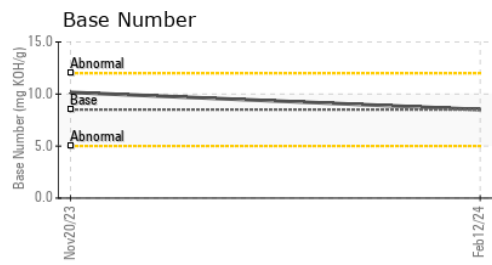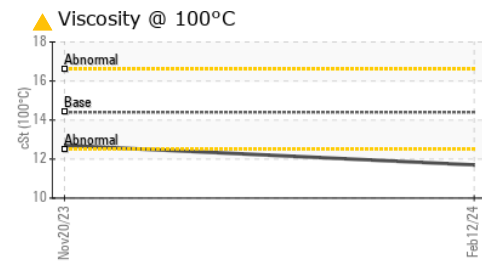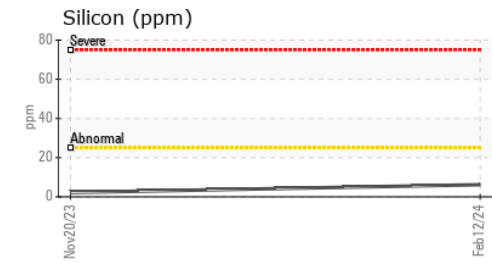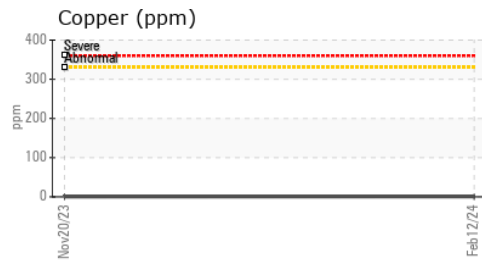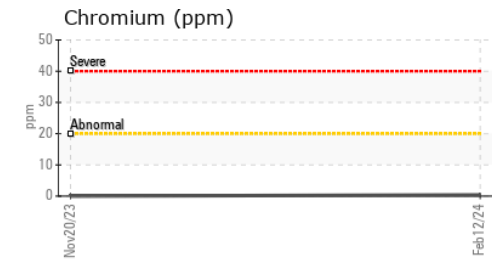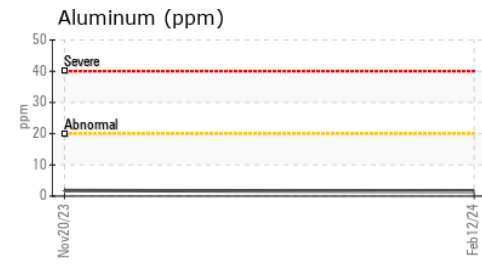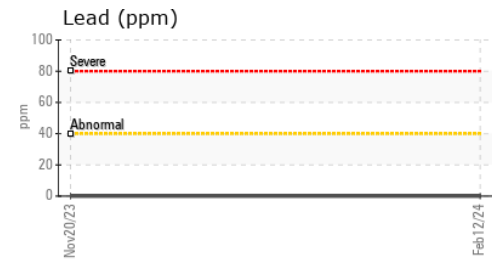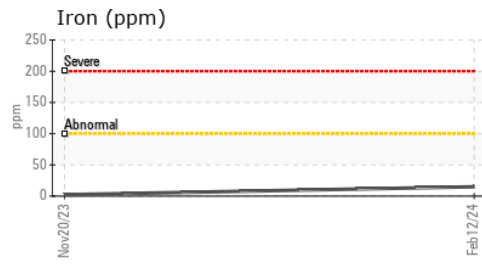

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113826 **Received** : 16 Feb 2024
Lab Number : 06091915 **Tested** : 20 Feb 2024
Unique Number : 10884768 **Diagnosed** : 20 Feb 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

SCRAP METAL SERVICES NON-FERROUS DIVISION
 3000 W 139TH ST
 BLUE ISLAND, IL
 US 60406
 Contact: SERGIO FERNANDEZ
 sfernandez@scrapmetalservices.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)