




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

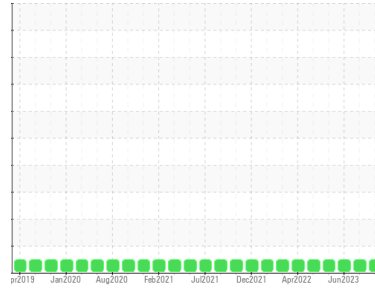

Area
(P662071)
 Machine Id
10910C

Component
Natural Gas Engine
 Fluid

PETRO CANADA DURON GEO LD 15W40 (10 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110376	GFL0096937	GFL0084252
Sample Date	Client Info	15 Feb 2024	03 Jan 2024	30 Jun 2023
Machine Age	hrs	11138	10858	9832
Oil Age	hrs	1026	1026	9832
Oil Changed	Client Info	Changed	Not Changd	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	14	11	14
Chromium	ppm ASTM D5185m >4	2	1	2
Nickel	ppm ASTM D5185m >2	<1	<1	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	<1	0	0
Aluminum	ppm ASTM D5185m >9	1	1	1
Lead	ppm ASTM D5185m >30	2	<1	0
Copper	ppm ASTM D5185m >35	1	<1	<1
Tin	ppm ASTM D5185m >4	<1	<1	<1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	6	6	17
Barium	ppm ASTM D5185m 5	0	11	0
Molybdenum	ppm ASTM D5185m 50	59	58	59
Manganese	ppm ASTM D5185m 0	1	<1	<1
Magnesium	ppm ASTM D5185m 560	594	548	657
Calcium	ppm ASTM D5185m 1510	1491	1447	1506
Phosphorus	ppm ASTM D5185m 780	741	774	842
Zinc	ppm ASTM D5185m 870	978	931	1023
Sulfur	ppm ASTM D5185m 2040	2809	2750	2969

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	4	3	3
Sodium	ppm ASTM D5185m	3	4	5
Potassium	ppm ASTM D5185m >20	2	2	<1

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0.1	0	0.1
Nitration	Abs/cm *ASTM D7624 >20	7.0	11.1	8.9
Sulfation	Abs/.1mm *ASTM D7415 >30	16.9	23.3	20.7

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	12.5	18.3	16.9
Base Number (BN)	mg KOH/g ASTM D2896 10.2	6.2	3.5	6.5







OIL ANALYSIS REPORT

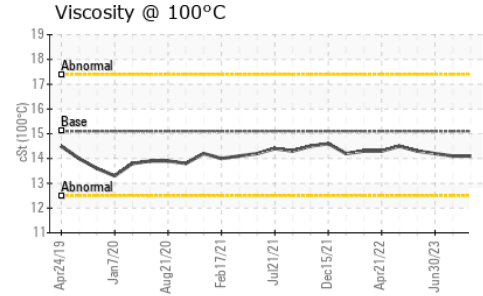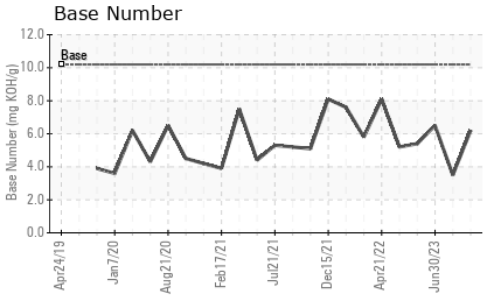

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	14.1	14.1	14.2

GRAPHS

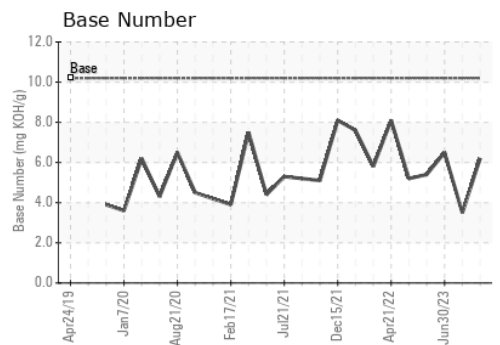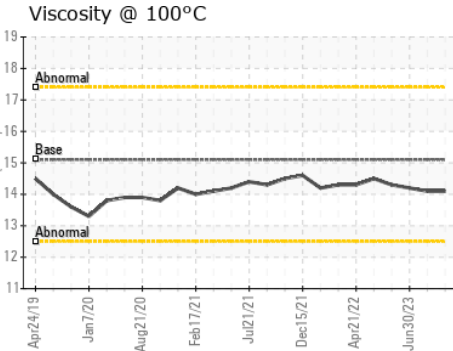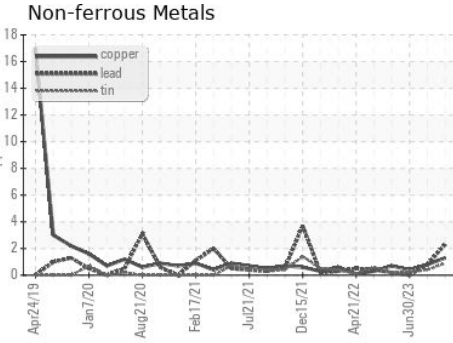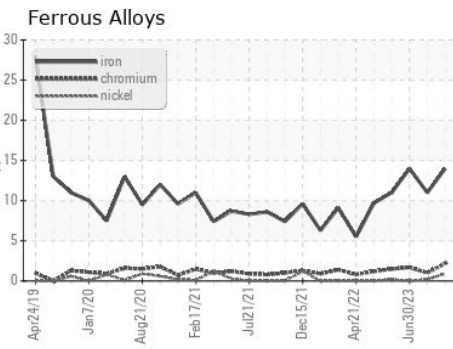

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110376 **Received** : 16 Feb 2024
Lab Number : 06092150 **Tested** : 19 Feb 2024
Unique Number : 10885003 **Diagnosed** : 19 Feb 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 031 - Greenville/Spartanburg
 1635 Antioch Church Rd
 Piedmont, SC
 US 29673
 Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: