



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Area  
**(P662031)**  
Machine Id  
**10892C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (11 GAL)**

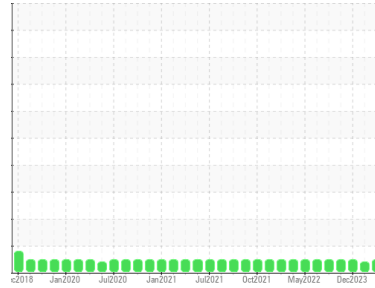

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0110378</b>	GFL0096913	GFL0069746
Sample Date	Client Info		<b>15 Feb 2024</b>	07 Feb 2024	28 Dec 2023
Machine Age	hrs	Client Info	<b>5650</b>	5580	5270
Oil Age	hrs	Client Info	<b>5650</b>	5580	5270
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>12</b>	43	11
Chromium	ppm	ASTM D5185m >4	<b>1</b>	4	<1
Nickel	ppm	ASTM D5185m >2	<b>1</b>	2	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>3</b>	4	2
Lead	ppm	ASTM D5185m >30	<b>1</b>	7	3
Copper	ppm	ASTM D5185m >35	<b>1</b>	2	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>23</b>	10	6
Barium	ppm	ASTM D5185m 5	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 50	<b>83</b>	73	63
Manganese	ppm	ASTM D5185m 0	<b>1</b>	2	<1
Magnesium	ppm	ASTM D5185m 560	<b>898</b>	749	678
Calcium	ppm	ASTM D5185m 1510	<b>2156</b>	1750	1668
Phosphorus	ppm	ASTM D5185m 780	<b>1009</b>	922	801
Zinc	ppm	ASTM D5185m 870	<b>1437</b>	1206	1096
Sulfur	ppm	ASTM D5185m 2040	<b>3849</b>	2595	2561

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>9</b>	43	8
Sodium	ppm	ASTM D5185m	<b>8</b>	8	7
Potassium	ppm	ASTM D5185m >20	<b>2</b>	4	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	13.6	11.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.4</b>	25.1	24.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.1</b>	20.3	19.4
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>5.3</b>	6.3	3.4







# OIL ANALYSIS REPORT

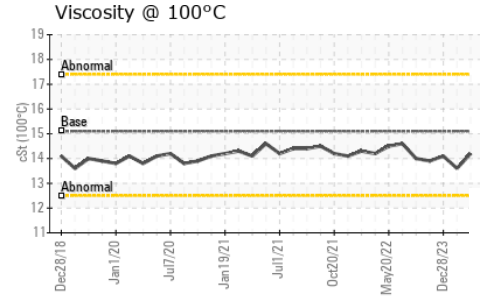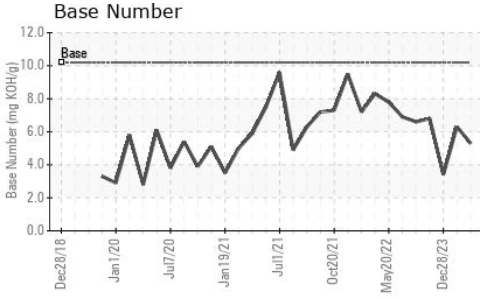

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	14.2	13.6	14.1

## GRAPHS

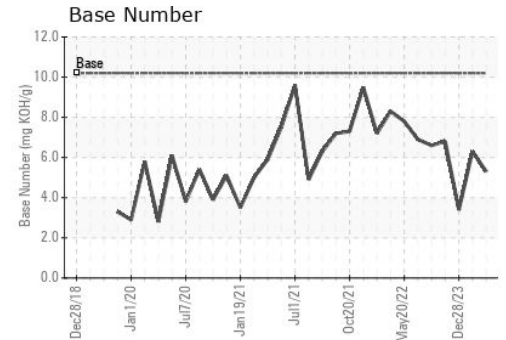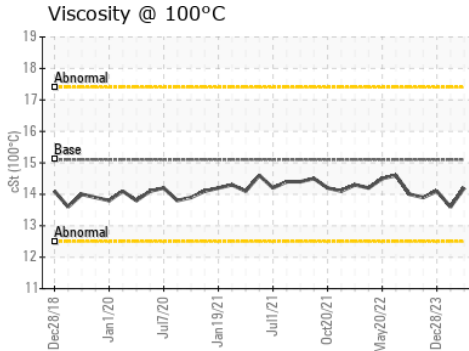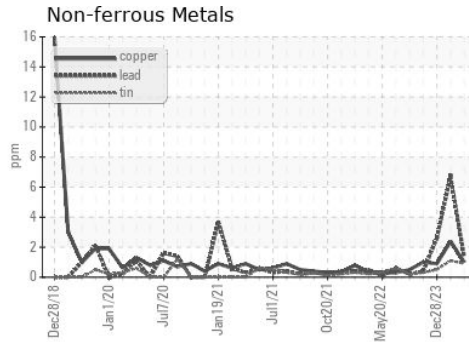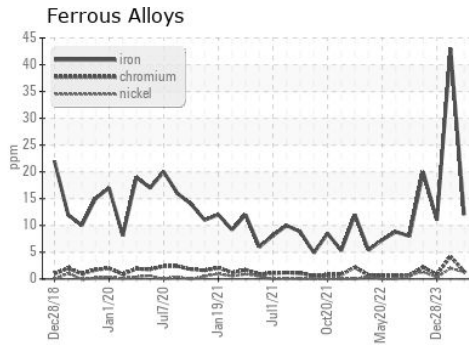

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0110378  
 Lab Number : 06092151  
 Unique Number : 10885004  
 Test Package : FLEET

Received : 16 Feb 2024  
 Tested : 19 Feb 2024  
 Diagnosed : 20 Feb 2024 - Don Baldrige

GFL Environmental - 031 - Greenville/Spartanburg  
 1635 Antioch Church Rd  
 Piedmont, SC  
 US 29673  
 Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: