


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

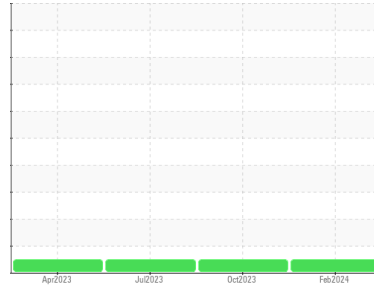

Area  
**(89946X) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A69008**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0117846</b>	PCA0105415	PCA0093796	
Sample Date	Client Info	<b>06 Feb 2024</b>	11 Oct 2023	21 Jul 2023	
Machine Age	mls	Client Info	<b>563117</b>	546304	518768
Oil Age	mls	Client Info	<b>45000</b>	25000	50000
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>19</b>	10	15
Chromium	ppm ASTM D5185m >5	<b>2</b>	<1	1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >30	<b>8</b>	5	10
Lead	ppm ASTM D5185m >30	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >150	<b>5</b>	4	3
Tin	ppm ASTM D5185m >5	<b>1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>&lt;1</b>	0	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>62</b>	61	69
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 950	<b>969</b>	932	1065
Calcium	ppm ASTM D5185m 1050	<b>1041</b>	1070	1168
Phosphorus	ppm ASTM D5185m 995	<b>942</b>	963	1092
Zinc	ppm ASTM D5185m 1180	<b>1231</b>	1246	1380
Sulfur	ppm ASTM D5185m 2600	<b>2820</b>	3119	3392

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>8</b>	5	10
Sodium	ppm ASTM D5185m	<b>0</b>	0	1
Potassium	ppm ASTM D5185m >20	<b>4</b>	3	<1



### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	0.6	0.8
Nitration	Abs/cm *ASTM D7624 >20	<b>8.8</b>	8.2	9.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.9</b>	20.6	22.0

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.8</b>	16.6	18.1
Base Number (BN)	mg KOH/g ASTM D2896	<b>6.4</b>	7.6	6.5





# OIL ANALYSIS REPORT

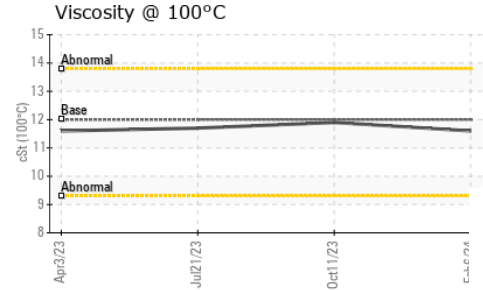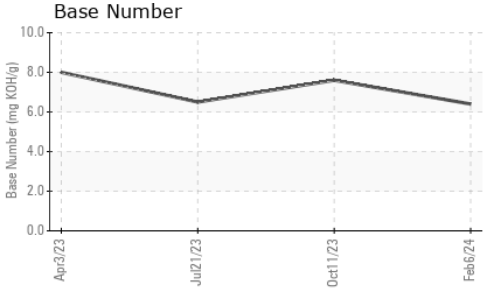

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.6</b>	11.9	11.7

## GRAPHS

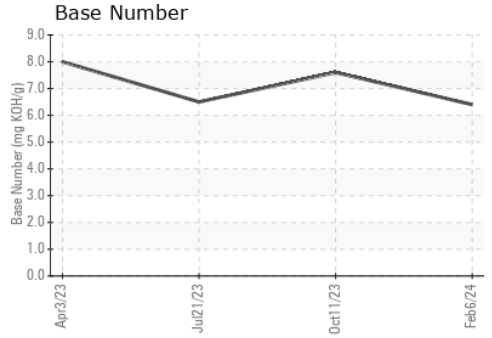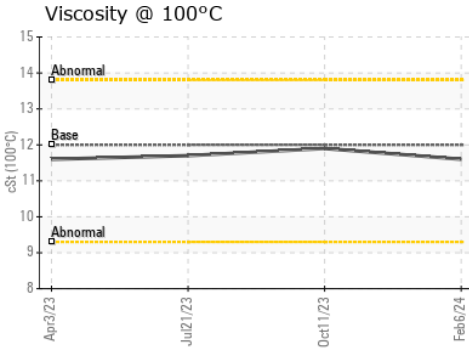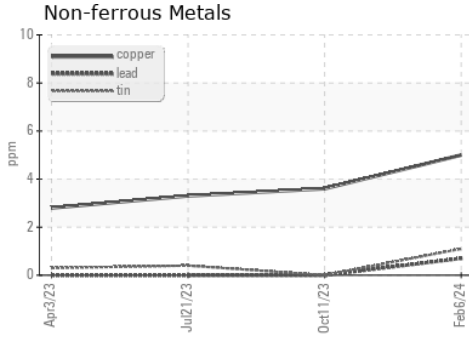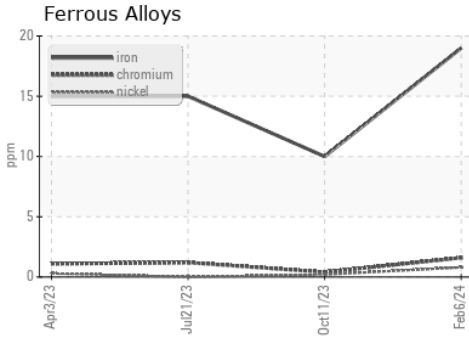

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117846 **Received** : 16 Feb 2024  
**Lab Number** : **06092248** **Tested** : 19 Feb 2024  
**Unique Number** : 10885101 **Diagnosed** : 19 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1366 - Berkeley-Woodland**  
 2370 East Main Street  
 Woodland, CA  
 US 95776  
 Contact: Gary Mann  
 gmanna@transervice.com  
 T: (530)666-7771  
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)