


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

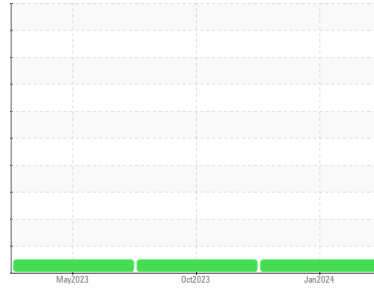

Area  
**(16046Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A61261**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0117903</b>	PCA0105416	PCA0093774
Sample Date	Client Info		<b>16 Jan 2024</b>	18 Oct 2023	09 May 2023
Machine Age	mls	Client Info	<b>390546</b>	378582	325016
Oil Age	mls	Client Info	<b>38000</b>	25000	25000
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>25</b>	11	10
Chromium	ppm	ASTM D5185m >5	<b>2</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>9</b>	4	6
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>7</b>	4	3
Tin	ppm	ASTM D5185m >5	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>3</b>	<1	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>82</b>	60	63
Manganese	ppm	ASTM D5185m 0	<b>1</b>	0	<1
Magnesium	ppm	ASTM D5185m 950	<b>1329</b>	912	929
Calcium	ppm	ASTM D5185m 1050	<b>1440</b>	1079	1081
Phosphorus	ppm	ASTM D5185m 995	<b>1325</b>	980	1010
Zinc	ppm	ASTM D5185m 1180	<b>1698</b>	1238	1232
Sulfur	ppm	ASTM D5185m 2600	<b>4348</b>	3123	2944

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>14</b>	6	8
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>9</b>	5	6



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	8.0	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.7</b>	19.9	19.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.8</b>	16.1	15.9
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.8</b>	7.8	8.2





# OIL ANALYSIS REPORT

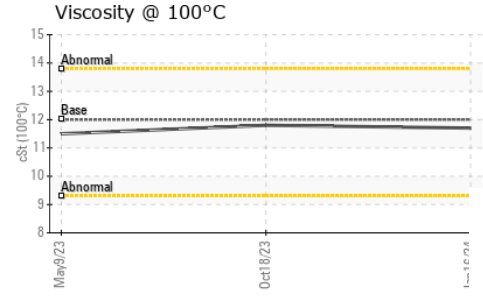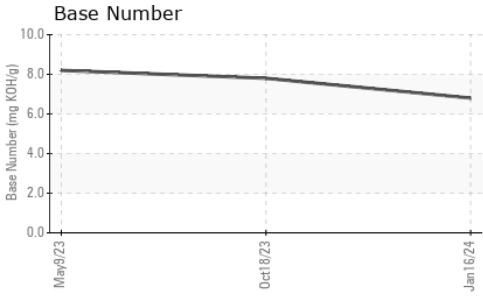

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.7	11.8

## GRAPHS

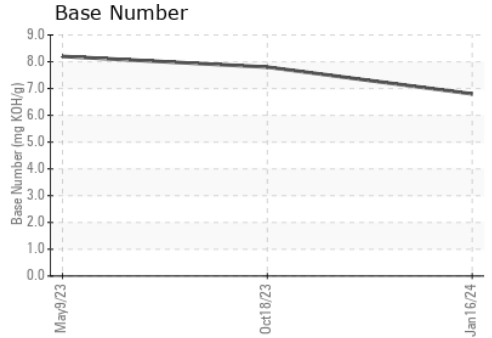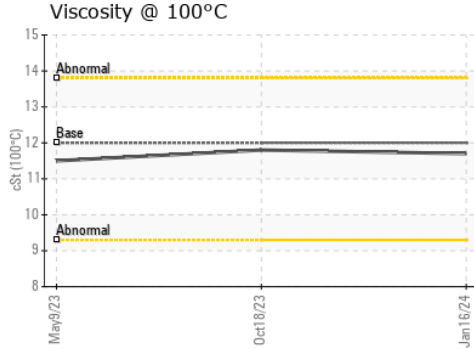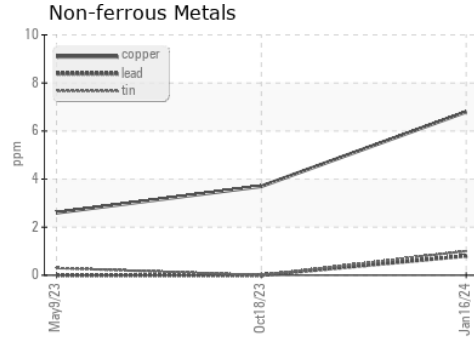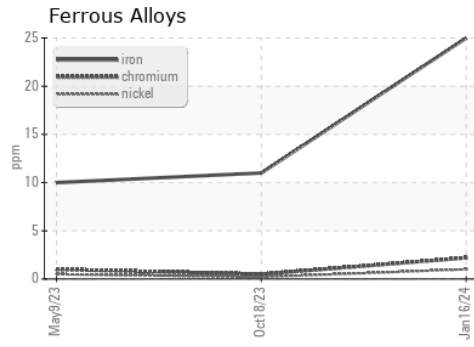

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117903  
**Lab Number** : 06092256  
**Unique Number** : 10885109  
**Test Package** : FLEET  
**Received** : 16 Feb 2024  
**Tested** : 19 Feb 2024  
**Diagnosed** : 20 Feb 2024 - Jonathan Hester

**Transervice - Shop 1366 - Berkeley-Woodland**  
 2370 East Main Street  
 Woodland, CA  
 US 95776  
 Contact: Gary Mann  
 gmanna@transervice.com  
 T: (530)666-7771  
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)