


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

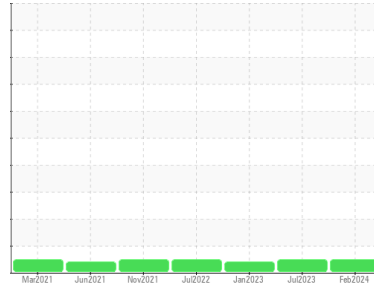

Machine Id
T270

Component
Front Differential

Fluid
CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0113204	PCA0096926	PCA0091186
Sample Date	Client Info		03 Feb 2024	13 Jul 2023	25 Jan 2023
Machine Age	mls	Client Info	203162	203396	178361
Oil Age	mls	Client Info	0	177683	25713
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	109	86	52
Chromium	ppm	ASTM D5185m >10	<1	<1	<1
Nickel	ppm	ASTM D5185m >10	0	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	1	1	4
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	<1	<1	1
Tin	ppm	ASTM D5185m >10	0	0	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	188	239	214
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	17	19	18
Manganese	ppm	ASTM D5185m	4	4	2
Magnesium	ppm	ASTM D5185m	188	181	172
Calcium	ppm	ASTM D5185m	240	250	238
Phosphorus	ppm	ASTM D5185m	1330	1348	1261
Zinc	ppm	ASTM D5185m	262	257	259
Sulfur	ppm	ASTM D5185m	19802	23088	20693


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	15	13	10
Sodium	ppm	ASTM D5185m	1	2	1
Potassium	ppm	ASTM D5185m >20	0	0	<1

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT

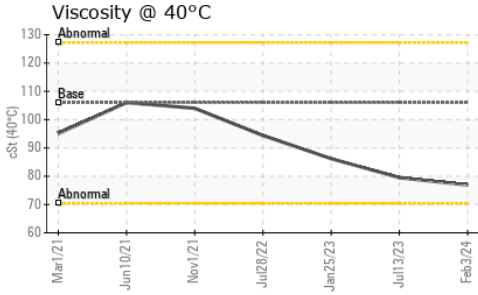




FLUID PROPERTIES

	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	106	76.9	79.5	86.2

SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

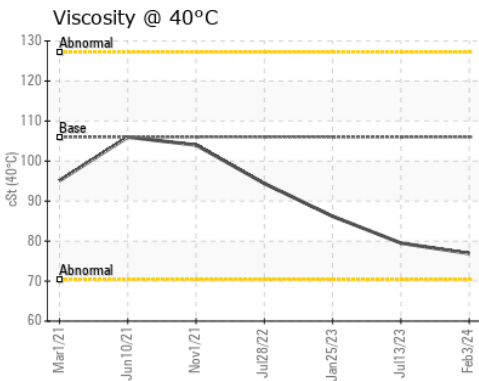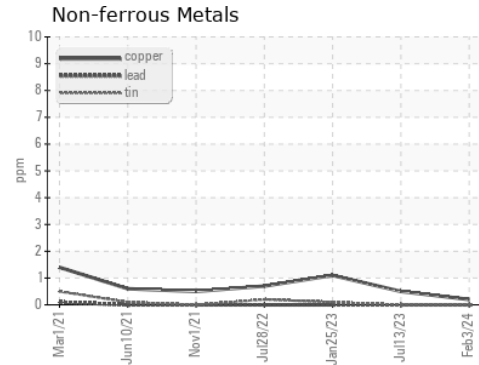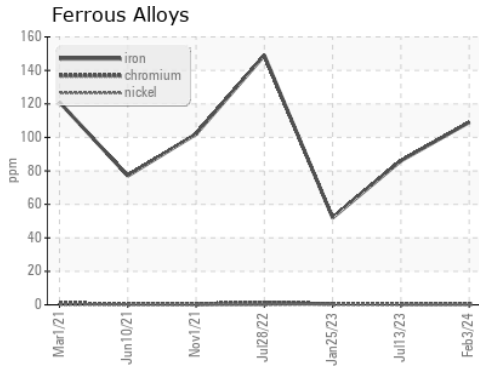

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113204
Lab Number : 06093364
Unique Number : 10886217
Test Package : FLEET
Received : 19 Feb 2024
Tested : 20 Feb 2024
Diagnosed : 20 Feb 2024 - Wes Davis

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673
 Contact: James Threatt
 jthreatt@nwwhite.com
 T: (864)918-4646
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)