




OIL ANALYSIS REPORT

Sample Rating Trend

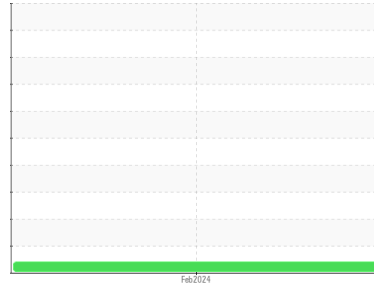

VISCOSITY



Machine Id
514045 PETERBILT 567

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0103990	---	---
Sample Date	Client Info	08 Feb 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ATTENTION	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	39	---	---
Chromium	ppm ASTM D5185m >4	<1	---	---
Nickel	ppm ASTM D5185m >2	0	---	---
Titanium	ppm ASTM D5185m	<1	---	---
Silver	ppm ASTM D5185m >2	<1	---	---
Aluminum	ppm ASTM D5185m >25	20	---	---
Lead	ppm ASTM D5185m >45	1	---	---
Copper	ppm ASTM D5185m >85	18	---	---
Tin	ppm ASTM D5185m >4	<1	---	---
Vanadium	ppm ASTM D5185m	<1	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	42	---	---
Barium	ppm ASTM D5185m 0	<1	---	---
Molybdenum	ppm ASTM D5185m 60	7	---	---
Manganese	ppm ASTM D5185m 0	1	---	---
Magnesium	ppm ASTM D5185m 1010	690	---	---
Calcium	ppm ASTM D5185m 1070	1419	---	---
Phosphorus	ppm ASTM D5185m 1150	731	---	---
Zinc	ppm ASTM D5185m 1270	861	---	---
Sulfur	ppm ASTM D5185m 2060	2805	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	12	---	---
Sodium	ppm ASTM D5185m	2	---	---
Potassium	ppm ASTM D5185m >20	63	---	---
Fuel	% ASTM D3524 >5	1.4	---	---

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	---	---
Nitration	Abs/cm *ASTM D7624 >20	8.5	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	19.2	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.2	---	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.2	---	---







OIL ANALYSIS REPORT

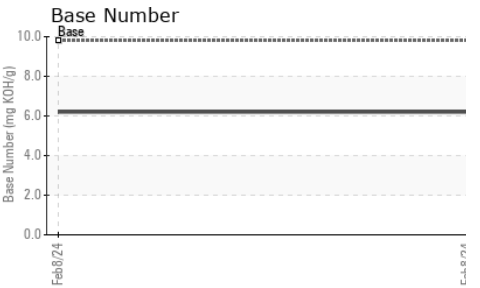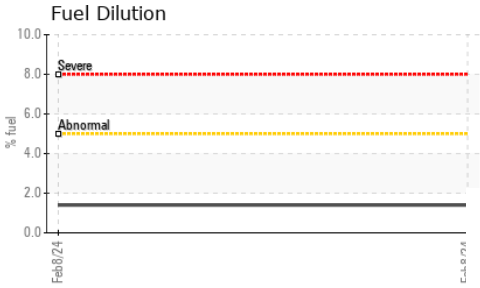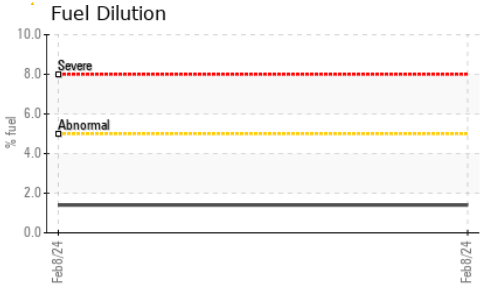

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.5	---

GRAPHS

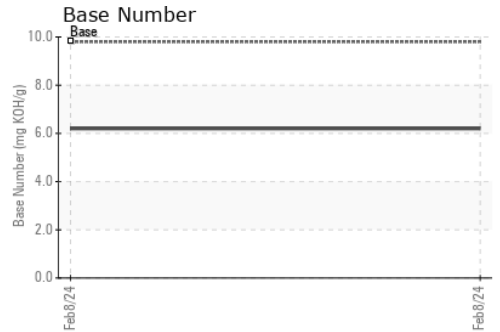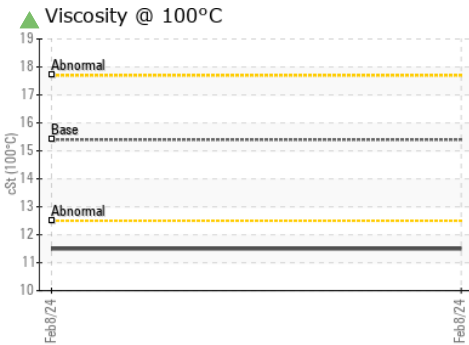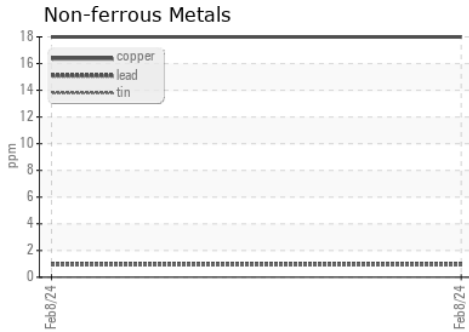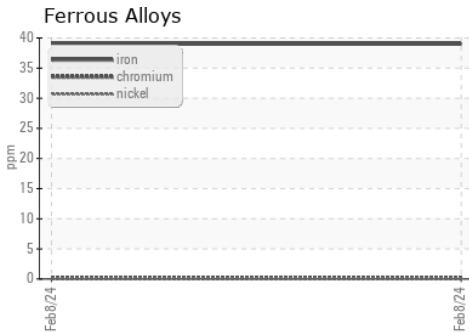

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0103990 **Received** : 19 Feb 2024
Lab Number : 06093549 **Tested** : 22 Feb 2024
Unique Number : 10886402 **Diagnosed** : 22 Feb 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 980 - Northside Hauling
 1820 Candle Ridge Park Dr
 Houston, TX
 US 77073
 Contact: Edwin Collins
 ecolins@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: