


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

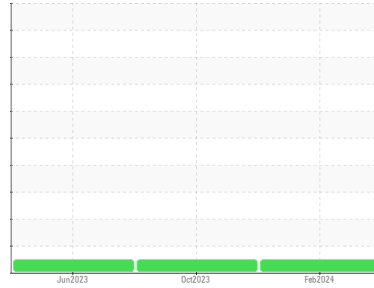

Area  
**(14243Z) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A61450**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0110554</b>	PCA0093519	PCA0093558
Sample Date	Client Info		<b>05 Feb 2024</b>	10 Oct 2023	14 Jun 2023
Machine Age	mls	Client Info	<b>303380</b>	287300	261743
Oil Age	mls	Client Info	<b>16080</b>	25300	22166
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>18</b>	14	9
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	0
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>4</b>	12	3
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	4	7
Lead	ppm	ASTM D5185m >40	<b>2</b>	3	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>20</b>	12	11
Barium	ppm	ASTM D5185m 0	<b>3</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>88</b>	49	54
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m 950	<b>1306</b>	813	946
Calcium	ppm	ASTM D5185m 1050	<b>1566</b>	1196	1328
Phosphorus	ppm	ASTM D5185m 995	<b>1421</b>	859	1084
Zinc	ppm	ASTM D5185m 1180	<b>1766</b>	1184	1411
Sulfur	ppm	ASTM D5185m 2600	<b>4649</b>	2930	4093

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	4	2
Sodium	ppm	ASTM D5185m	<b>0</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>8</b>	8	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.1</b>	9.6	8.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.7</b>	20.5	19.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.7</b>	16.5	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.7</b>	6.4	7.6





# OIL ANALYSIS REPORT

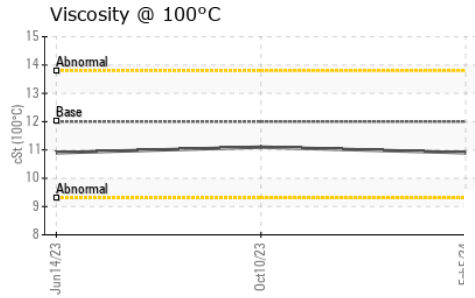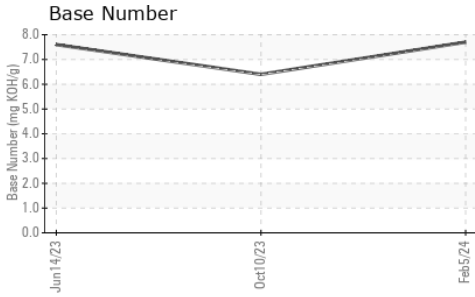

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.9</b>	11.1	10.9

## GRAPHS

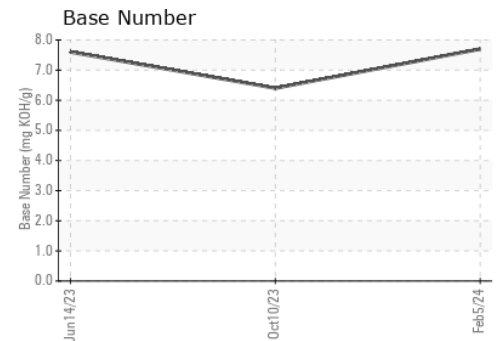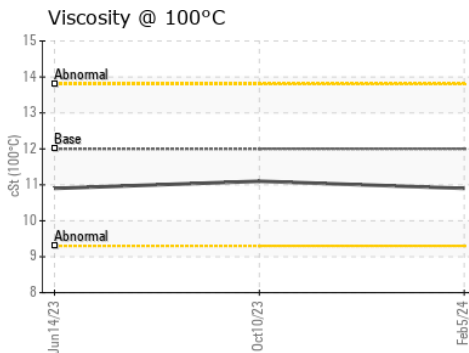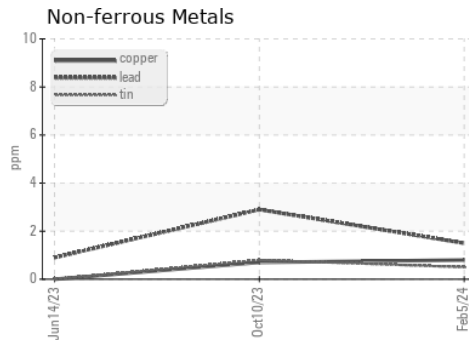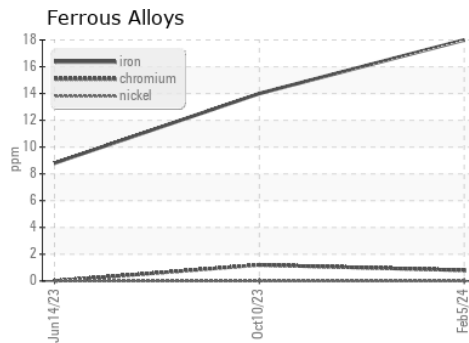

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0110554  
**Lab Number** : 06094043  
**Unique Number** : 10886896  
**Test Package** : FLEET

**Received** : 20 Feb 2024  
**Tested** : 21 Feb 2024  
**Diagnosed** : 21 Feb 2024 - Don Baldrige

**Transervice - Shop 1376 - Berkeley-Linden**  
 3425 Tremley Point Road  
 Linden, NJ  
 US 07036

Contact: Shop 1376 Oil Analysis  
 shop1376@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: