




# OIL ANALYSIS REPORT

Sample Rating Trend

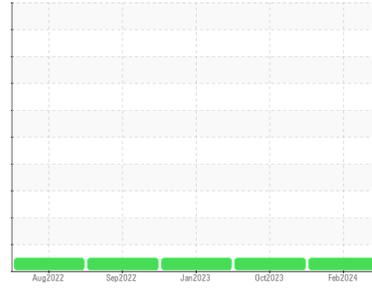

**NORMAL**



Machine Id  
**929072**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0107476</b>	GFL0064697	GFL0072511
Sample Date	Client Info	<b>15 Feb 2024</b>	10 Oct 2023	19 Jan 2023
Machine Age	hrs	<b>9930</b>	9314	7898
Oil Age	hrs	<b>616</b>	608	608
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>13</b>	18	8
Chromium	ppm ASTM D5185m >4	<b>0</b>	<1	0
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>7</b>	4	1
Lead	ppm ASTM D5185m >45	<b>0</b>	0	0
Copper	ppm ASTM D5185m >85	<b>2</b>	3	2
Tin	ppm ASTM D5185m >4	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>22</b>	8	27
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>68</b>	62	71
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>970</b>	846	844
Calcium	ppm ASTM D5185m 1070	<b>1292</b>	1237	1189
Phosphorus	ppm ASTM D5185m 1150	<b>1053</b>	927	896
Zinc	ppm ASTM D5185m 1270	<b>1298</b>	1199	1118
Sulfur	ppm ASTM D5185m 2060	<b>3224</b>	2434	2573

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>5</b>	3	3
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	2	0
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	3	3

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.6</b>	1.2	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>9.4</b>	10.9	9.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.7</b>	25.1	21.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.3</b>	20.6	18.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.9</b>	4.8	7.2







# OIL ANALYSIS REPORT

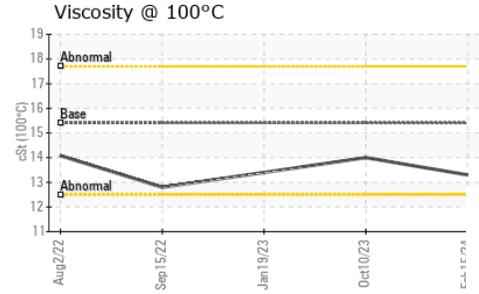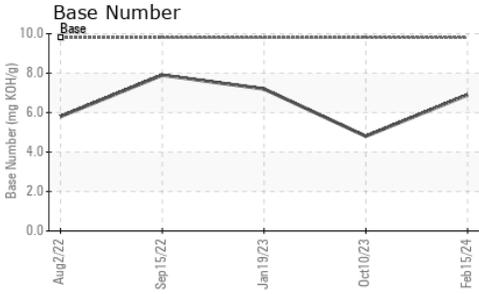

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	14.0

## GRAPHS

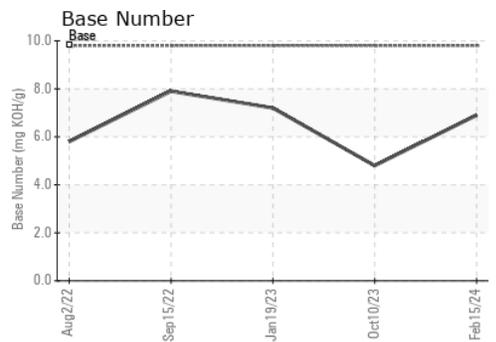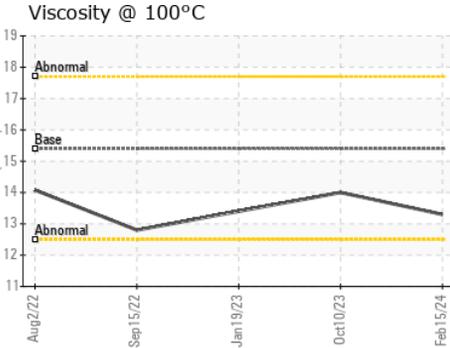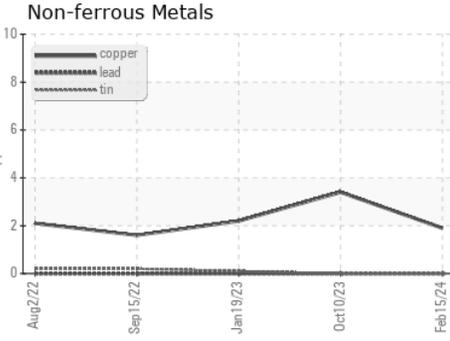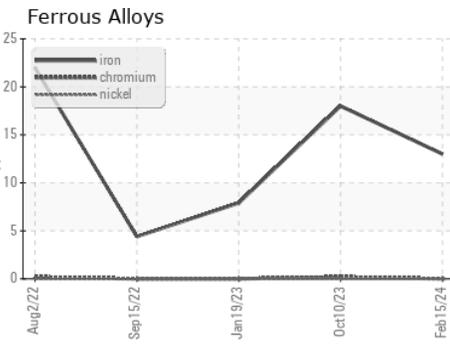

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107476 **Received** : 20 Feb 2024  
**Lab Number** : 06094743 **Tested** : 21 Feb 2024  
**Unique Number** : 10887596 **Diagnosed** : 21 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 912 - Fort Atkinson HC**  
 1215 Klement St.  
 Fort Atkinson, WI  
 US 53538  
 Contact: LEONARD KOZLEUCHAR  
 leonard.kozleuchar@gflenv.com  
 T: (262)210-6528  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)