


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

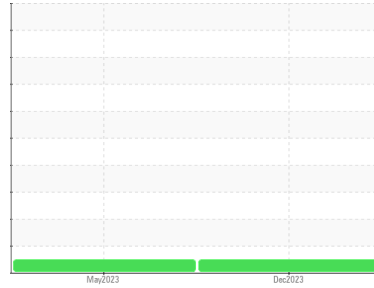

Machine Id
8605
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0051800	PCA0088593	---
Sample Date	Client Info			22 Dec 2023	22 May 2023	---
Machine Age	mls	Client Info		199600	113200	---
Oil Age	mls	Client Info		34000	35000	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	15	21	---
Chromium	ppm	ASTM D5185m	>20	<1	1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	4	5	---
Lead	ppm	ASTM D5185m	>40	3	2	---
Copper	ppm	ASTM D5185m	>330	<1	2	---
Tin	ppm	ASTM D5185m	>15	<1	2	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	29	25	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	50	7	45	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	950	790	557	---
Calcium	ppm	ASTM D5185m	1050	1398	1669	---
Phosphorus	ppm	ASTM D5185m	995	767	735	---
Zinc	ppm	ASTM D5185m	1180	924	969	---
Sulfur	ppm	ASTM D5185m	2600	3223	2801	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6	8	---
Sodium	ppm	ASTM D5185m		2	6	---
Potassium	ppm	ASTM D5185m	>20	4	7	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	10.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	24.1	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.6	23.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.8	7.9	---









OIL ANALYSIS REPORT

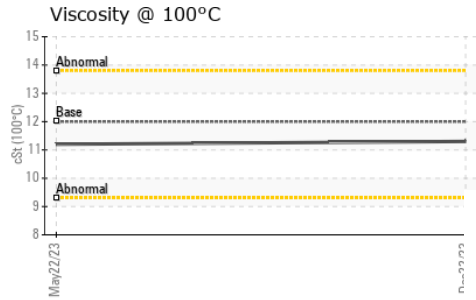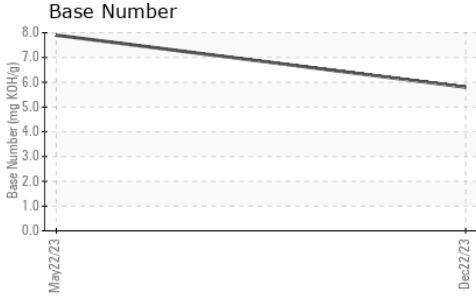

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	11.2

GRAPHS

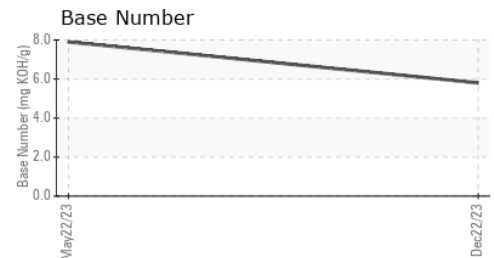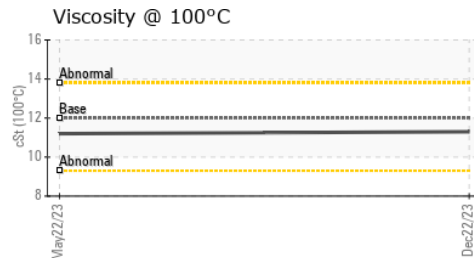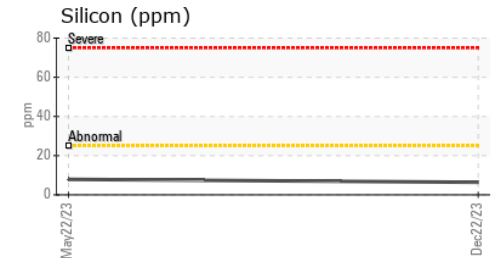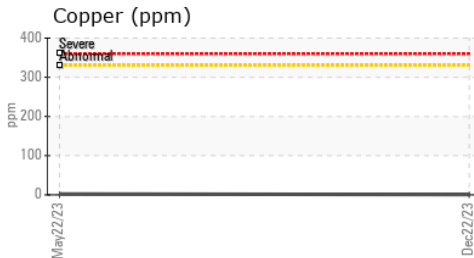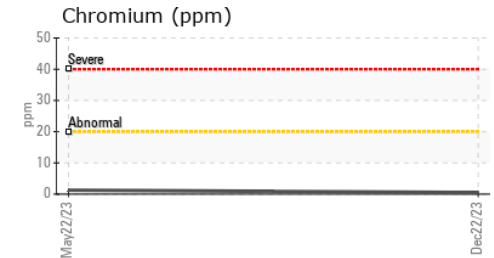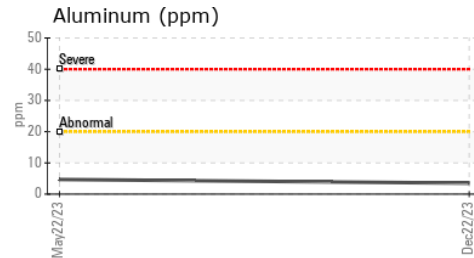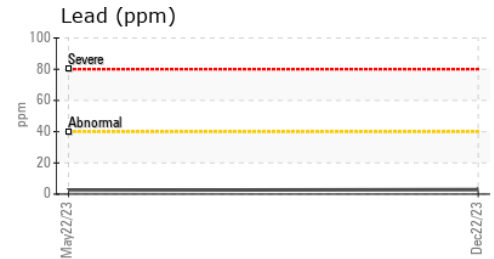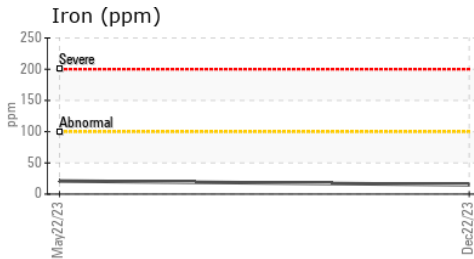

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0051800 **Received** : 20 Feb 2024
Lab Number : 06094779 **Tested** : 21 Feb 2024
Unique Number : 10887632 **Diagnosed** : 21 Feb 2024 - Wes Davis
Test Package : MOB1+

MIDWEST MOTOR EXPRESS
 2169 MUSTANG DR
 MOUNDS VIEW, MN
 US 55112
 Contact: FRANK DIETZ
 frank.dietz@mmeinc.com
 T: (763)225-6382
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)