




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(YA145276)**  
Machine Id  
**810031**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (50 QTS)**

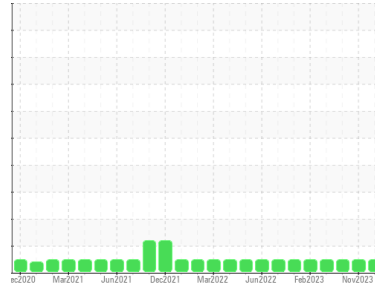

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0088514</b>	GFL0098104	GFL0088571
Sample Date	Client Info	<b>19 Feb 2024</b>	01 Nov 2023	17 Jul 2023
Machine Age	hrs	<b>2256</b>	2256	2256
Oil Age	hrs	<b>702</b>	255	540
Oil Changed	Client Info	<b>Changed</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>24</b>	23	18
Chromium	ppm ASTM D5185m >20	<b>1</b>	1	1
Nickel	ppm ASTM D5185m >5	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>5</b>	4	3
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	1	<1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	2	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>1</b>	6	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	62	63
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>961</b>	878	1034
Calcium	ppm ASTM D5185m 1070	<b>1072</b>	1300	1149
Phosphorus	ppm ASTM D5185m 1150	<b>1008</b>	854	1001
Zinc	ppm ASTM D5185m 1270	<b>1272</b>	1242	1346
Sulfur	ppm ASTM D5185m 2060	<b>2481</b>	2992	3286

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>14</b>	15	12
Sodium	ppm ASTM D5185m	<b>6</b>	1	6
Potassium	ppm ASTM D5185m >20	<b>3</b>	6	8

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>1.1</b>	1.1	0.8
Nitration	Abs/cm *ASTM D7624 >20	<b>10.2</b>	9.9	9.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.9</b>	22.2	20.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.4</b>	17.4	15.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>4.9</b>	5.8	6.8







# OIL ANALYSIS REPORT

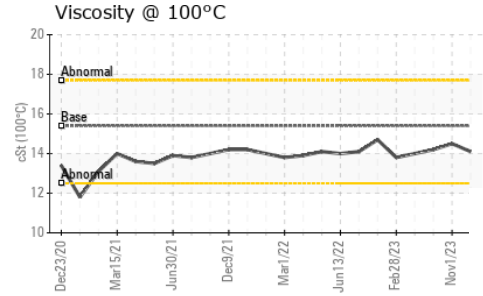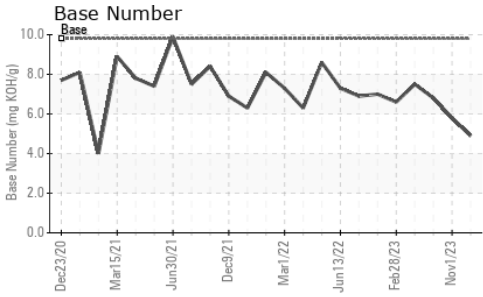

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	14.5	14.2

## GRAPHS

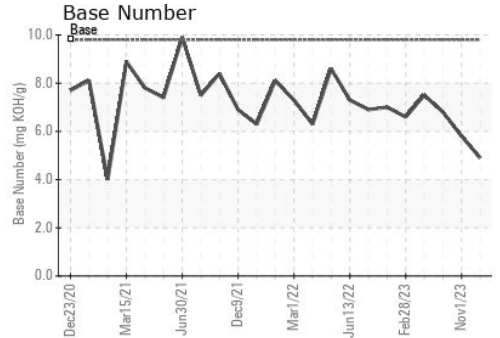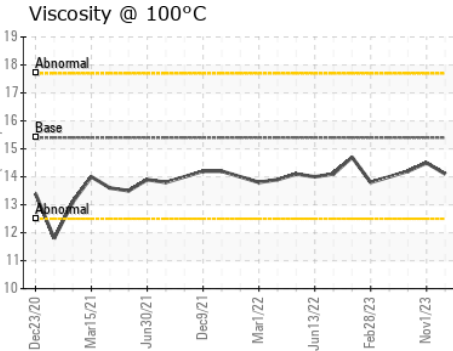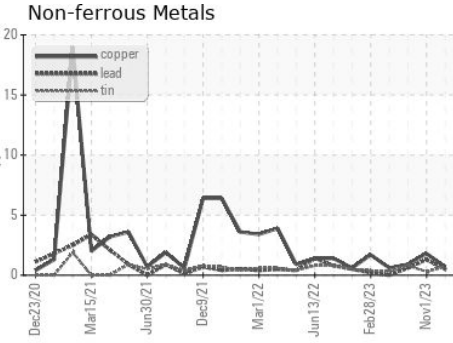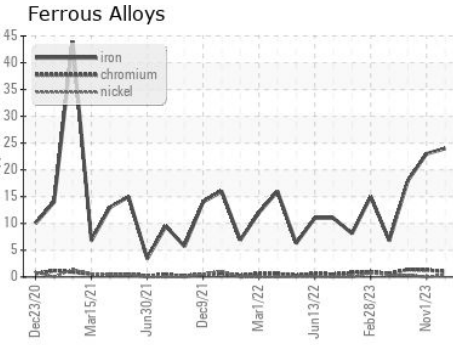

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0088514      **Received** : 20 Feb 2024  
**Lab Number** : 06094876      **Tested** : 21 Feb 2024  
**Unique Number** : 10887729      **Diagnosed** : 21 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 017 - Durham**  
 148 Stone Park Court  
 Durham, NC  
 US 27703  
 Contact: William Russel  
 william.russell@gflenv.com  
 T:  
 F: (919)598-1852

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)