




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
(TS45704) S0916A-Suamico
 Machine Id
523078
 Component
Front Center Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (44 QTS)

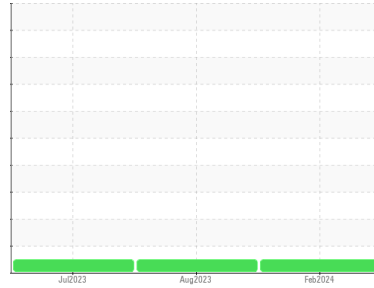

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0095948	GFL0074836	GFL0074830
Sample Date	Client Info			12 Feb 2024	16 Aug 2023	12 Jul 2023
Machine Age	hrs Client Info			20579	20479	20473
Oil Age	hrs Client Info			100	6	426
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>165		16	7	35
Chromium	ppm ASTM D5185m	>5		<1	<1	2
Nickel	ppm ASTM D5185m	>4		<1	0	0
Titanium	ppm ASTM D5185m	>2		0	0	0
Silver	ppm ASTM D5185m	>2		<1	<1	0
Aluminum	ppm ASTM D5185m	>20		4	3	4
Lead	ppm ASTM D5185m	>150		2	0	2
Copper	ppm ASTM D5185m	>90		1	0	2
Tin	ppm ASTM D5185m	>5		<1	0	<1
Vanadium	ppm ASTM D5185m			0	0	0
Cadmium	ppm ASTM D5185m			0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0		10	9	16
Barium	ppm ASTM D5185m	0		0	0	0
Molybdenum	ppm ASTM D5185m	60		60	52	60
Manganese	ppm ASTM D5185m	0		<1	<1	<1
Magnesium	ppm ASTM D5185m	1010		900	882	936
Calcium	ppm ASTM D5185m	1070		1071	1063	1110
Phosphorus	ppm ASTM D5185m	1150		1096	960	966
Zinc	ppm ASTM D5185m	1270		1247	1177	1248
Sulfur	ppm ASTM D5185m	2060		3180	3495	3463



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>35		6	4	6
Sodium	ppm ASTM D5185m			4	1	4
Potassium	ppm ASTM D5185m	>20		10	1	9

INFRA-RED		method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>7.5		0.5	0.2	0.8
Nitration	Abs/cm *ASTM D7624	>20		6.0	5.2	9.6
Sulfation	Abs/.1mm *ASTM D7415	>30		18.5	17.6	20.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25		13.4	13.3	15.7
Base Number (BN)	mg KOH/g ASTM D2896	9.8		9.2	9.3	8.1







OIL ANALYSIS REPORT

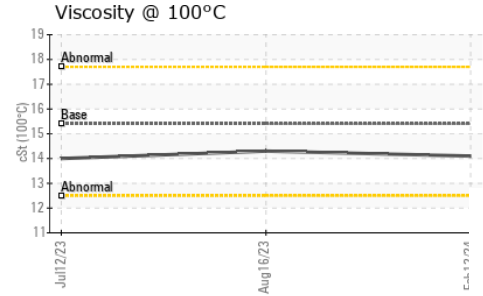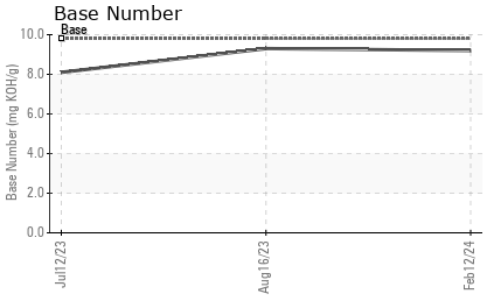

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.3	14.0

GRAPHS

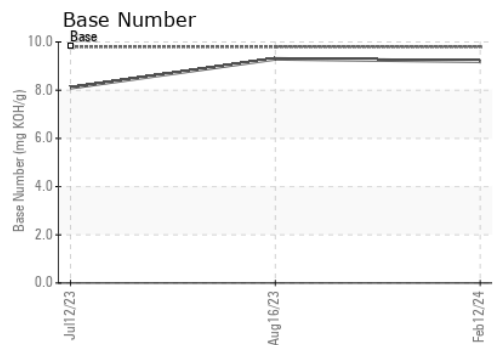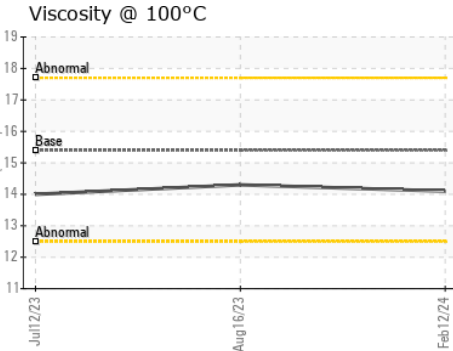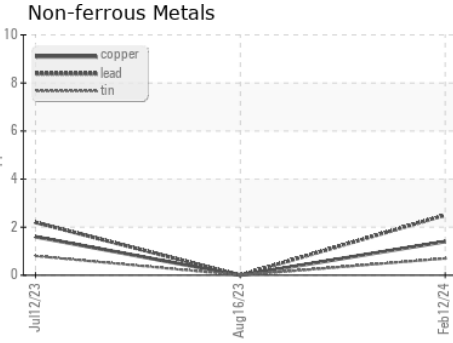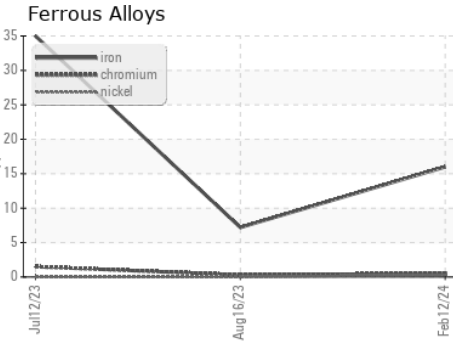

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0095948 **Received** : 21 Feb 2024
Lab Number : **06095276** **Tested** : 27 Feb 2024
Unique Number : 10888129 **Diagnosed** : 27 Feb 2024 - Jonathan Hester
Test Package : FLEET

GFL Environmental - 916A - Suamico
 2300 Deerfield Ave E
 Suamico, WI
 US 54313
 Contact: NICHOLAS WEIDNER
 nweidner@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)