


OIL ANALYSIS REPORT

Sample Rating Trend



DEGRADATION

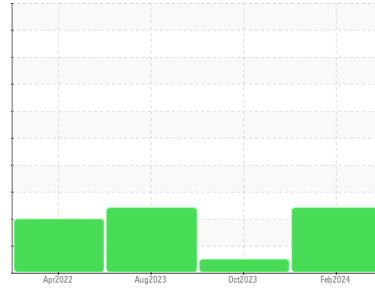

Machine Id
721537
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is higher than normal. The BN level is low.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0114600	PCA0108323	PCA0102878
Sample Date	Client Info			07 Feb 2024	31 Oct 2023	08 Aug 2023
Machine Age	mls	Client Info		327339	291919	156156
Oil Age	mls	Client Info		0	291919	156156
Oil Changed	Client Info			Changed	Not Changd	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	▲ 115	69	▲ 126
Chromium	ppm	ASTM D5185m	>20	4	2	4
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	15	9	14
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	9	5	7
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	6	6	28
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	50	51	49	14
Manganese	ppm	ASTM D5185m	0	<1	<1	2
Magnesium	ppm	ASTM D5185m	950	926	870	846
Calcium	ppm	ASTM D5185m	1050	1297	1354	1824
Phosphorus	ppm	ASTM D5185m	995	979	965	922
Zinc	ppm	ASTM D5185m	1180	1226	1177	1071
Sulfur	ppm	ASTM D5185m	2600	2699	2564	3769


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	11	8	14
Sodium	ppm	ASTM D5185m		0	4	4
Potassium	ppm	ASTM D5185m	>20	21	11	26

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	2.6	1.7	2.4
Nitration	Abs/cm	*ASTM D7624	>20	19.6	14.4	17.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	37.3	29.8	37.5


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	43.4	30.5	40.0
Base Number (BN)	mg KOH/g	ASTM D2896		▲ 1.5	4.5	▲ 3.4

OIL ANALYSIS REPORT


▲ Ferrous Alloys

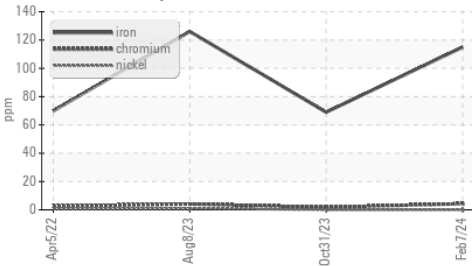

▲ Ferrous Alloys

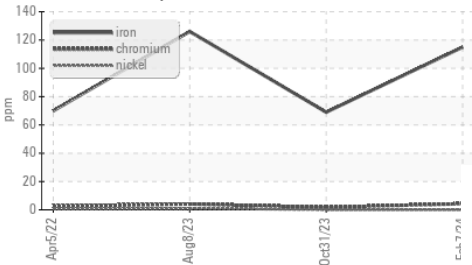

▲ Viscosity @ 100°C

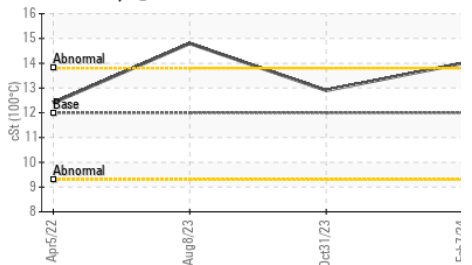


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00 ▲ 14.0	12.9	▲ 14.8

GRAPHS


▲ Iron (ppm)

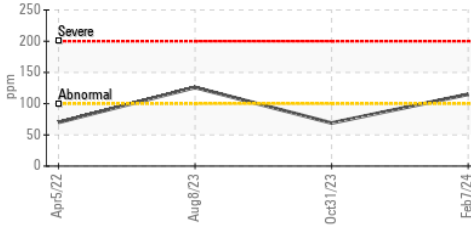


▲ Lead (ppm)

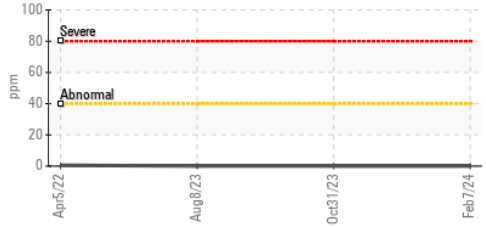


▲ Aluminum (ppm)

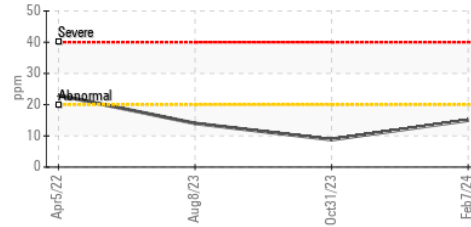


▲ Chromium (ppm)

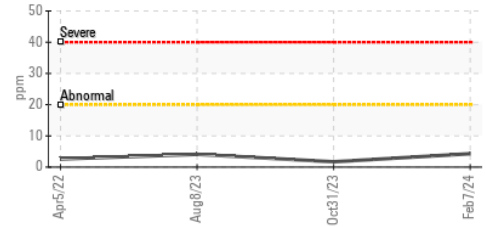


▲ Copper (ppm)

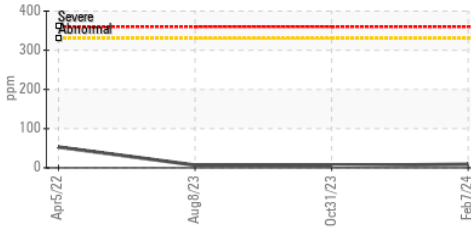


▲ Silicon (ppm)

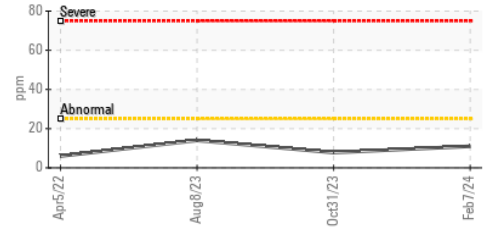

▲ Viscosity @ 100°C

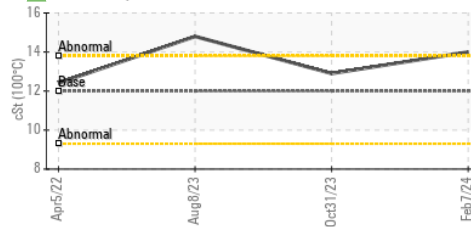

▲ Base Number

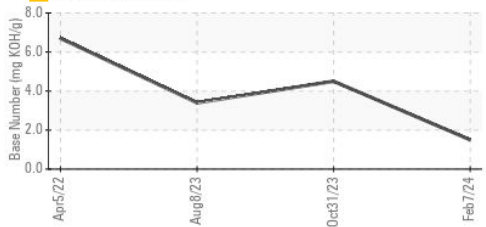

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114600 **Received** : 21 Feb 2024
Lab Number : 06095282 **Tested** : 22 Feb 2024
Unique Number : 10888135 **Diagnosed** : 22 Feb 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #118
 2196 BENNETT ROAD
 PHILADELPHIA, PA
 US 19116
 Contact: ROSTY VITER
 rviter@millertransgroup.com
 T: (215)552-9832
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)