




# OIL ANALYSIS REPORT

Sample Rating Trend

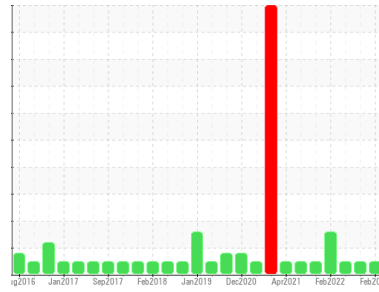

**NORMAL**



Area  
**(YA130651)**

Machine Id  
**3675C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (35 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0109505</b>	GFL0058793	GFL0039491
Sample Date	Client Info	<b>15 Feb 2024</b>	02 Feb 2023	15 Aug 2022
Machine Age	hrs	<b>11872</b>	11872	0
Oil Age	hrs	<b>1200</b>	11872	0
Oil Changed	Client Info	<b>Changed</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>4</b>	11	28
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	4
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>2</b>	2	5
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >35	<b>&lt;1</b>	2	4
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	<b>42</b>	38	49
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>49</b>	55	51
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>566</b>	691	504
Calcium	ppm	ASTM D5185m 1510	<b>1493</b>	1353	1393
Phosphorus	ppm	ASTM D5185m 780	<b>765</b>	846	771
Zinc	ppm	ASTM D5185m 870	<b>949</b>	1055	931
Sulfur	ppm	ASTM D5185m 2040	<b>2488</b>	3263	2565

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	<b>4</b>	3	13
Sodium	ppm	ASTM D5185m	<b>2</b>	1	6
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	2

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.3</b>	6.4	6.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.5</b>	18.0	19.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.8</b>	14.5	15.6
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>8.5</b>	8.9	10.4







# OIL ANALYSIS REPORT

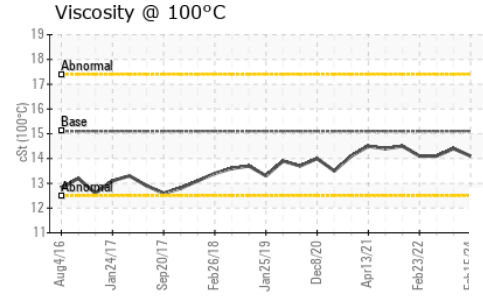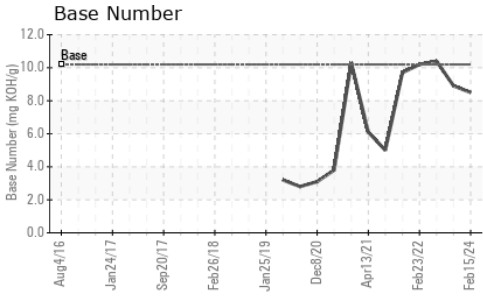

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.1</b>	14.4	14.1

## GRAPHS

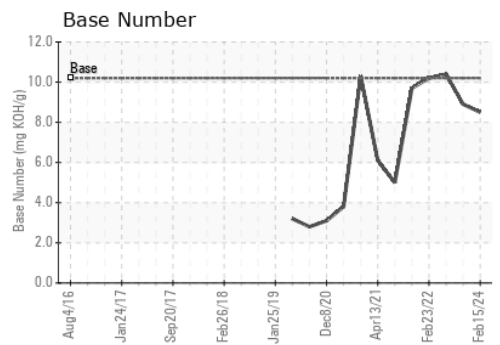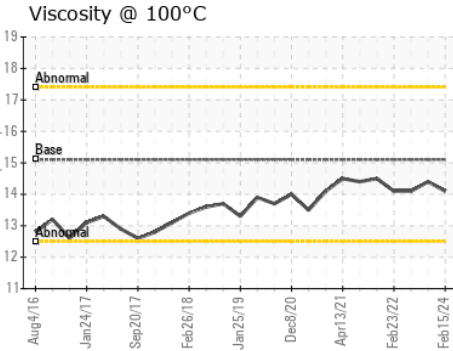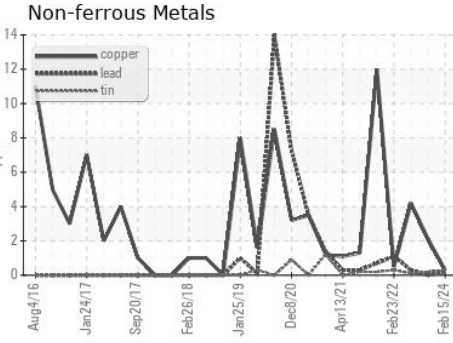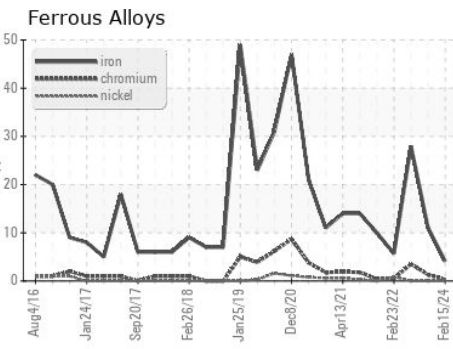

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109505  
**Lab Number** : 06095363  
**Unique Number** : 10888216  
**Test Package** : FLEET

**Received** : 21 Feb 2024  
**Tested** : 22 Feb 2024  
**Diagnosed** : 22 Feb 2024 - Wes Davis

**GFL Environmental - 019 - Greenville/TriEast**  
 415 Staton Road  
 Greenville, NC  
 US 27834

Contact: Spencer Ligon  
 spencer.ligon@gflenv.com  
 T: (800)207-6618

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)