




# OIL ANALYSIS REPORT

Sample Rating Trend

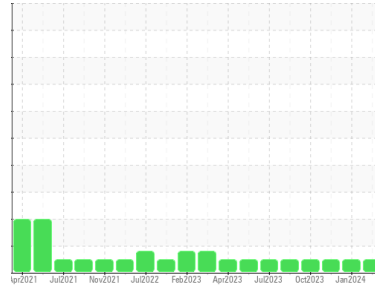

**NORMAL**



Area  
**(24554UA)**  
Machine Id  
**811002**

Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108305</b>	GFL0098216	GFL0098191
Sample Date	Client Info		<b>19 Feb 2024</b>	19 Jan 2024	24 Oct 2023
Machine Age	hrs	Client Info	<b>7469</b>	7456	7072
Oil Age	hrs	Client Info	<b>13</b>	5143	4823
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>6</b>	9	10
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	4	4
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	3	2
Copper	ppm	ASTM D5185m >330	<b>8</b>	9	9
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	3	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>10</b>	13	9
Barium	ppm	ASTM D5185m 10	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m 100	<b>58</b>	60	56
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 450	<b>967</b>	913	930
Calcium	ppm	ASTM D5185m 3000	<b>1089</b>	1093	1040
Phosphorus	ppm	ASTM D5185m 1150	<b>1071</b>	920	988
Zinc	ppm	ASTM D5185m 1350	<b>1312</b>	1210	1247
Sulfur	ppm	ASTM D5185m 4250	<b>3297</b>	3108	2806

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	4	4
Sodium	ppm	ASTM D5185m >216	<b>1</b>	0	3
Potassium	ppm	ASTM D5185m >20	<b>5</b>	3	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.1</b>	0.4	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.7</b>	6.9	7.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.1</b>	18.3	19.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.6</b>	13.5	13.9
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.4</b>	8.3	7.1







# OIL ANALYSIS REPORT

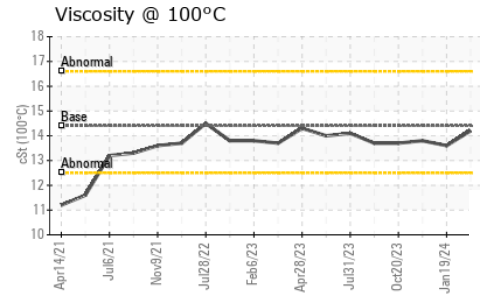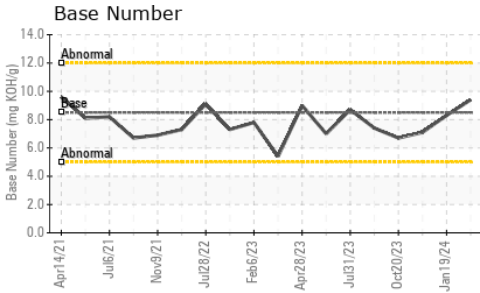

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.2</b>	13.6	13.8

## GRAPHS

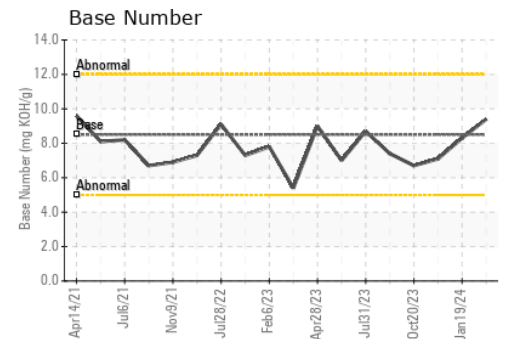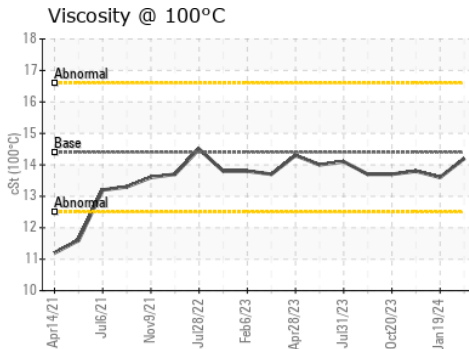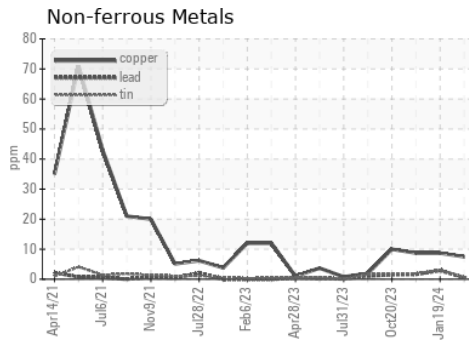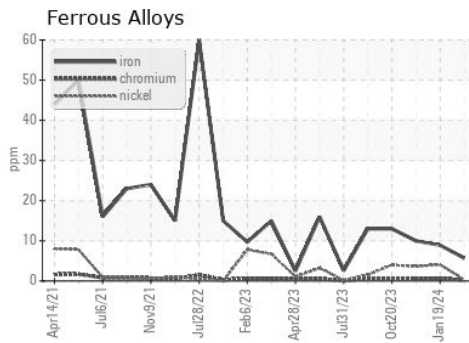

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108305  
**Lab Number** : 06095445  
**Unique Number** : 10888298  
**Test Package** : FLEET

**Received** : 21 Feb 2024  
**Tested** : 22 Feb 2024  
**Diagnosed** : 22 Feb 2024 - Wes Davis

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: