

OIL ANALYSIS REPORT

Area NAT CUTS [98723578] Machine Id LINE 4 CUBER

Hydraulic System Fluid AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

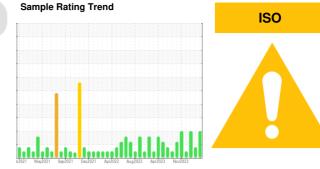

SAMPLE INFORM	<u>ALION</u>	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0117961	PCA0108425	PCA0108426
Sample Date		Client Info		05 Feb 2024	10 Jan 2024	09 Jan 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
CONTAMINATI	ON	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	5	6	6
Chromium	ppm	ASTM D5185m	>20	1	1	2
Nickel	ppm	ASTM D5185m	>20	<1	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	1	1
Lead	ppm	ASTM D5185m	>20	1	2	1
Copper	ppm	ASTM D5185m		13	10	8
Tin	ppm		>20	1	1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron		ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	0	<1	<1
	ppm			-	0	0
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m	05	0	0	0
Magnesium	ppm	ASTM D5185m	25	0	<1	<1
Calcium	ppm	ASTM D5185m	200	0	1	1
Phosphorus	ppm	ASTM D5185m	300			304
Zinc				317	342	
-	ppm	ASTM D5185m	370	16	15	19
-	ppm ppm	ASTM D5185m ASTM D5185m	370	-		
	ppm		370	16 690	15	19
Sulfur	ppm	ASTM D5185m	370 2500 limit/base	16 690	15 808	19 688
Sulfur CONTAMINAN Silicon	ppm TS	ASTM D5185m method	370 2500 limit/base	16 690 current	15 808 history1	19 688 history2
Sulfur CONTAMINAN ⁻ Silicon Sodium	ppm TS ppm	ASTM D5185m method ASTM D5185m	370 2500 limit/base	16 690 <u>current</u> 5	15 808 history1 5	19 688 history2 5
Sulfur CONTAMINAN ⁻ Silicon Sodium	ppm TS ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	370 2500 limit/base >15	16 690 <u>current</u> 5 <1 <1	15 808 history1 5 0	19 688 history2 5 <1
Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANL	ppm TS ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	370 2500 limit/base >15 >20	16 690 <u>current</u> 5 <1 <1	15 808 history1 5 0 <1	19 688 history2 5 <1 <1
Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm	ppm TS ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m method	370 2500 limit/base >15 >20 limit/base	16 690 current 5 <1 <1 <1 current	15 808 history1 5 0 <1 <1 history1	19 688 history2 5 <1 <1 <1 history2
Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm	ppm TS ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647	370 2500 limit/base >15 >20 limit/base >1300	16 690 <u>current</u> 5 <1 <1 <1 current 2 71899	15 808 history1 5 0 <1 <1 history1 1070	19 688 history2 5 <1 <1 <1 history2 ▲ 64382
Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >14µm	ppm TS ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647	370 2500 limit/base >15 >20 limit/base >20 >1300 >320	16 690 current 5 <1 <1 <1 current ▲ 71899 ▲ 14700 ▲ 273	15 808 history1 5 0 <1 <1 history1 1070 ▲ 324	19 688 history2 5 <1 <1 <1 history2 ▲ 64382 ▲ 10383
Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm TS ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	370 2500 limit/base >15 >20 limit/base >320 >320 >80	16 690 current 5 <1 <1 <1 current 2 71899 ▲ 14700	15 808 history1 5 0 <1 <1 history1 1070 ▲ 324 61	19 688 history2 5 <1 <1 <1 € history2 ▲ 64382 ▲ 10383 ▲ 10383 ▲ 183 ▲ 23
Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm TS ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	370 2500 limit/base >15 >20 limit/base >1300 >320 >80 >20	16 690 current 5 <1 <1 <1 current ▲ 71899 ▲ 14700 ▲ 273 ▲ 26 1	15 808 history1 5 0 <1 <1 history1 1070 ▲ 324 61 16	19 688 history2 5 <1 <1 <1 history2 ▲ 64382 ▲ 10383 ▲ 183
Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm TS ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	370 2500 limit/base >15 >20 limit/base >1300 >320 >80 >20 >4	16 690 current 5 <1 <1 <1 current ▲ 71899 ▲ 14700 ▲ 273 ▲ 26	15 808 history1 5 0 <1 history1 1070 ▲ 324 61 16 16 1	19 688 history2 5 <1 <1 <1 bistory2 A 64382 A 10383 A 183 A 23 0
Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm TS ppm ppm ppm INESS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	370 2500 2500 >15 >20 <u>limit/base</u> >20 >320 >80 >20 >20 >4 >3 >3 >17/15/13	16 690 current 5 <1 <1 <1 current 14700 ▲ 273 ▲ 26 1 0 0 ▲ 23/21/15	15 808 history1 5 0 <1 1070 ▲ 324 61 16 16 1 16 1 0 × 17/16/13	19 688 history2 5 <1 <1 <1 0 istory2 ▲ 64382 ▲ 10383 ▲ 10383 ▲ 183 ▲ 23 0 0 0 0
Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm TS ppm ppm ppm INESS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	370 2500 limit/base >15 >20 limit/base >1300 >320 >80 >20 >80 >20 >4 >3	16 690 current 5 <1 <1 <1 current 14700 ▲ 273 ▲ 26 1 0 0 ▲ 23/21/15	15 808 history1 5 0 <1 <1 1070 ▲ 324 61 16 16 1 0	19 688 5 <1 <1 <1 history2 64382 4 10383 4 10383 3 183 23 0 0 0

Contact/Location: Service Manager - KRASPRMO



52

50

42

38

-eb9/21 Alaugh C


Abnorm


Abnorm 40


PC3/71


nr9/27


OIL ANALYSIS REPORT

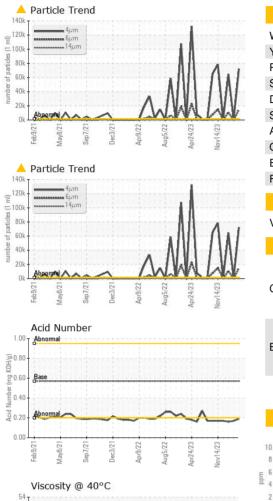

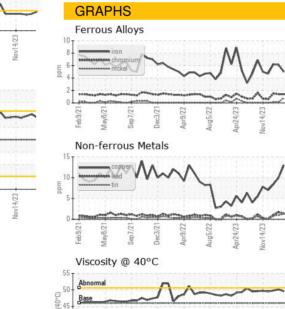

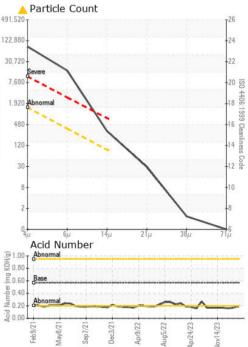

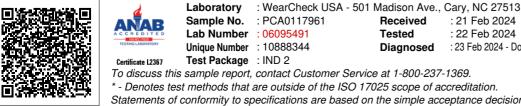

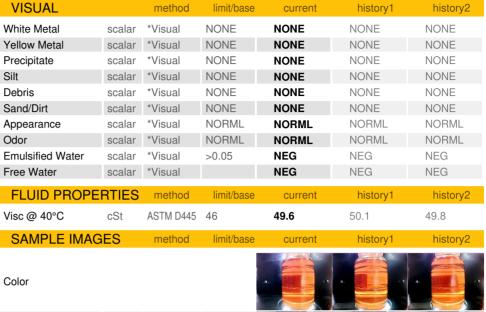

Bottom

Ba

-eb 9/21 Mav8/21


Abnorma 40

Sep7/21

Dec3/71

cSt

35

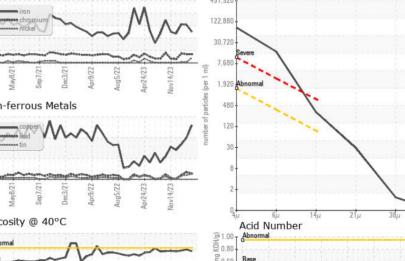

Nov14/23

: 21 Feb 2024

: 22 Feb 2024

Aug5/22

Received

Tested

Apr24/23

Apr24/23

Aug5/22

Contact/Location: Service Manager - KRASPRMO

KraftHeinz - Springfield - Plant 8311 PCA

US 65804

T:

F:

2035 E BENNETT